

Converter RS232 to RS485

Compatible with EIA/TIA RS-232,RS-485 standard

Interface:RS232 interface DB9(holes)

RS485 interface DB9(pin)


Transmission medium:normal cables

twisted-pair cables or shield cables

300 to 115-21BDS transmission speed

Working environment :-10 to 80 °C

Working humidity:5% to 95%

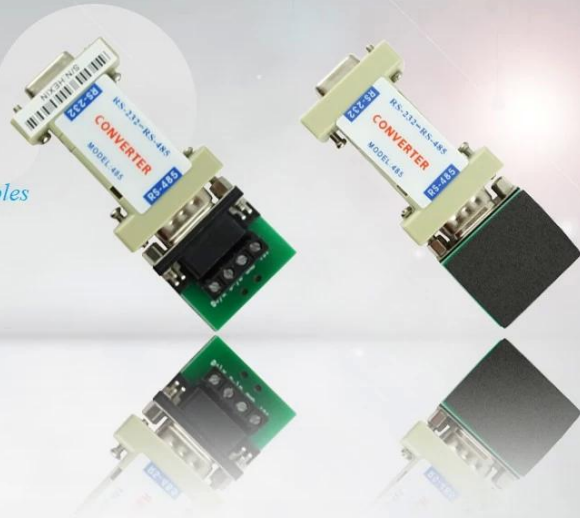

Parameter




品名	RS232 转 RS485
型号	EA-01
尺寸	90 × 33 × 12 (mm)
接口类型	RS232 接口 EIA / TIA RS-232C 转 RS485 接口
接口描述	S-232C DB9 母头 转 RS485 接口 DBP 母头 (DB9 母头 转 DB9 母头)
接口数量	2 个 RS232 接口
接口间距	2.54mm
传输速率	300-115200BPS
传输距离	5 (km) (RS-232) 1200 (km) (RS-485)
接口信号	RS-232: TXD, RXD, RTS, CTS, DTR, DSR, GND RS-485: +, -, GND
接口电压	RS232: 5V, RS485: 5V
接口电流	RS232: 5mA, RS485: 5mA
工作温度	5 ~ 95 °C
工作湿度	-10 °C ~ 85 °C
重量	0.106kg

In-kind shooting





• *Feature*

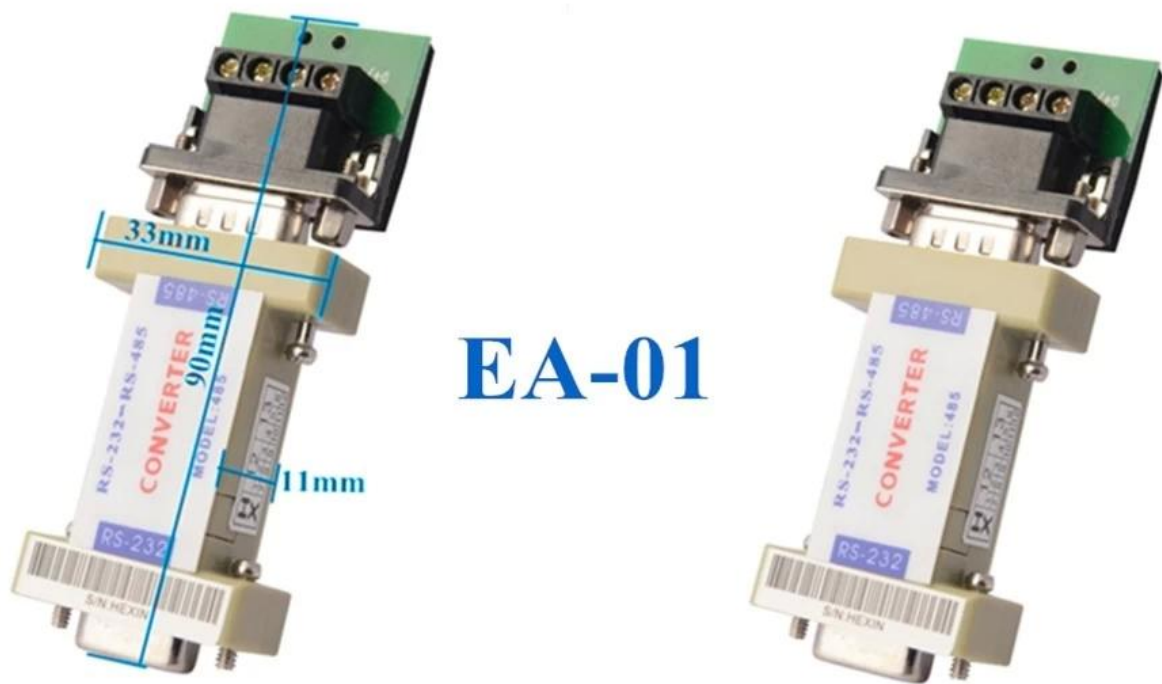

EA-01

Converter RS232 to RS485

Dimension:90×33×12(mm)

*Interface compatible with EIA /
TIA RS-232C, RS-485 standard*

RS-232 terminal DB9 female connector port

RS-485 terminal DBP pin connector port

*RS-232: TXD, RXD, RTS, CTS, DTR, DSR,
DCD, GND*

RS-485: Data +, Data-, GND, 9V+

Relative Humidity:5%~95%

Environment temprature:-10 °C~85 °C

Welcome OEM, 2 years quality warranty

Application

SMQT

Switch Power Supply



Door release button



Standalone controller

Converter (RS232 to RS485) EA-01



PC

Packaging & shipping

SMQT

产品名称 规格 重量	
产品名称	规格 RS232 接口 RS485 EA-01
数量	100pcs 包装规格 见 说明书
包装规格	53 * 40 * 37 (mm)
重量	10KG



Office show

SMQT®



Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....