Converter USB to RS485

Compatible with EIA/TIA RS-232,RS-485 standard
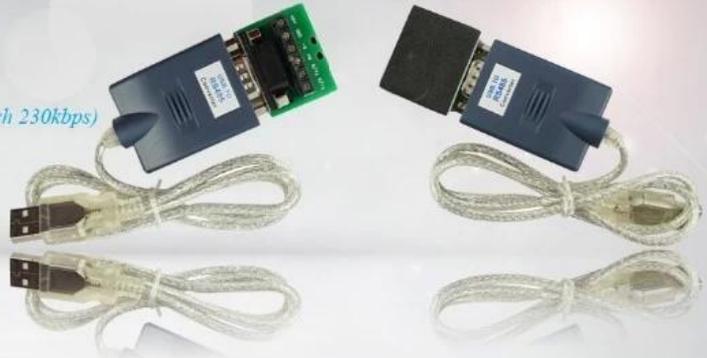
Interface:USB interface

RS-485 interface

Transmission medium:normal cables,twisted-pair cables or shielded cables

57.6kbps in 1200m transmission speed(short distance can reach 230kbps)

Transmission distance:5m(USB port)

1200m(RS485 port)

7-12V input voltage

SMQT

● Parameter

□□□□□□ □□□	□□□□□□ USB □□□□ RS485
□□□□□	EA-02
□□□	94 × 35 × 18 (□□□)
□□□□□□ □□□□	□□ □□□□□□□ □□□□□ EIA / TIA RS-232C□ RS-485 □□□□□□□□□
□□□□□□□□□ □□□□□	□□□□ USB□ □□□□ DB9 □□□□□□□ RS-485 □□□□ □□□□□ DB9 □□□□ □□ □□□□□□ □□□□□ □□□□)).
□□□□□ □□□□□	□□□□□□□ □□□□□ □□□□□□ □□□
□□□□□□□ □□□□□□	□□□□□ □□□□ □□ □□□ □□□□□□□ □□□□□ □□
□□□□□ □□□□	57.6 □□□kbps (230 □□□□ □□□ □□□ □□ □□□□□kbps) 1200 □□□□□□ □□M
□□□□□ □□□	5 □□□ (USB □ 1200 (□□□□□□□ (RS-485 □□□□)
□□□□□	□□□□□ □□□
□□□□□□	□□□□□□ □□ □□□□□□ □□□□
□□□□□ □□□□□□	5□ ~ 95□
□□□□ □□□□□□□□	-10 ℃ ~ 85 ℃
□□□□ □□□□	□□□□
□□□□□ □□□□	0.116kg

● Introduction

USB □□□□□ RS485 □□□ □□□□ □□□□□ □□□□□ □□ □□□□□□ □□□□ □□□□□ □□□□□□□ □□□□.

EA-02

Converter USB to RS485 Interface compatible with EIA / TIA RS-232C, RS-485 standard

Electrical Interface:

USB port, DB9 female connector
RS-485 side, DB9 male connector

Transmission rate:

Up to 57.6kbps (close up to 230kbps rate) in the 1200m distance

Transmission distance:

5 m (USB end) 1200 m (RS-485 terminal)
Suitable for data transmission system
0.116kg weight
Welcome OEM and 2 years quality warranty

● *Installation*

SMQT

switch power supply

Converter USB to RS485 EA-02

Door release button

Access control keypad

PC

●*Office show*

●*Exhibition*

2011 Brazil Fair   2012 Shenyang Fair   2013 Jinan Fair   2013 Shenzhen Fair

2012 Shenyang Fair   2013 Shenyang Fair   2013 Shenzhen Fair   2015 Shenzhen Fair