

Çıkış modunun ayarlanması için dip düğmeli fotoelektrik duman dedektörü



EB-117D2 GİBİ NEDİR?



EB-117D2'S standart paketi hakkında NASIL?



EB-117D2 ANA PARAMETRE

Ürün adı:	Çıkış modunun ayarlanması için dip düğmeli fotoelektrik duman dedektörü
Model numarası:	EB-117D2
Güç kaynağı:	DC 9 ~ 35V
Tel portu:	4 port (Giriş gücü +, giriş gücü, Röle çıkışı (COM), Röle çıkışı (NO veya NC))
Boyut:	100 çap * 60 (mm)
Algılama alanı:	20 metrekare
Alarm göstergesi	Kırmızı LED ışığı
Özellik:	Dip modunu çıkış modunun ayarlanması
İçin uygun:	Yangın alarm paneli sistemi
Kurulum yolu:	Tavana monte
Çalışma sıcaklığı:	-10 Derece Santigrat ~ +50 Derece Santigrat
Çalışma nemi:	0 ~ 90% RH (yoğunlaşma yok)
Ağırlık:	0.18kg
LED:	2 LED ışığı
Malzeme:	ABS muhafazası + PCB kartı
Konut rengi:	Beyaz
Garanti:	2 yıl garanti
OEM:	Hoşgeldin oem

NE ÖZELLİKLERİ EB-117D2 VAR?



1.4 wire fire alarm system photoelectric smoke detector

2.Working power 9~35V DC

3.Standby current :2 mA(24V NO), 13mA(24V NC)

4.Alarm current:18 mA(24V NO),6 mA(24V NC)

5.Alarm indication:Red LED on

6.Wire port: POWER+(In)/POWER-/ COM/

7.With Dip-switch to setting reset mode

8.Suitable for traditional DC24V fire alarm panel system


9.Conformed EN54-7/UL268 standard

10.2 years warranty , welcome OEM


EB-117D2 NASIL ÇALIŞIYOR?



4 wire detectors wiring diagram

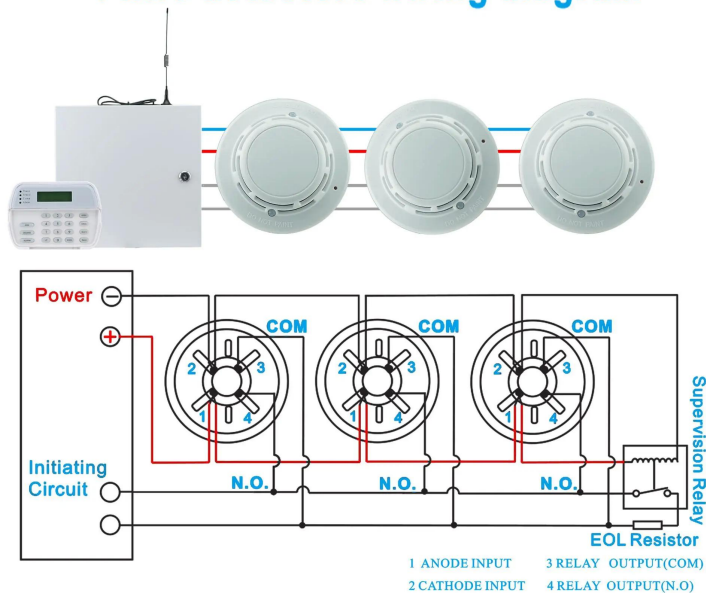

PCB board

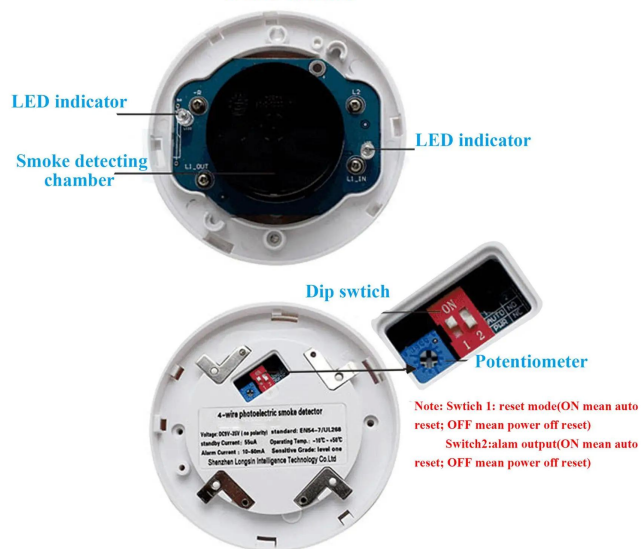

Where to installation?



DİĞER SEÇİM HAKKINDA NASIL?

SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技

