

● Parameter

SMQT

□□□□□ □□	□□□ □□□□□ EA-50F
□□□□□ □□	35.3L * 28W * 6.4H (□□)
□□□□□ □□□□	FM1108
□□□□ □□□□□□□	13.56MHZ
□□□□□□ □□	3-5cm
□□□□□□□ □ □□ □□□□	100000
□□□□	□□□□□ □□□□□
□□□□□	□□□□□□□ □□□□□□□ □□□□□□

● Introduction

SMQT

□□□ □□□□□ □□ □□□□□ □□□□□□□ □□□□□ □□ □□□□□□□ □□□□□□□□□□ **card.This** □□□□□ **proximity** □□□□□ □□□□□ □□□□□□ □□ □□□□□□ □□□□□ □□□□□ □□□□□ □□□□□□ **usaged.**




● Dimesion Picture



● Installations

SMOT

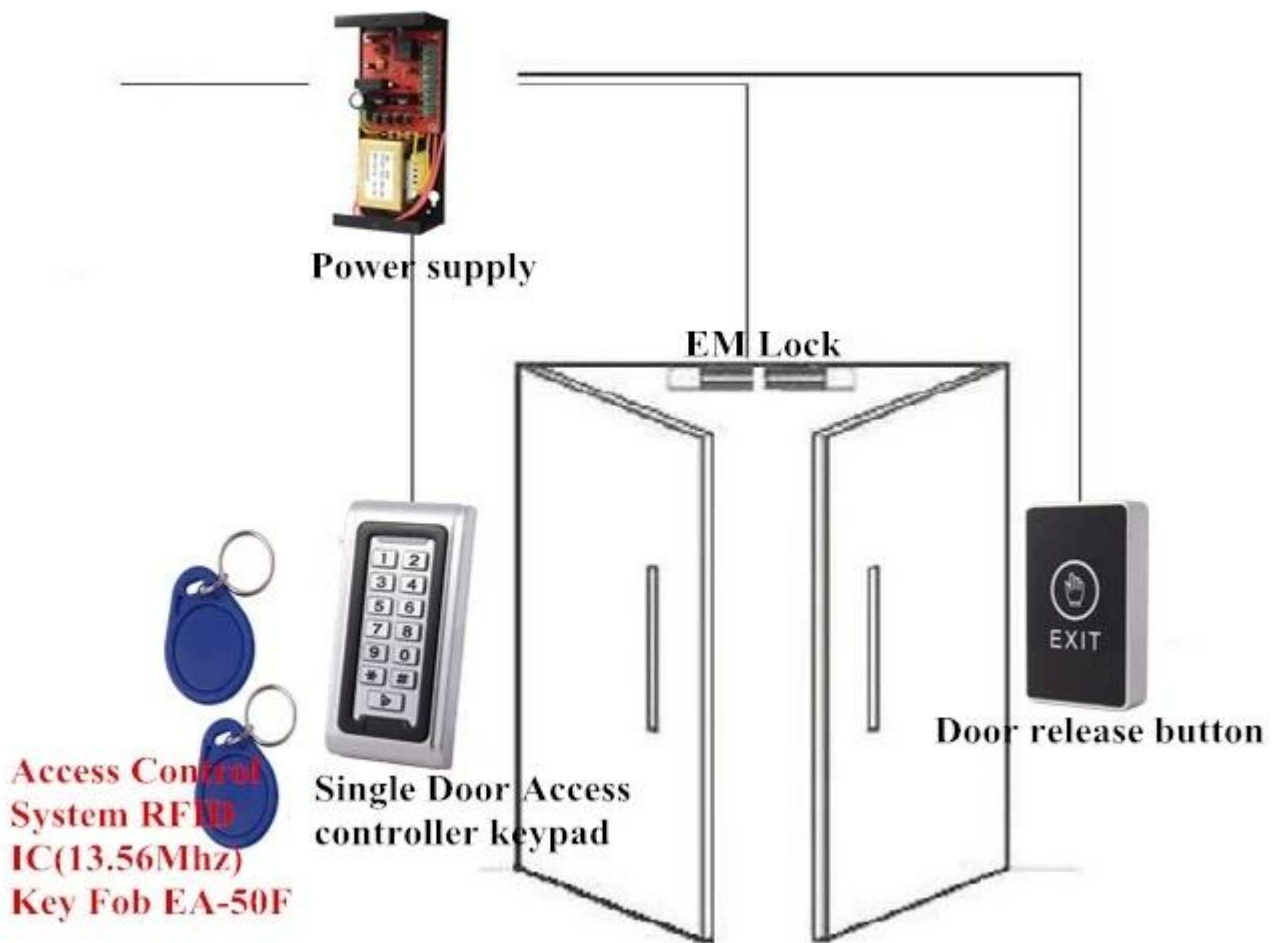

● Features

SMQT®

1. Suitable for various environments, including high temperature, high humidity, and high salt environments.
2. Waterproof.
3. Confidentiality.
4. Sensor.

● Office

SMQT®



● Exhibitions

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....