

Đầu báo khói quang có công tắc nhúng để cài đặt chế độ ngủ ra



NHỮNG GÌ EB-117D2 XEM NHƯ THẾ NÀO?



LÀM THẾ NÀO VỀ gói tiêu chuẩn EB-117D2'S?



BÊN THAM GIA CHÍNH CỦA EB-117D2

Tên sản phẩm:	Đầu báo khói quang có công tắc nhúng để cài đặt chế độ ngõ ra
Số mô hình:	EB-117D2
Cung cấp năng lượng:	DC 9 ~ 35V
Cổng dây:	4 cổng (Công suất đầu vào +, công suất đầu vào-, ngõ ra Relay (COM), ngõ ra Relay (NO hoặc NC))
Kích thước:	100 đường kính * 60 (mm)
Phát hiện khu vực:	20 mét vuông
Chỉ báo báo động	Đèn LED màu đỏ bật sáng
Đặc tính:	Với công tắc Dip để thiết lập chế độ đầu ra
Phù hợp với:	Hệ thống báo cháy
Cách cài đặt:	Trần gắn
Nhiệt độ làm việc:	-10 Độ C ~ ~ 50 độ C
Độ ẩm làm việc:	0 ~ 90% RH (không ngưng tụ)
Cân nặng:	0,18kg
LED:	2 đèn LED
Vật chất:	ABS nhà ở + PCB board
Màu sắc nhà ở:	trắng
Sự bảo đảm:	bảo hành 2 năm
OEM:	Chào mừng OEM

TÍNH NĂNG EB-117D2 CÓ GÌ?



1.4 wire fire alarm system photoelectric smoke detector

2.Working power 9~35V DC

3.Standby current :2 mA(24V NO), 13mA(24V NC)

4.Alarm current:18 mA(24V NO),6 mA(24V NC)

5.Alarm indication:Red LED on

6.Wire port: POWER+(In)/POWER-/ COM/

7.With Dip-switch to setting reset mode

8.Suitable for traditional DC24V fire alarm panel system


9.Conformed EN54-7/UL268 standard

10.2 years warranty , welcome OEM


LÀM THẾ NÀO EB-117D2 LÀM VIỆC?



4 wire detectors wiring diagram

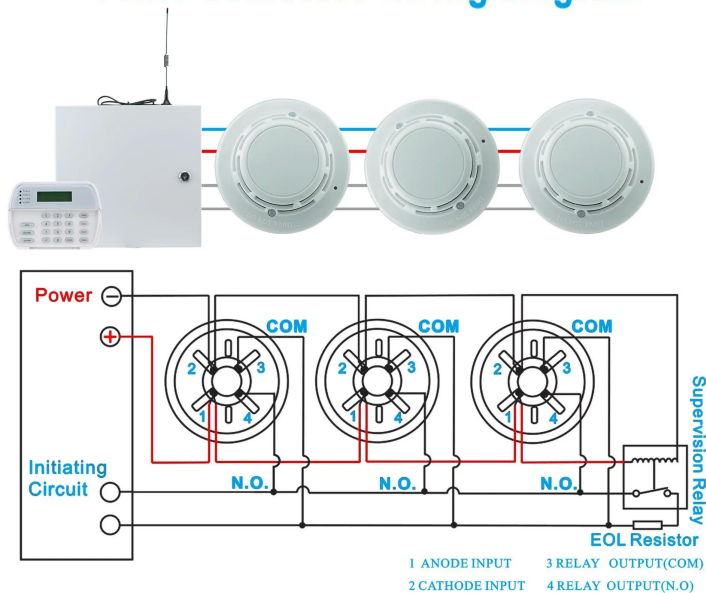

PCB board

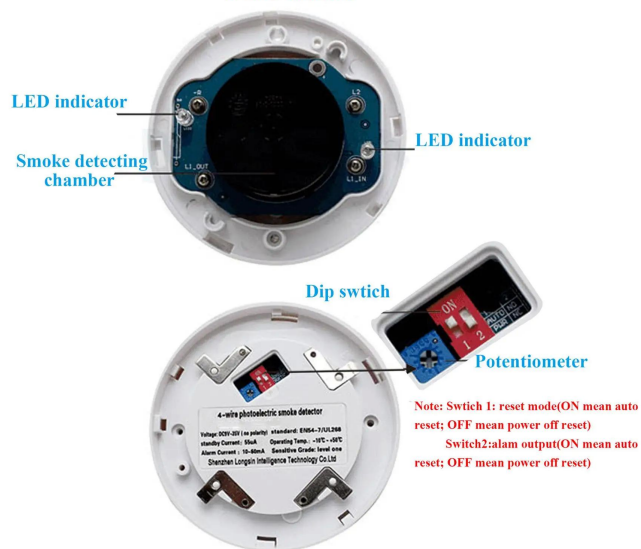

Where to installation?



CÁCH LỰA CHỌN KHÁC?

