

● Parameter

SMQT

EB-134	
Part Number	EB-134
Dimensions	24 L * 14W * (max) 6 H
Material	Black Plastic
Weight	20 ± 5 (mg)
Operating Voltage	≤100VDC
Operating Current	≤500mA
Operating Power	≤10W
Operating Temperature	-40°C to 125°C
Storage Temperature	-55°C to 150°C
Storage Humidity	10% to 90%
Lead Length	10 mm


● Introduction

SMQT

EB-134 is a high-precision, high-stability, and high-accuracy component. It is used in various applications, including power supplies, signal processing, and data conversion. The component is designed to provide reliable performance in a wide range of operating conditions. It is available in a standard package and is easy to integrate into your system. The component is tested to meet the highest standards of quality and reliability. It is a cost-effective solution for your application. The component is available in a standard package and is easy to integrate into your system. The component is tested to meet the highest standards of quality and reliability. It is a cost-effective solution for your application.

● Dimension Picture

SMQT

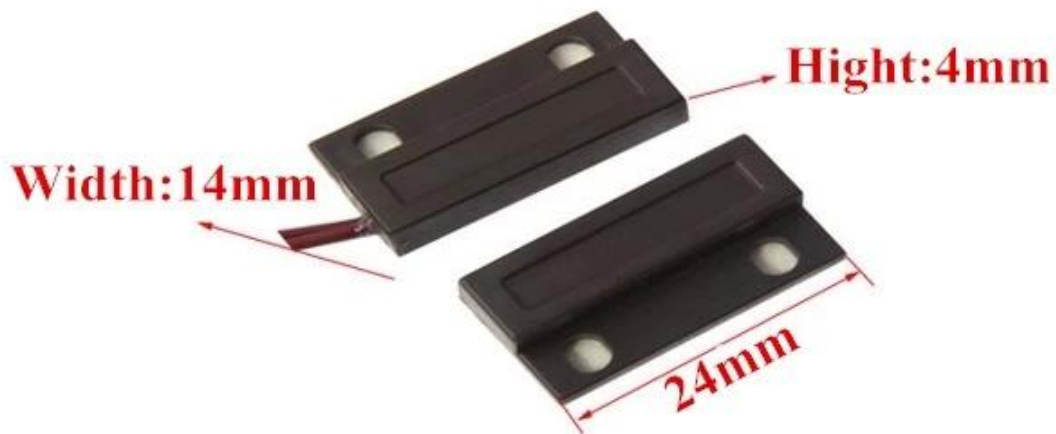

**2 Color optional**



**White**



**Brown**

● Installations

**SMQT**

**Wired Magnetic Door/Window Contact Sensor**



● Packing list

**SMQT**

□□□□□□ □□□□□□ □□□□□□□□□□	
□□□□□□	1000/□□□□
□□□□□□□□ □□□	37.5 29.5 * (W * 20 □□) □
□□□□□	9.76 □□□





● Exhibitions



2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....