

Parameter

SMQT

	EB-141
Material	ABS
Part Number	EB-141
Dimensions	Φ10 * 25 (mm)
Color	Black / Blue / White
Weight	15-20 (g)
Operating Voltage	≤100VDC
Operating Current	≤500mA
Operating Power	≤10W
Operating Temperature	0-100°C
Operating Humidity	10-90%RH
RoHS	Compliant
Lead Time	1-2 weeks
Notes	1. For more information, please contact our sales department.

Introduction

SMQT

ABS material is a thermoplastic polymer.


It is widely used in automotive parts, electronic housings, and industrial components.

ABS is a copolymer of acrylonitrile, butadiene, and styrene. It combines the strength and rigidity of acrylonitrile, the impact resistance of butadiene, and the processability and surface gloss of styrene. This makes ABS a popular choice for injection molding and other manufacturing processes.

For more information, please contact our sales department. We are committed to providing high-quality products and excellent customer service. MENCİ is a leading manufacturer of precision-machined components.

Dimension Picture

SMQT

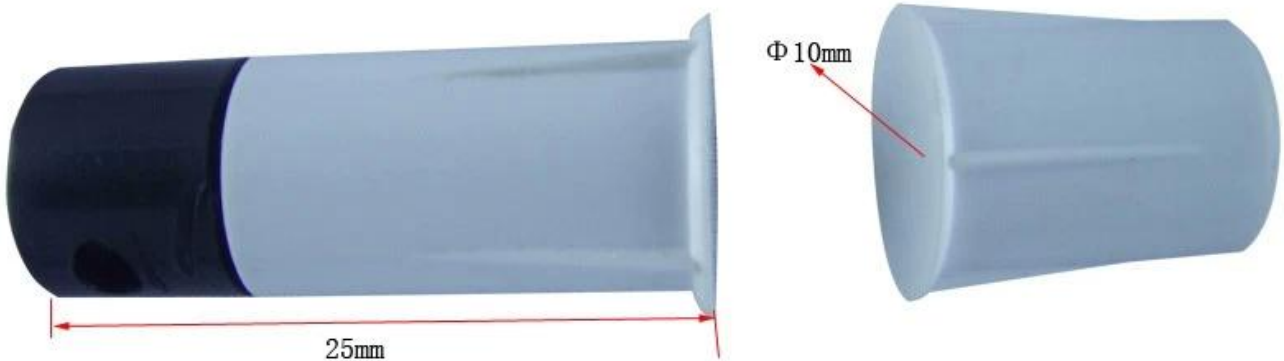


Waterproof seal

Using PC rubber seal,
waterproof and durable,
no leakage.



High quality magnet

Good adsorption, installing,
borehole directly use stability.

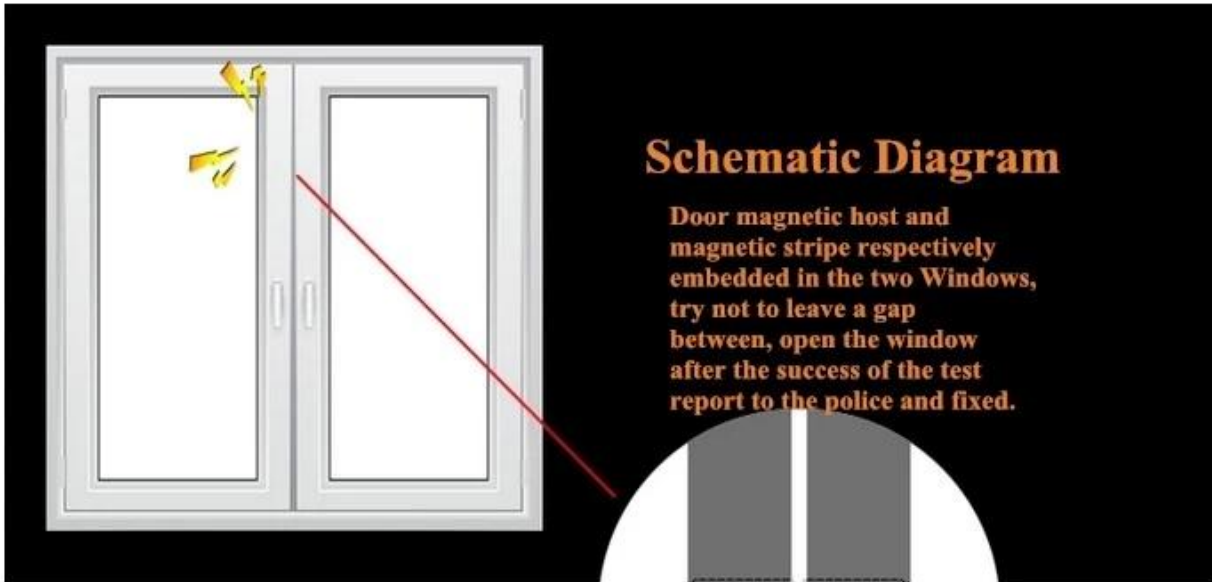

Schematic Diagram

Door magnetic host and magnetic stripe respectively embedded in the two Windows, try not to leave a gap between, open the window after the success of the test report to the police and fixed.

● Packing list

SMQT

磁控玻璃 磁控玻璃 磁控玻璃	
磁控玻璃 磁控	EB-141 磁控玻璃磁控玻璃磁控玻璃磁控玻璃磁控玻璃磁控玻璃磁控玻璃磁控玻璃磁控玻璃磁控玻璃
磁控玻璃	2000 / 磁控玻璃
磁控玻璃磁控玻璃磁控玻璃	37.5 * 29.5 * 20 (mm)
磁控玻璃 磁控玻璃	20.94Kg



● Office

SMQT®



● Exhibitions

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair