

WG IC 13.56MH إشارة التحكم في الوصول رمز الاستجابة السريعة قارئ بطاقة مع
اختياري ID 125KHz



EA-90Q ما الذي يعجبك



EA-90Q'S MAIN PARAMETER

無線電波 規格:	WG 無線電波 規格 無線電波 規格 無線電波 規格 IC 13.56MH ID 125KHz 無線電波 規格
無線電波 規格:	EA-90Q
無線電波 規格:	DC 5 ~ 12V
無線電波 規格:	800mA
無線電波 規格:	WG / RS485 / RS232 / USB / TCP / IP
無線電波 規格:	(無線電波 規格 125) 無線電波 規格 / (無線電波 規格 13.56) 無線電波 規格 無線電波 規格
無線電波 規格 無線電波 規格:	0 ~ 20CM
無線電波 規格 無線電波 規格:	3 ~ 6CM
無線電波 規格 無線電波 規格:	無線電波 規格 無線電波 規格 無線電波 規格
無線電波 LED:	無線電波 無線電波 無線電波 無線電波 :無線電波 無線電波 無線電波 無線電波 :無線電波 無線電波 無線電波 無線電波
無線電波:	86 * 86 * 46 (mm)
無線電波:	無線電波 無線電波 無線電波 無線電波 無線電波
無線電波:	無線電波 ABS + 無線電波 無線電波 無線電波 + PCB 無線電波
無線電波 無線電波	無線電波
無線電波:	0.2KG
無線電波:	2 無線電波 無線電波
OEM:	無線電波 無線電波 無線電波 無線電波

ما المميزات EA-90Q؟



1.Access control QR and RFID Reader with WG output

2.Input voltage DC 4~15V

3.Working current:800mA

4.QR module &Rfid module

5.Recode support QR and One dimensional code

6.QR read speed <200ms, read distance 0~20cm

7.Interface:WG/RS485/RS232/USB/TCP/IP


8.Suitable for all kinds of WG door access control system

9.Rfid module IC(13.56Mhz)/ID(125KHz) optinal

10.Card induction distance 3~6cm

11.2 years warranty , welcome OEM

مناسبة للتثبيت؟ EA-90Q أين هو

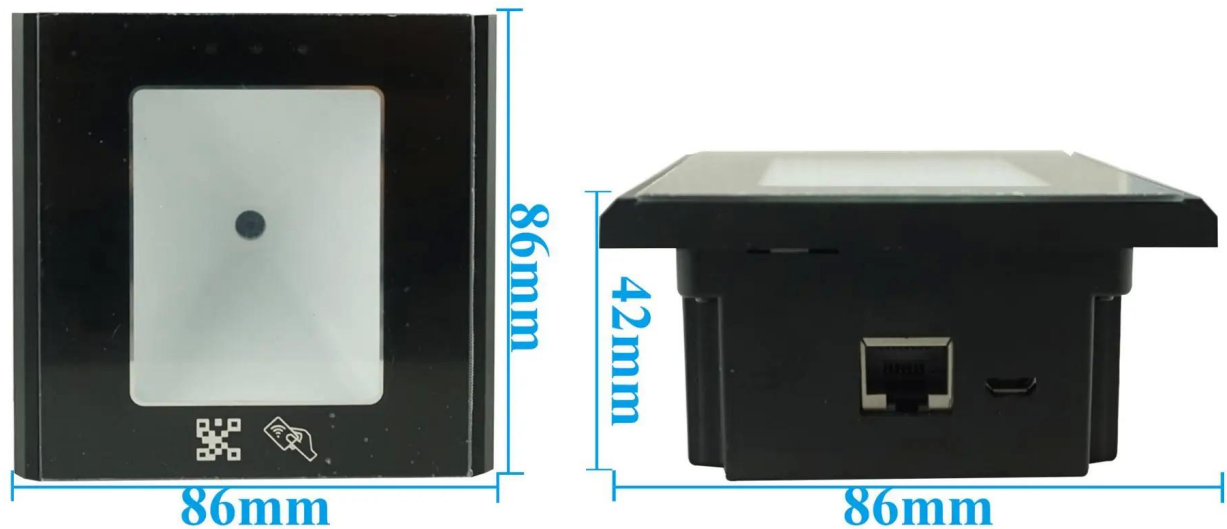

Interface introduction



VCC: DC12+;

GND: DC12-;

D0:DATA0;

D1:DATA1;

LED:light control;

BEEP:beep control ;

TX/R+:RS232+/RS485+;

RX/R-:RS232-/RS485-;

SPK-、SPK+: Temporary undefined;


RJ45: It can be used to connect network and use PC software to set parameters of reader card; it is suitable for HTTP mode communication;

micro-USB: Suitable for USB virtual keyboard and USB virtual serial communication mode;

How to use it?



Mobile phones, screens, paper, plastics, two-dimensional, one-dimensional, color code, deformation code, fouling code accurate sweep

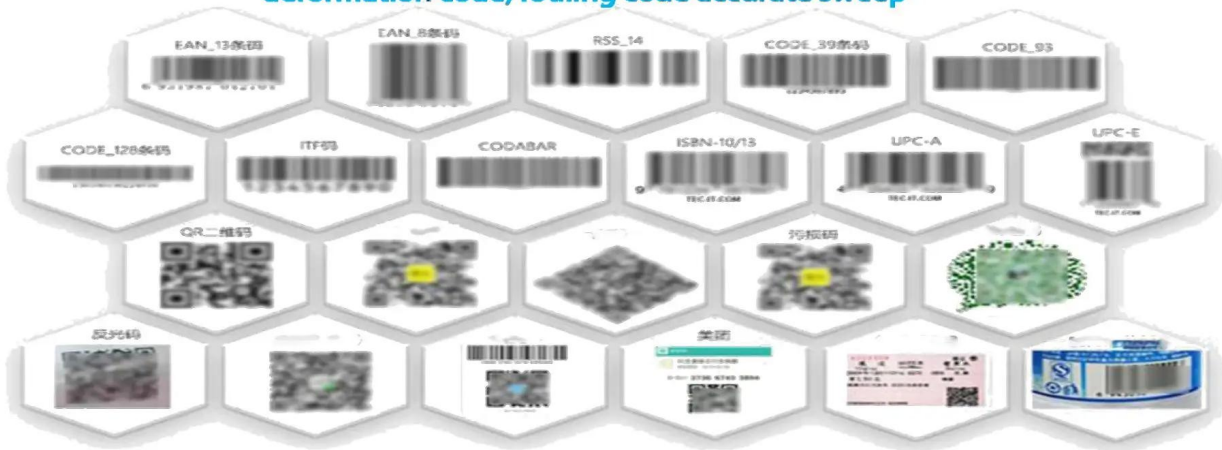

Size of read code: 8-100mm two-dimensional code



.....



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技

