

• Parameter

SMQT®

| | |
|------|----------------|
| 產品名稱 | SMQT 車載音響系統 |
| 產品型號 | EB-166 |
| 適用車種 | ABS 系統 |
| 工作電壓 | DC12V |
| 最大功率 | 30W |
| 工作頻率 | 80HZ ~ 15KHZ |
| SNR | ≥82db |
| 信噪比 | 120DB |
| 工作溫度 | -10 °C ~ 65 °C |
| 尺寸 | 40×95 mm |

• Introduction

SMQT®




□□□□□□ □□ □□□□□□□□ □□□□□□ 120 □□□□□□□□ □□□□□□ □□□□□□□□□□□□□□□□

□□□□□ □□□□□□ □□□□□□ □□□□ □□□□□ □□ □□□□□ □□□□□□
□□ □□□□□□□□ □□□□□ □□□ □□□□ □□□□□□ □□□□□□ □□□□□□ □□□
□□□□□ □□□□□.

• *Dimension*

SMQT®

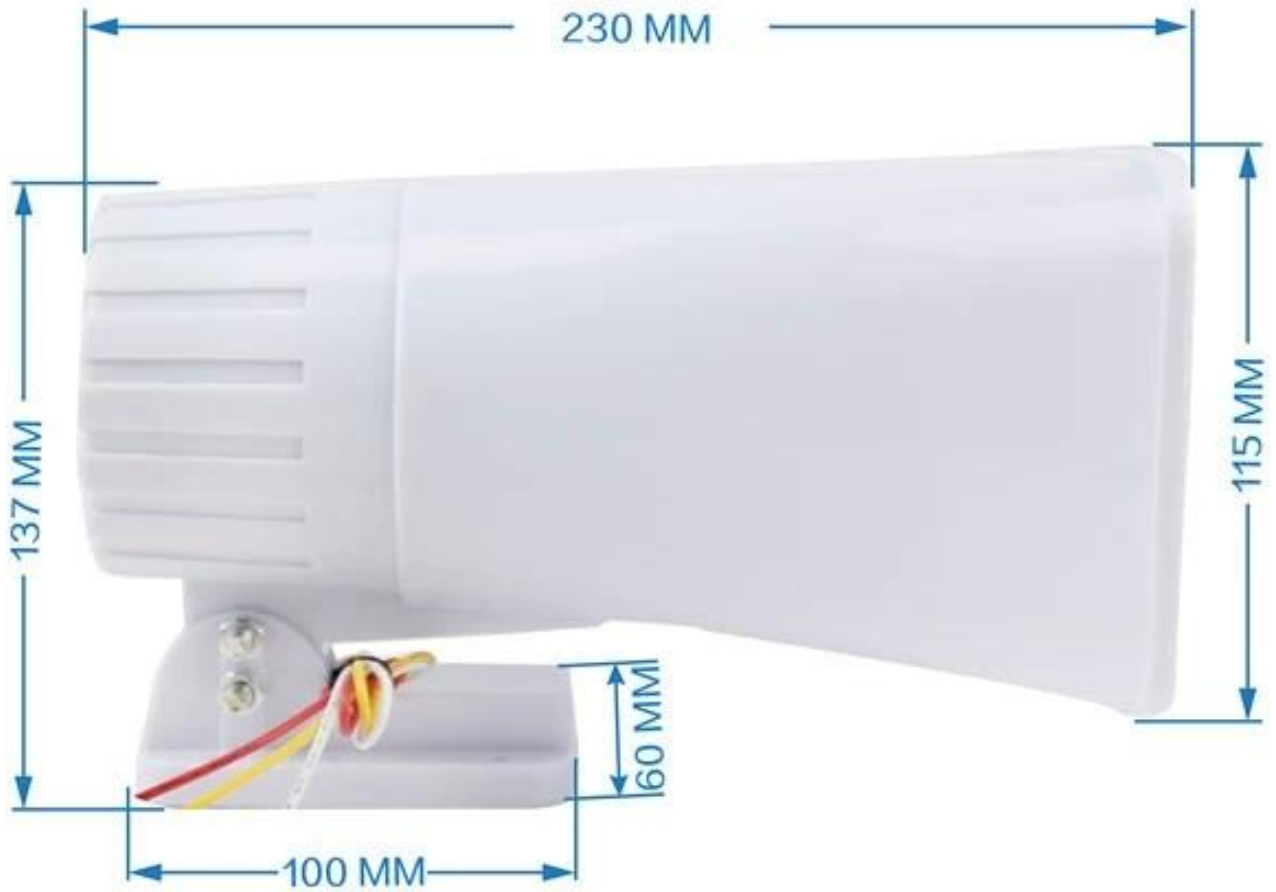

• *Feature*

SMQT®



1

ABS shell

ABS engineering plastics

Adopt ABS material production, good pressure resistance, corrosion resistance, can be used in harsh environment such as toxic, long life not aging.

2

Sounds loud

Alarm sounds great

NV0EOS phonetic chip is applied to make speech processing core, with the stability of the industrial performance. Alarm sounds great, is not afraid of other people can't hear you.



3

Flexible stent

Rotating stents

Can be fixed on the ground, also can be fixed on the wall, can rotate 90 degrees to use, convenient installation.



4

Well-adapted

Wide applicability

Suitable for oil field, high pressure, the mine, toxic sites, car, airport QuDiao, etc.



1. 1 NV020S 2 ABS .
2. 3 .
3. 4 .
5. : .

• *Packaging & shipping*

SMQT[®]



• *Office show*

SMQT[®]



● Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....