

# Wired embedded magnetic contact

NC/NO mode optional


35±5(mm) gap distance

Max voltage≤100VDC, Max current≤500mA

Suitable for metal door or window

White/Brown color optional

24g weight

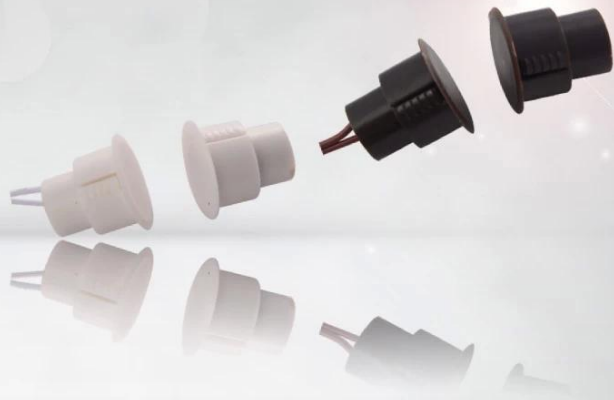

## Parameter



品名	有线嵌入式磁接触器
型号	Emedded 有线嵌入式磁接触器
规格	EB-136
尺寸	Φ19 × 25 (mm)
触点形式	NO / NC (可选)
行程	35 ± 5 (mm)
额定电压	≤100V 直流电压
额定电流	≤500mA
额定功率	≤10W
触点寿命	1000000 (万次) / 100000 (万次)
应用	适用于 ABS 报警系统、防盗报警系统
工作温度	-10 °C ~ 50 °C
重量	24G

## In-kind shooting





• *Feature*

SMQT®



## EB-136



Dimension:  $\phi 19 * 25(\text{mm})$

Material: ABS

Max Gap:  $\leq 40\text{mm}$

Install way: Drill hole install

Wire : 22# wire 40cm

Power : 0.5A 10W

### Fire-proofing materials

Adopt ABS flame retardant material, fire retardant safer, connecting with 22 # wire, total length of 30 cm. Suitable for metal doors and cabinet door, etc.



### Waterproof seal

Using imported PC glue sealing, close the magnet and wiring, waterproof, and durable leakage, using more safe and more comfortable



### Strong magnetism

Magnetic strength, which can be installed directly drilling, stable performance.

# • Packaging & shipping

SMQT®

	□□□□□□ □□□□□□ □□□□□
□□□□□ □□□	Emedded □□□□□□ □□□□□□□□□□ □□□□□□□□□□ EB-136
□□□□□□	600 □□□□□□ □□ □□□□ □□□□□□ □□□□
□□□□□□ □□□□□□ □□□	38 * 30 * 30 (□□)
□□□	16KG



# • Office show

SMQT®



2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....