

## SMQT 4 fils détecteur de fumée et de chaleur composite



À quoi ressemble EB-1178?



## QU'EN EST-IL DU FORFAIT STANDARD D'EB-1178?



### EB-1178 PARAMÈTRE PRINCIPAL

<b>Nom du produit:</b>	<b>SMQT 4 fils détecteur de fumée et de chaleur composite</b>
<b>Numéro de modèle:</b>	EB-1178
<b>Source de courant:</b>	DC 9 ~ 36 V
<b>Taille:</b>	103 diamètre * 53 (mm)
<b>Fonctionnalité:</b>	<b>La fumée et la fonction de détection de chaleur sont composées</b>
<b>Alarme de chaleur:</b>	<b>&amp; gt; 57 Degrés Celsius va alarmer</b>
<b>Zone de détection:</b>	<b>20 mètres carrés (moins de 6m de hauteur d'installation)</b>
Indication d'alarme	Voyant DEL rouge et ampère; alarme sonore
<b>Convient à:</b>	<b>Alarme incendie</b>
<b>Manière d'installation:</b>	Plafond
<b>Température de fonctionnement:</b>	-dix Degrés Celsius ~ +50 Degrés Celsius
<b>Humidité de travail:</b>	0 ~ 95% HR (pas de condensation)
<b>Poids:</b>	<b>0,19 kg</b>
<b>LED:</b>	2 lumières LED
<b>Matériel:</b>	Boîtier en ABS + carte PCB
<b>Couleur du boîtier:</b>	blanc
<b>Garantie:</b>	2 ans de garantie
<b>OEM:</b>	Bienvenue OEM

### QUELS SONT LES FONCTIONS DE L'EB-1178?



**1.Wired heat&photoelectric smoke detector**

**2.Working power 9~36V DC**

3.Standby current : $\leq 0.2$  mA(12V NO) ;  $\leq 4$ mA(12V NC)

4.Alarm current:10 mA(12V NO),7 mA(12V NC)

5.Alarm indication:Red LED on

**6.Wire port: POWER+(In)/POWER-/ COM/NO or NC**

**7.Suitable for fire alarm system**

**8.Conformed GB4715 GB716 EN14604 standard**

**9.2 years warranty , welcome OEM**

## COMMENT FONCTIONNE EB-1178?












# Size



# Module Display

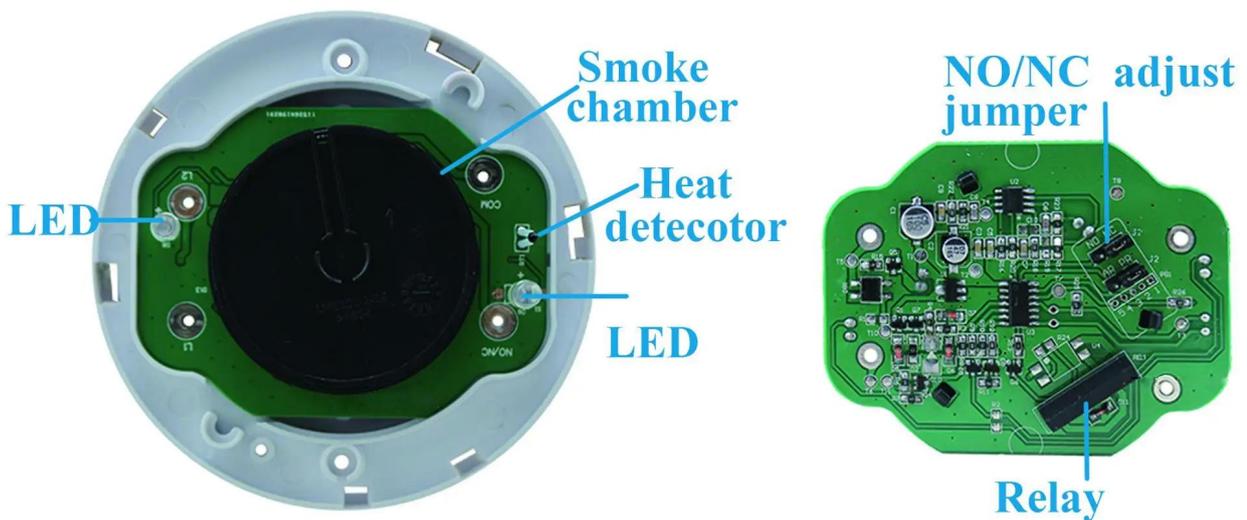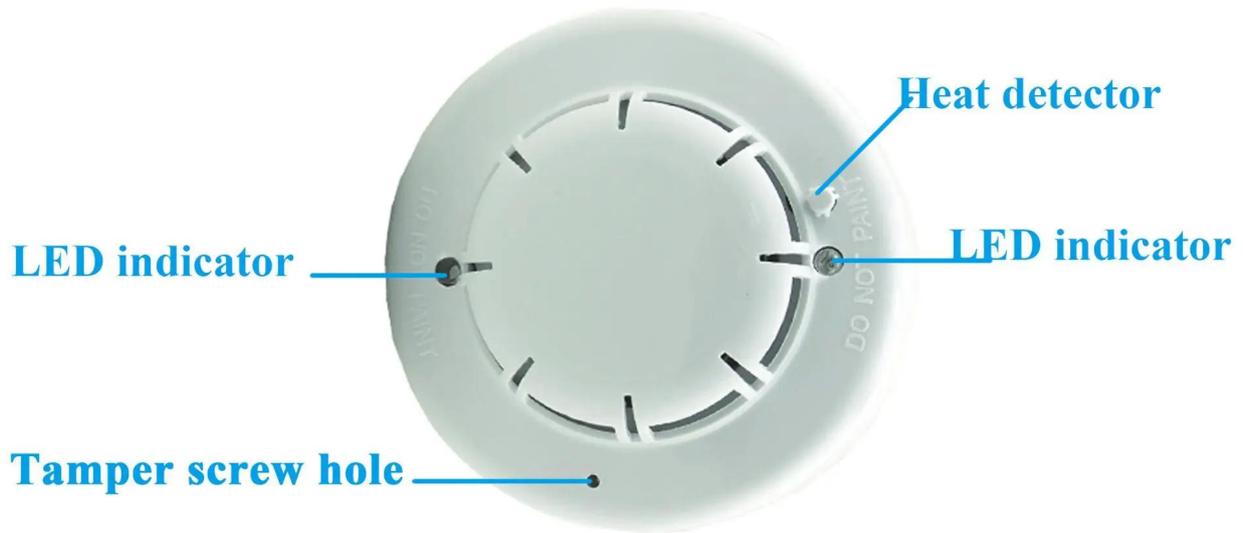

# How to connect wire?

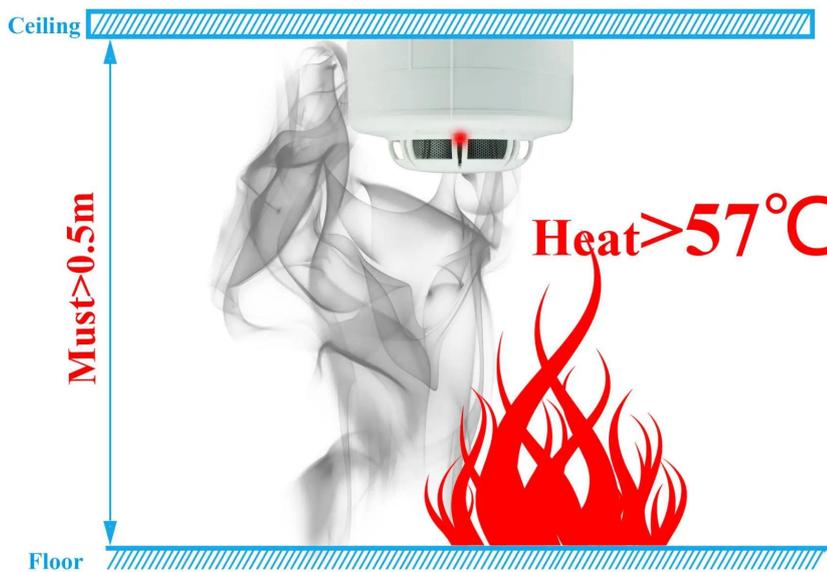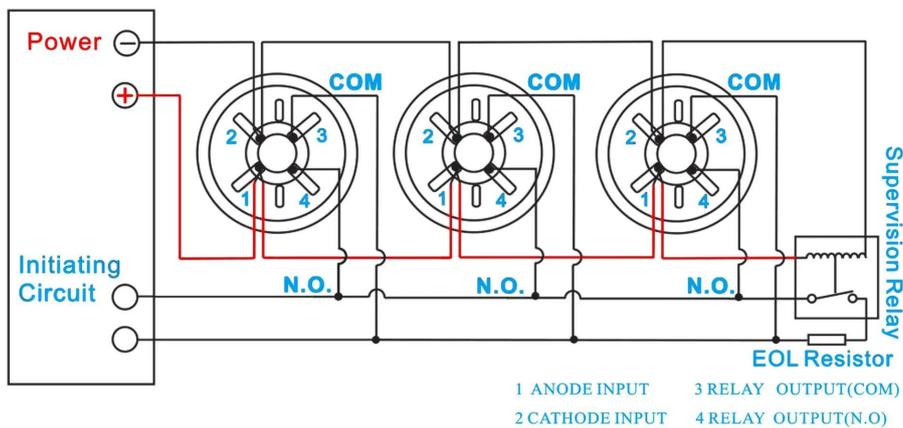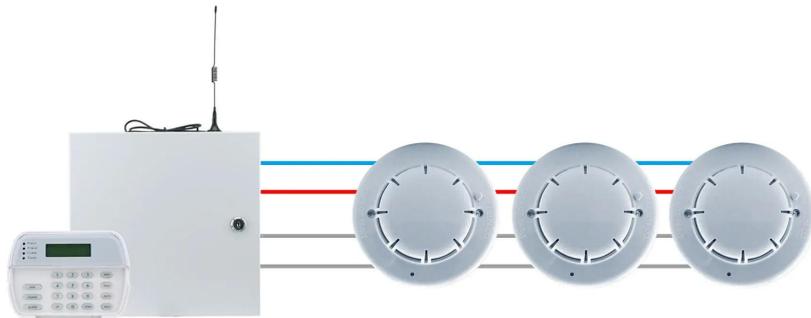

# Where to installation?



BANK



HOSPITAL



SCHOOL



COMPANY



HOME



MALL



HOTEL



APARTMENT

## COMMENT AU SUJET D'AUTRES CHOIX?

