specificazione	
Nome del prodotto	12v DC indoor PIR + rilevatore di movimento a microonde anti-pet
Modello	EB-172
Dimensione	128 * 65 * 41 (mm)
Tensione di funzionamento	9 ~ 13.5V DC
Corrente statica	25uA (sotto alimentazione 12V CC)
Corrente di allarme	15mA (Alimentazione a 12V DC)
Copertura MW	12 * 12m, sensibilità 30% ~ 100% regolabile
Copertura PIR	12 * 12m
Angolo di rilevamento	110 °
Temperatura di lavoro	-10 ℃ ~ 50 ℃
Temperatura di conservazione	-25 ℃ ~ 65 ℃
Anti-EMI	& Gt; 300V / M
Interferenza anti-luce	& Gt; 6500LUX
Colore	bianca
Peso	0.1kg

Quali caratteristiche del nostro rilevatore di microonde 172PIR +?

1.Wired MW+PIR intelligent motion detector

2.9~13V DC power supply

3.3 LED indicator light

4.Compatible all kinds of alarm system's wired zones

5.2 years warranty , welcome OEM

SCARICO IN GOMMA

Q C
PASSED

TAMPER
023-02
BL1000
PH1215160206

TAMPER
023-02
BL1000
PH1215160206

023-02
BL1000
PH1215160206
TAMPER
PULSE

ALPHA

ALPHA
Q C
PASSED

PIR Detector
Main Feature
• Anti-burn ABS Shield
• LED ON/OFF Optional
• Auto Temperature Compensation reducing false alarm
• Pulse Lount Optional for different environment
CE
2

COME USARLO

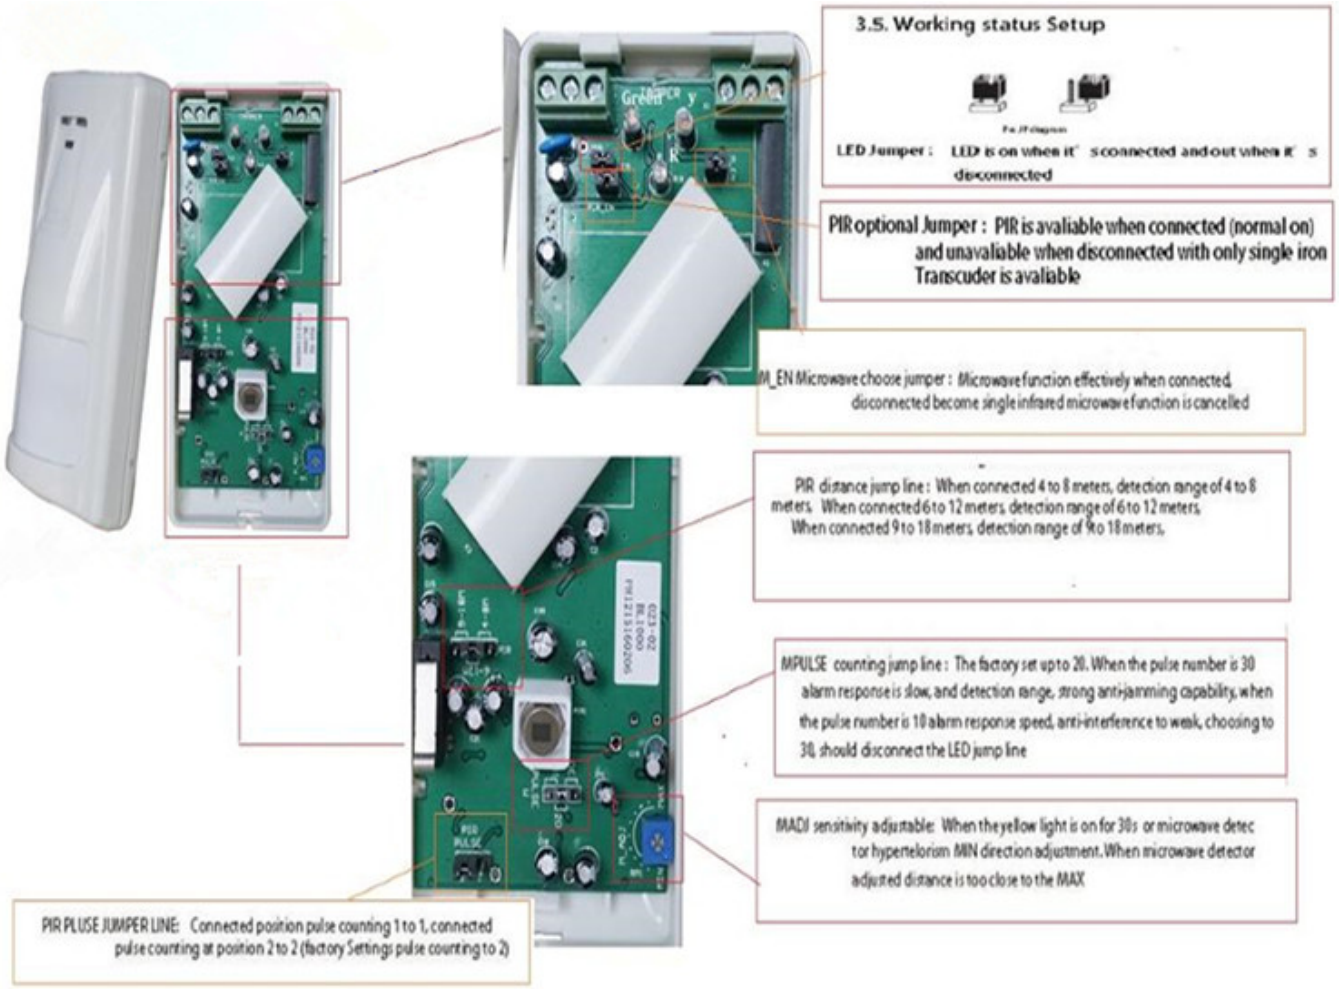
3.5. Working status Setup
LED Jumper : LED is on when it' s connected and out when it' s disconnected
PIR optional Jumper : PIR is avaliable when connected (normal on) and unavaliable when disconnected with only single iron Transcuder is avaliable
M_EN Microwave choose jumper : Microwave function effectively when connected, disconnected become single infrared microwave function is cancelled
PIR distance jump line : When connected 4 to 8 meters, detection range of 4 to 8 meters. When connected 6 to 12 meters, detection range of 6 to 12 meters. When connected 9 to 18 meters, detection range of 9 to 18 meters.
MPULSE counting jump line : The factory set up to 20. When the pulse number is 30 alarm response is slow, and detection range, strong anti-jamming capability, when the pulse number is 10 alarm response speed, anti-interference to weak, choosing to 30, should disconnect the LED jump line
MADJ sensitivity adjustable: When the yellow light is on for 30s or microwave detector hypertelorism MIN direction adjustment. When microwave detector adjusted distance is too close to the MAX
PIR PLUSE JUMPER LINE: Connected position pulse counting 1 to 1, connected pulse counting at position 2 to 2 (factory Settings pulse counting to 2)

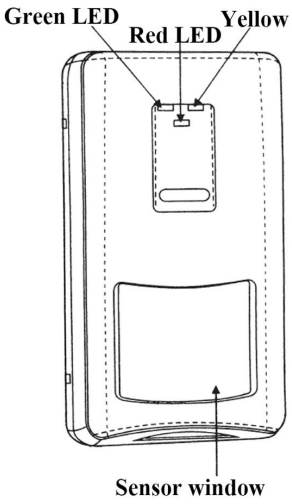

Apperance

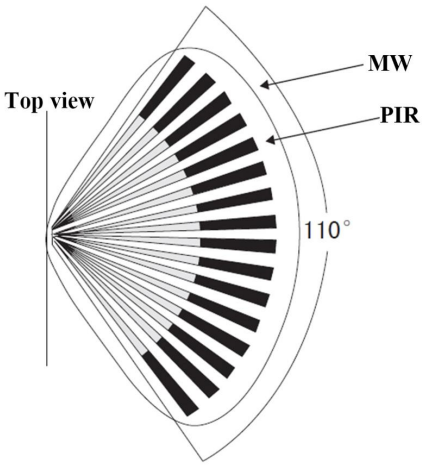

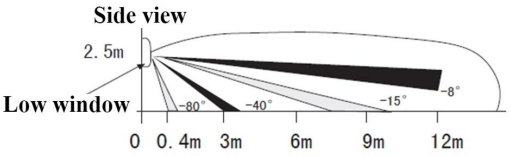

Detecting distance

MW+PIR+Intelligent Motion Detector

EB-172

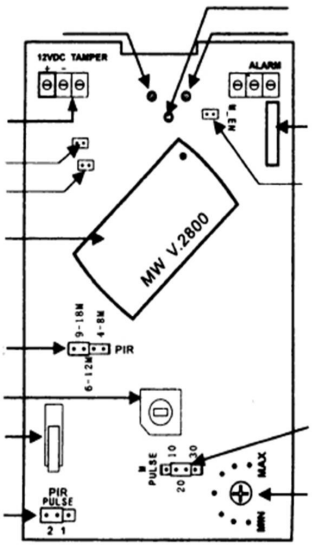

PCB board



Common wiring way

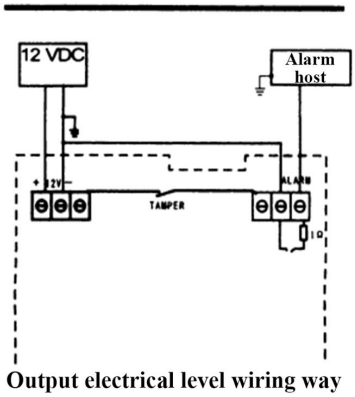

Output electrical level wiring way

Wiring way

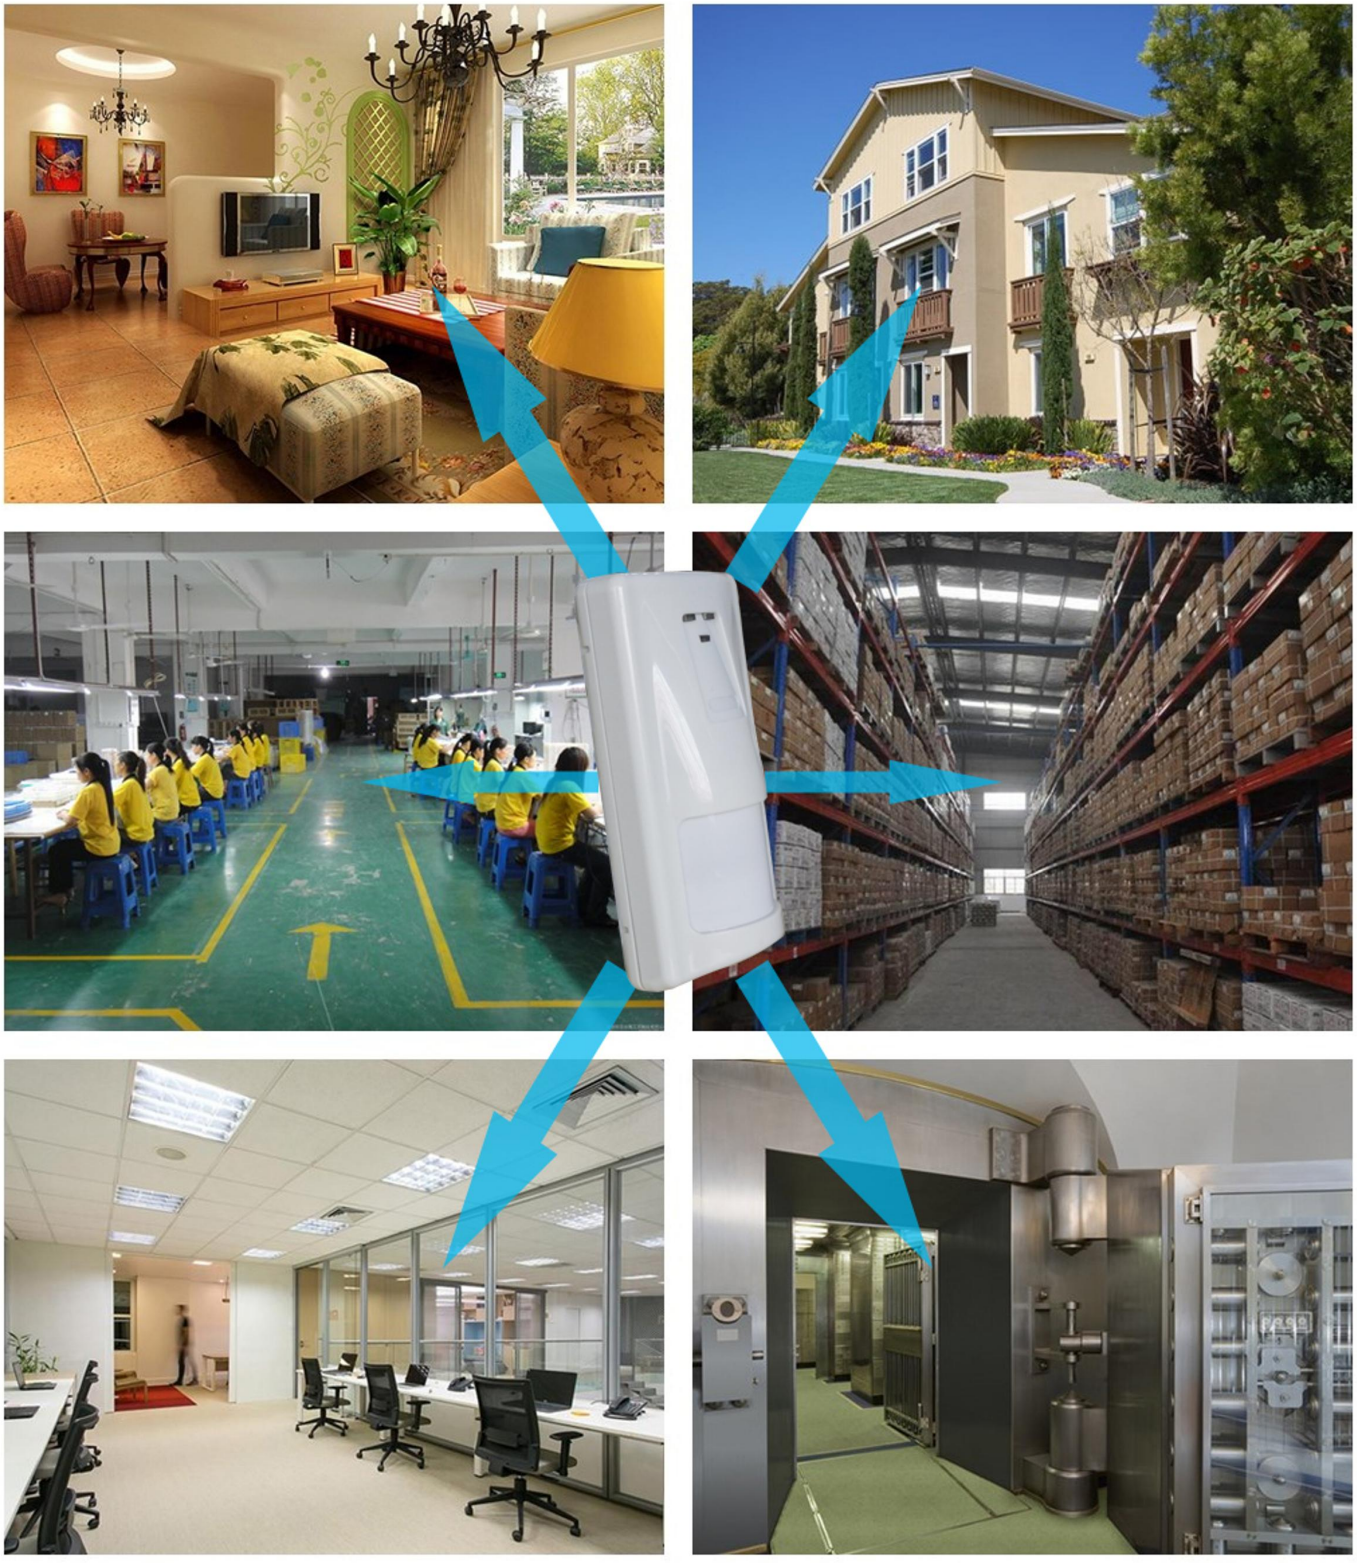

This model wired motion detector product is widely use in all kinds of burglar alarm system, Such as Villa ,Home ,Factory, Warehouse, Office, Bank etc.

ARTICOLI CORRELATI

IMBALLAGGIO & SPEDIZIONE

OFFICE SHOW

CLIENTE

ESPOSIZIONE

CERTIFICAZIONE

FAQ

D: Posso avere un ordine di esempio?
UN:Sì, siamo disposti a offrire l'ordine di prova per voi per la prova di qualità. I campioni misti sono accettabili.

D: Qual è il tempo di consegna?
UN:Il campione ha bisogno di 1-3 giorni lavorativi, il tempo di produzione di massa ha bisogno di 10-15 giorni lavorativi per ordinare meno di 5000pcs.

D: Hai un limite MOQ?
UN:EXW MOQ è 100pcs sotto scatola vuota.

D: Come spedite le merci e quanto tempo ci vogliono arrivare?
UN:Il campione verrà inviato tramite un servizio di spedizione opzionale (corrieri, aria e mare). Il tempo di consegna dipende dal servizio di spedizione.

D: Come procederemo l'ordine se ho il logo da stampare?
UN:In primo luogo, prepareremo opere d'arte per la conferma visiva. Se il colore e la posizione sono giusti, lo faremmo fare campionamento in primo luogo dalla fabbrica di stampa di seta e prendere l'immagine per la seconda conferma prima produzione di massa.