

Wired embedded magnetic contact

NC/NO mode optional


35±5(mm) gap distance

Max voltage≤100VDC, Max current≤500mA

Suitable for metal door or window

White/Brown color optional

24g weight

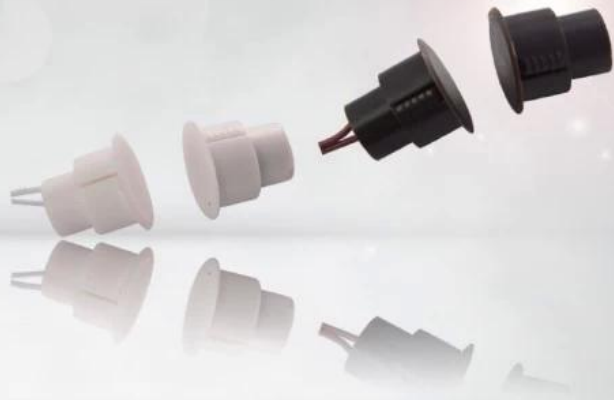

Parameter

SMQT

EB-136	
name	EB-136
model	EB-136
size	Φ19 * 25 (mm)
color	White / Brown
gap distance	35 ± 5 (mm)
max voltage	≤100VDC
max current	≤500mA
max power	≤10W
application	ABS, door, window, etc.
material	ABS / PC
weight	24G

Introduction

SMQT

The EB-136 magnetic contact is a high-quality, reliable component designed for use in metal doors and windows. It features a compact, cylindrical design with a diameter of 19mm and a length of 25mm. The contact is available in white and brown colors and is suitable for use in ABS, door, and window applications. It has a maximum voltage rating of 100VDC and a maximum current rating of 500mA. The contact is made of ABS/PC material and weighs 24g. It is a wired embedded magnetic contact that provides a secure and reliable connection for your application.

PRODUCT PICTURE



PRODUCT FEATURE



EB-136



Dimension: $\phi 19*25(\text{mm})$

Material: ABS

Max Gap: $\leq 40\text{mm}$

Install way: Drill hole install

Wire : 22# wire 40cm

Power : 0.5A 10W

Fire-proofing materials

Adopt ABS flame retardant material, fire retardant safer, connecting with 22 # wire, total length of 30 cm. Suitable for metal doors and cabinet door, etc.



Waterproof seal

Using imported PC glue sealing, close the magnet and wiring, waterproof, and durable leakage, using more safe and more comfortable



Strong magnetism

Magnetic strength, which can be installed directly drilling, stable performance.







● Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....