

Wired magnetic contact sensor

NC/NO mode optional


20±5(mm) gap distance

MAX voltage≤100V DC,MAX current≤500mA

Suitable for wooden door or window

White/Brown color optional

12g weight

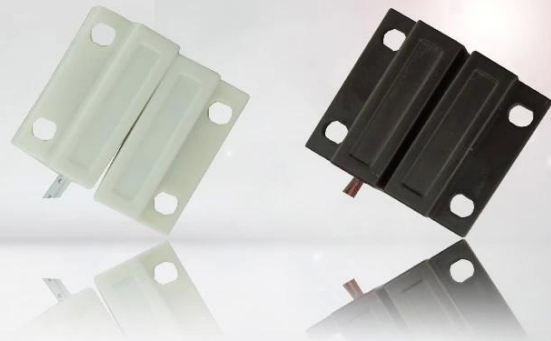

• Parameter



型番	EB-133
寸法	27 × 41 × 8 (mm)
接点モード	NO / NC (オプション)
隙間	20 ± 5 (mm)
動作電圧	≤100V DC
動作電流	≤500mA
消費電力	≤10W
材質	ABS (オプション) / 樹脂
適用	ABS 磁気センサー
動作温度範囲	-10 °C ~ 50 °C
重量	12G

• In-kind shooting





• *Feature*

SMQT®



EB-133

Dimension:27×41×8(mm)

Fireproof ABS material shell

NC/NO mode optional(NO mode need OEM)

Max voltage≤100VDC, Max current≤500mA

Suitable for wooden door or window

White/Brown color optinal

12g weight

2 years quality warranty,welcome OEM

•Packaging & shipping

SMQT

	□□□□□□ □□□□□□ □□□□□
□□□□□□ □□□	□□□□□□ □□□□□□□□□□ □□□□□□□□□□ □□□□□ EB-133
□□□□□□	1600 □□□□□□□□ □□ □□□□ □□□□□□□□ □□□□
□□□□□□ □□□□□□ □□□	38 * 30 * 30 (□□)
□□□	20 □□kg



WE LOGISTICS



• Office show

SMQT



• Exhibition

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair