


**4 na usok sa wire detektor para sa sistema ng alarma ng sunog na may
WALANG NC output madaling iakma**



ANO ANG EB-117B TINGNAN KATULAD?

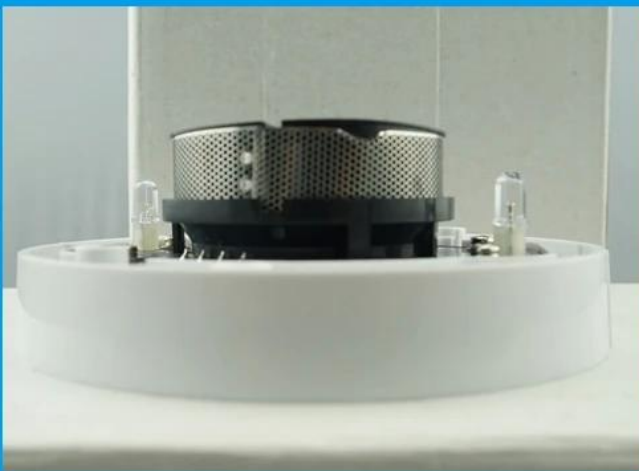

PAANO TUNGKOL SA standard package ng EB-117B?



EB-117B'S MAIN PARAMETER

Produkto Pangalan:	4 detektor ng usok ng wire para sa alarma ng sunog system na may NO NC output adjustable
Numero ng modelo:	EB-117B
Kapangyarihan supply:	DC 9 ~ 35V
Wire port:	4 port (Input power +, input power-, Relay output (COM), Ang output ng relay (NO o NC))
Laki:	100 lapad * 60 (mm)
Detecting area:	20 square metro
Indikasyon ng alarm	Red LED light on
Angkop para sa:	System panel ng alarma ng sunog
Ang paraan ng pag-install:	Naka-mount ang kisame
Temperatura ng Paggawa:	-10 Degrees Celsius ~ +50 Degrees Celsius
Paggawa ng halumigmig:	0 ~ 90% RH (walang kondensasyon)
Timbang:	0.18kg
LED:	2 LED na ilaw
Material:	ABS pabahay + PCB board
Kulay ng pabahay:	White
Garantiya:	2 taon na warranty
OEM:	Maligayang pagdating OEM

ANO MGA TAMPOK EB-117B MAYROON?



1.4 wire fire alarm system photoelectric smoke detector

2.Working power 9~35V DC

3.Standby current :2 mA(24V NO), 13mA(24V NC)

4.Alarm current:18 mA(24V NO),6 mA(24V NC)

5.Alarm indication:Red LED on

6.Wire port: POWER+(In)/POWER-/ COM/

7.Suitable for fire alarm panel system


8.Conformed EN54-7/UL268 standard

9.2 years warranty , welcome OEM

PAANO GINAWA ANG EB-117B PAG-AARAL?



4 wire detectors wiring diagram

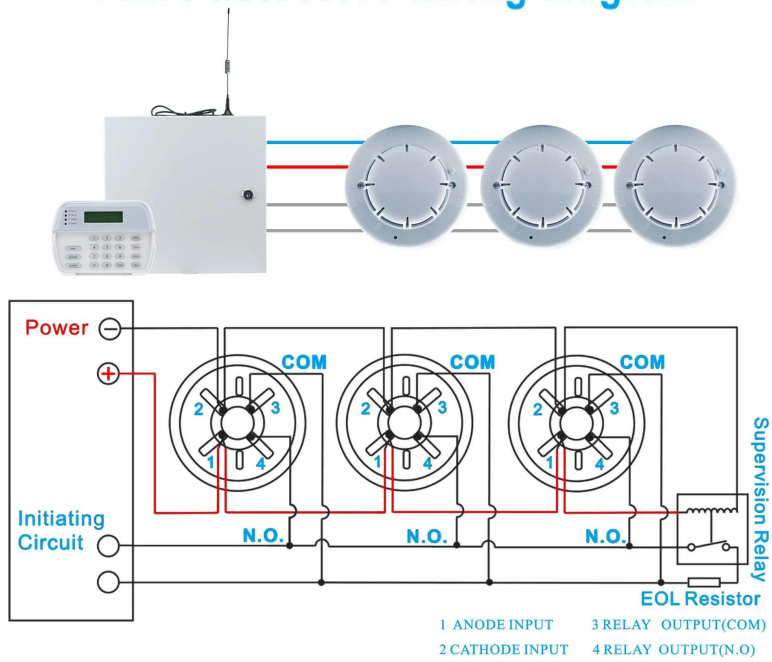

PCB board display



Where to installation?



Mall



Library



Bank

PAANO TUNGKOL SA IBANG PILIPINAS?

