

Detektor ng usok ng sigarilyo



Parameter	
Pangalan:	Detektor ng usok ng sigarilyo
Laki:	Ø106mm * 59mm
Paggawa ng Boltahe:	9V 6F22 baterya
Kasalukuyang Standby:	≤15uA
Kasalukuyang Alarm:	≤56mA
Buhay sa Paggawa ng Baterya:	Mas mababa sa 1 taon
Tagapagpahiwatig ng Power:	Red LED
Tagapagdulot ng alarm:	Red LED flash blink
Presyon ng Tunog:	85dB / m
Temperatura ng Paggawa:	-10 ° C ~ 50 ° C
Paggawa ng Humidity:	≤95% RH
Pagpapadala ng Distance:	& lt; 100m (bukas na lugar)
Ipatupad ang criterion:	EN14604
Detecting area:	40 metro kuwadrado kapag taas ang pag-install sa pagitan ng 6 hanggang 12 metro. 20 square meters kapag taas ang pag-install sa loob ng 6 na metro.

Ano ang mga katangian ng detektor ng usok ng sigarilyo?



9V 6F22 battery,wireless output 315MHz or433MHz

Sound&flash alarm wireless fire alarm smoke detector

Dust-proof,moth-proof and anti-Interference function

Suitable for detecting the smoke in house,shop,hotel...


2 years quanlity,welcome to do OEM and ODM

IN-KIND SHOOTING



APLIKASYON

Standalone Gas detector

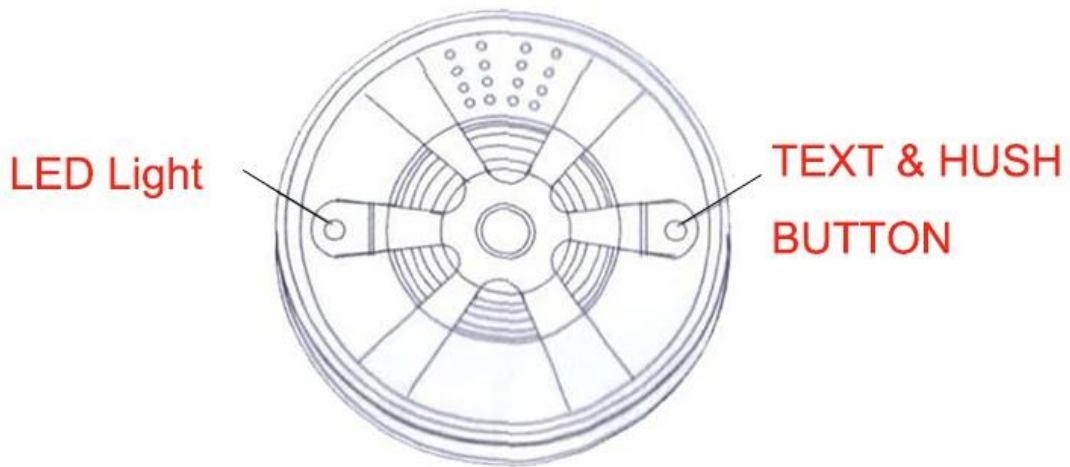

The detector adopts the reflection principle of smoke particles that can reflect infrared light. The main circuit includes a MCU processing Section, an infrared-emitting portion and an infrared receiving portion.



Detector will get into normal working state after connecting battery power, LED will flash once per every 42 seconds.

PAANO TUNGKOL SA IBANG PILIPINAS?

