

Shutter door magnetic contact sensor

NO/NC code mode optional

60±10(mm) gap distance

Mode A&B: Max voltage≤100VDC

Max current≤500mA

Mode C: Wireless 433mhz(1527),12V DC

Alloy-zn and alloy-al Material

Suitable for shutter door

Wieght: A:210g B:280g C:290g



• Parameter

SMQT®

型號	EB-137
尺寸	106 × 38 × 10 (mm)
接點類型	NO / NC (可選)
安裝間隙	60 ± 10 (mm)
工作電壓 (A/B/C)	≤100V DC (A/B) C: 12VDC
最大電流 (A/B)	≤500mA
最大功率 (A/B)	≤10W
材料	合金鋅 / 合金鋁
重量 (A/B/C)	A: 0.21 kg B: 0.28 kg C: 0.29 kg
無線頻率	433MHz (1527chip)
WIRELESS 電池	鋰電池 & 100mAh

• In-kind shooting

SMQT®




• *Feature*

SMQT

EB-137A

EB-137B

EB-137C

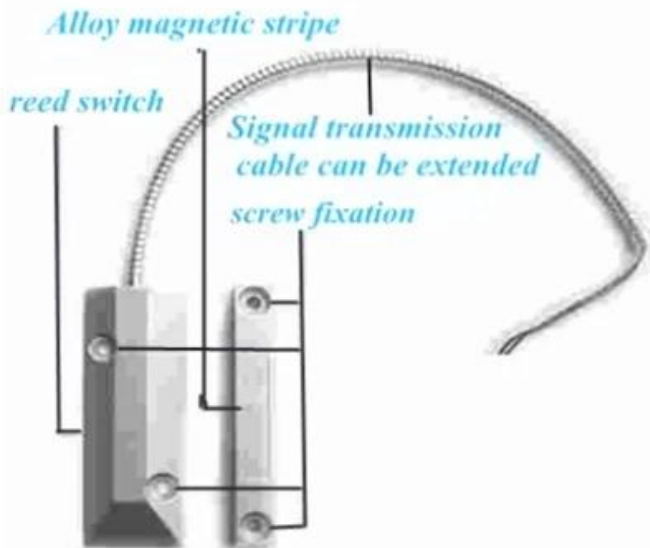

• **Packaging & shipping**

SMQT

□□□□□□ □□□□□□ □□□□□	
□□□□□ □□□	
□□□□□□	50 □□□□□□ □□ □□□□ □□□□□□ □□□□
□□□□□□ □□□□□ □□□	38 * 30 * 30 (□□)
□□□	10 ~ 17KG



● Office show

SMQT®



● Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair