


4 dây khói detector cho hệ thống báo cháy với ngõ ra NO NC có thể điều chỉnh



NHỮNG GÌ EB-117B NHÌN NHƯ THẾ NÀO?

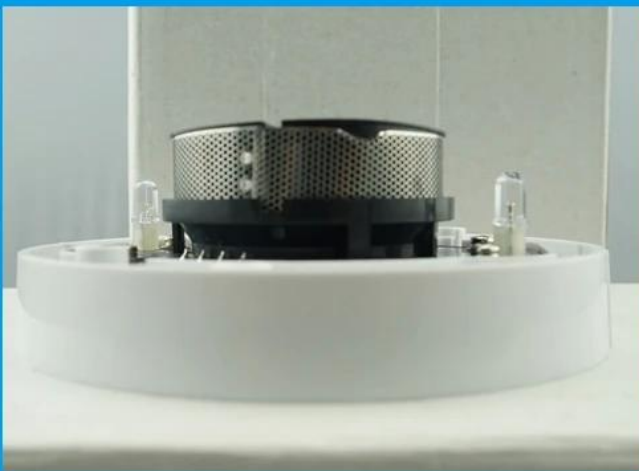

LÀM THẾ NÀO VỀ gói tiêu chuẩn EB-117B'S?



BÊN THAM GIA CHÍNH CỦA EB-117B

Sản phẩm Tên:	Đầu báo khói 4 dây cho báo cháy hệ thống với NO NC đầu ra có thể điều chỉnh
Số mô hình:	EB-117B
Quyền lực cung cấp:	DC 9 ~ 35V
Dây điện Hải cảng:	4 cổng (Công suất đầu vào +, công suất đầu vào-, ngõ ra Relay (COM), Ngõ ra Relay (NO hoặc NC))
Kích thước:	100 đường kính * 60 (mm)
Phát hiện khu vực:	20 hình vuông đồng hồ đo
Chỉ báo báo động	Đèn LED màu đỏ bật sáng
Phù hợp với:	Hệ thống báo cháy
Cách cài đặt:	Trần gắn
Nhiệt độ làm việc:	-10 Độ Celsius ~ +50 độ C
Độ ẩm làm việc:	0 ~ 90% RH (không ngưng tụ)
Cân nặng:	0,18kg
LED:	2 đèn LED
Vật chất:	Vỏ ABS + PCB bảng
Màu sắc nhà ở:	trắng
Sự bảo đảm:	bảo hành 2 năm
OEM:	Chào mừng OEM

TÍNH NĂNG EB-117B CÓ GÌ?



1.4 wire fire alarm system photoelectric smoke detector

2.Working power 9~35V DC

3.Standby current :2 mA(24V NO), 13mA(24V NC)

4.Alarm current:18 mA(24V NO),6 mA(24V NC)

5.Alarm indication:Red LED on

6.Wire port: POWER+(In)/POWER-/ COM/

7.Suitable for fire alarm panel system


8.Conformed EN54-7/UL268 standard

9.2 years warranty , welcome OEM

LÀM THẾ NÀO ĐỂ EB-117B LÀM VIỆC?



4 wire detectors wiring diagram

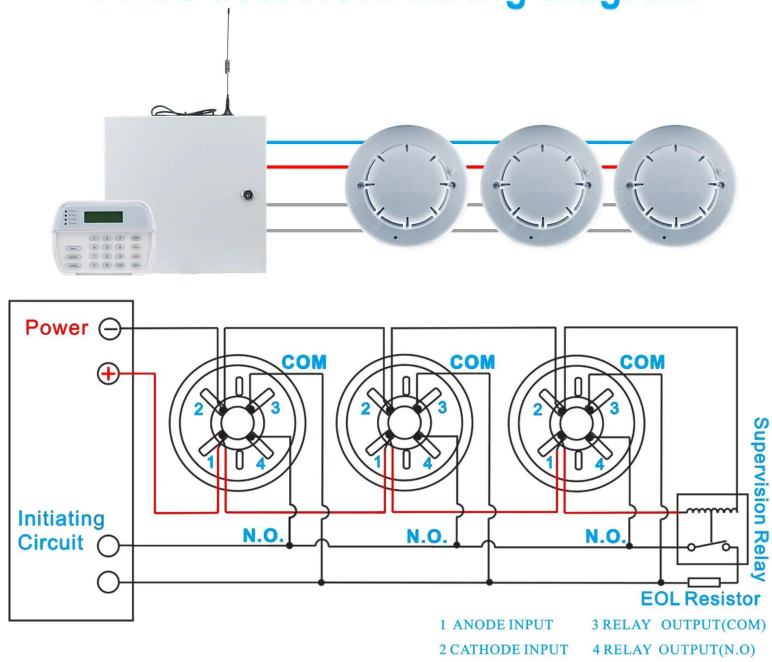

PCB board display



Where to installation?



Mall



Library



Bank

CÁCH LỰA CHỌN KHÁC?

