

# Converter RS232/485 to TCP/IP

Interface :Ethernet(10BASE-T),RS232/485 with 6 wiring terminals

Format:TCP/UDP/IP/ICMP,Ethernet,ARP

300bps-115200bps transmission speed

DC 4.5-5.5V working voltage

Serial converter is TCP/IP protocol of two-way conversion transmission equipment,changing the traditional serial port communication to network communication, to achieve fast serial device networking .



## Parameter



轉換器 型號	TCP / IP 轉換 RS485 / RS422 轉換器
型號	EA-06
尺寸	92L * 63W * 23H (mm)
工作電壓	DC4.5V ~ 5.5V
通訊協議	TCP / UDP / IP / ICMP 轉換 ARP
通訊速率	10) 10BASE-T) RS232 / 485 轉換器 轉換器
通訊埠	轉換器 轉換器 TXD RXD 轉換器
通訊埠	轉換器 轉換器 轉換器 轉換器
通訊速率	300BPS ~ 115200bps
電壓	3500VRMS
電壓	轉換器 轉換器
電壓	轉換器 轉換器
電壓	5Ω ~ 95Ω
電壓	0 °C ~ 50 °C

## Introduction



本轉換器 轉換器 轉換器 RS485 / RS422 轉換器 TCP / IP 轉換器 轉換器 轉換器 轉換器 轉換器.





*Converter RS232/485 to TCP/IP*

*Dimension:96×63×23(mm)*


*Transmission speed:300bps-115200bps*

*Format:TCP/UDP/IP/ICMP/Etjernet/ARP*

*Interface:Ethernet(10Base-T),RS232/485*

*with 6 wiring terminals*

*Welcome OEM and 2 years quality warranty*

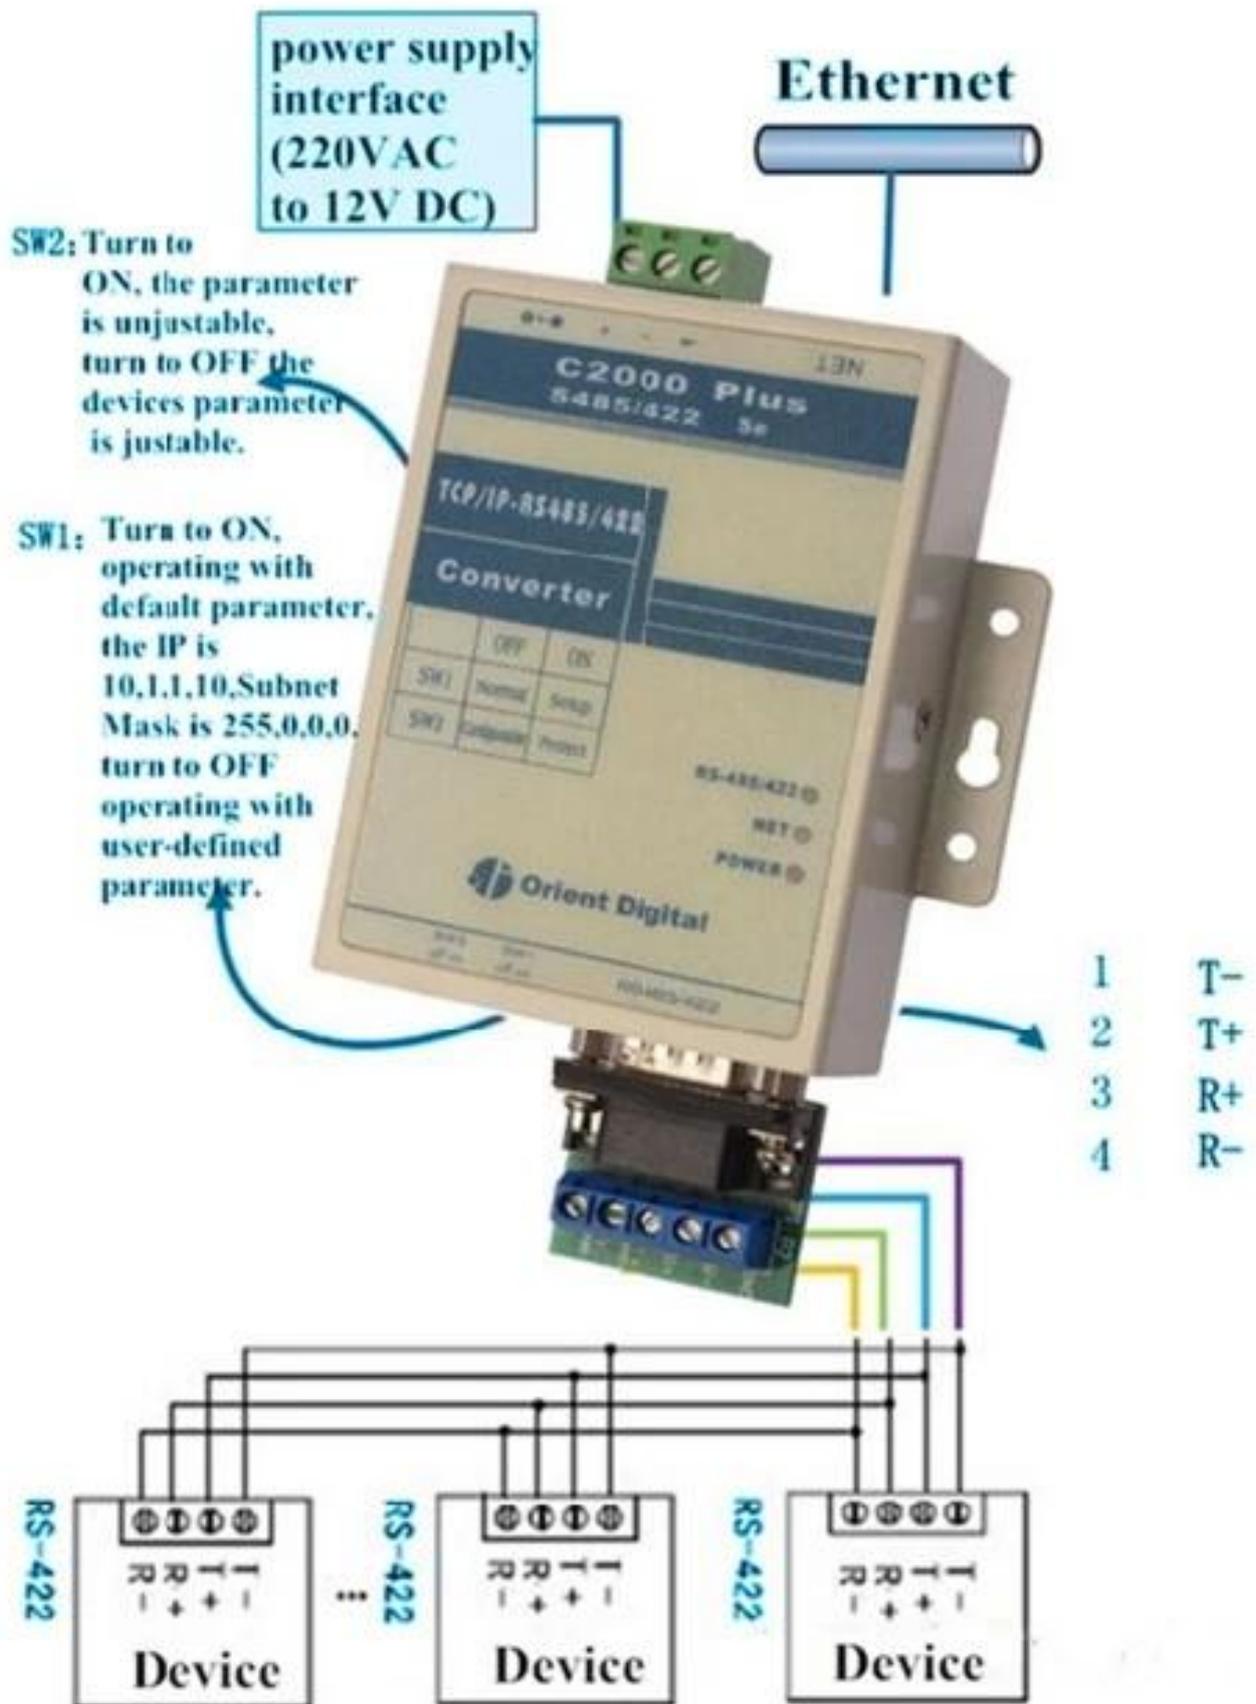



● *Office show*

SMQT®



● *Exhibition*

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair