


**Đầu dò khói quang điện 9 ~ 35V DC 4 dây phù hợp với tiêu chuẩn EN54
UL cho hệ thống báo cháy**



NHỮNG GÌ EB-117D XEM NHƯ THẾ NÀO?

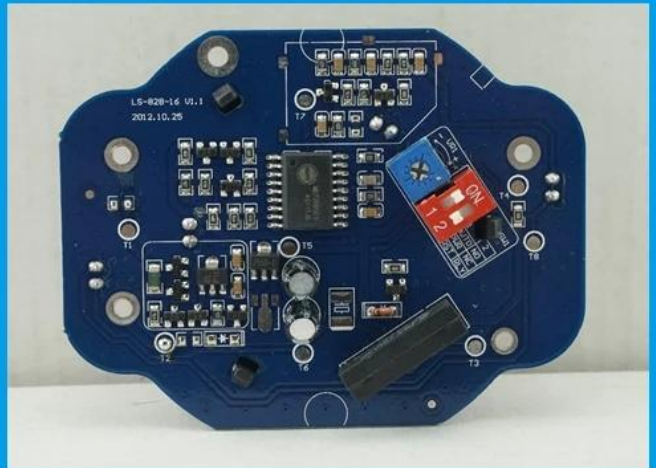

TIÊU CHUẨN CHÍNH CỦA EB-117D

Tên sản phẩm:	Đầu dò khói quang điện 9 ~ 35V DC 4 dây phù hợp với tiêu chuẩn EN54 UL cho hệ thống báo cháy
Số mô hình:	EB-117D
Cung cấp năng lượng:	DC 9 ~ 35V
Cổng dây:	4 cổng (Công suất đầu vào +, công suất đầu vào-, ngõ ra Relay (COM), ngõ ra Relay (NO hoặc NC))
Kích thước:	103diameter * 53 (mm)
Phát hiện khu vực:	20 mét vuông
Chỉ báo báo động	Đèn LED màu đỏ bật sáng
Phù hợp với:	Hệ thống báo cháy
Cách cài đặt:	Trần gắn
Nhiệt độ làm việc:	-10 Độ C ~ ~ 50 độ C
Độ ẩm làm việc:	0 ~ 90% RH (không ngưng tụ)
Cân nặng:	0,218kg
LED:	2 đèn LED
Tamper:	Vâng
Vật chất:	ABS nhà ở + PCB board
Màu sắc nhà ở:	trắng
Sự bảo đảm:	bảo hành 2 năm
OEM:	Chào mừng OEM

Những tính năng gì EB-117D CÓ?



1.9~35V DC 4 wire fire alarm system photoelectric smoke detector

2.Working power DC 9~35V

3.Standby current 2mA(24V NO),13mA(24V NC)

4.Alarm current 18mA(24V NO), 6mA(24V NC)

5.Alarm indication:Red LED on

6.Wire port: POWER+(In)/POWER-/COM/NC(NO)

7.Suitable for fire alarm system



8.Conformed with EN54-7/UL268 standard

9.2 years warranty , welcome OEM

LÀM THẾ NÀO EB-117D LÀM VIỆC?



4 wire detectors wiring diagram

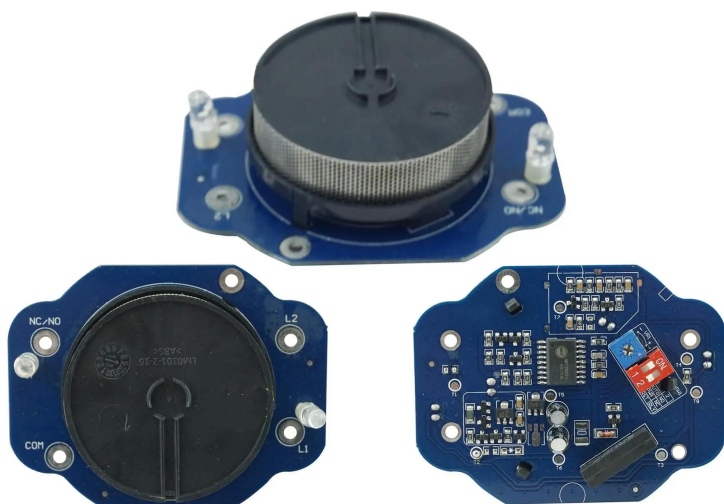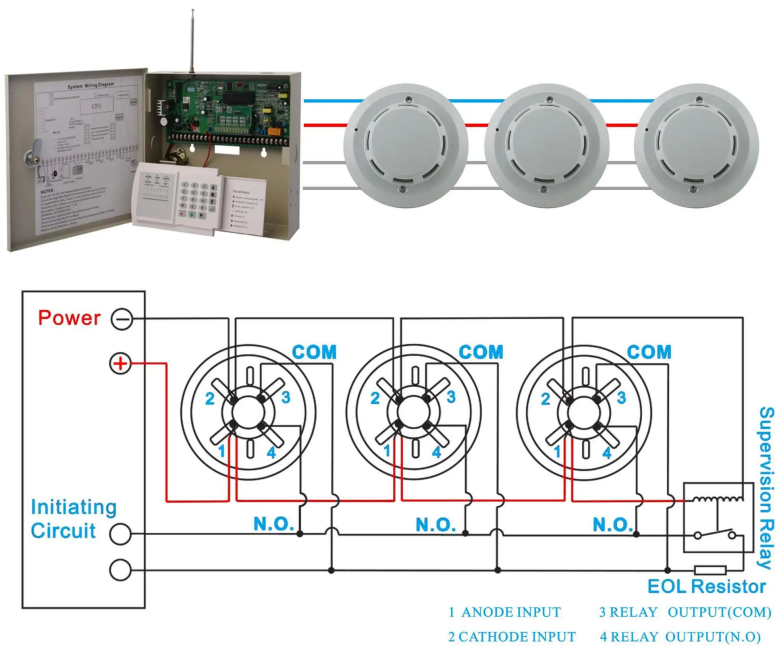

PCB Board

Where to installation?



Mall



Library



Bank

CÁCH LỰA CHỌN KHÁC?

