## □□□□□□NO NC□□□□4□□□

## EB-117B□□□□□□□

DO NOT PAINT

DO NOT PAINT

4-Wire photoelectric smoke detector
MADE IN CHINA

4-Wire photoelectric smoke detector
MADE IN CHINA

Q.C.
PASSED
COM
L1

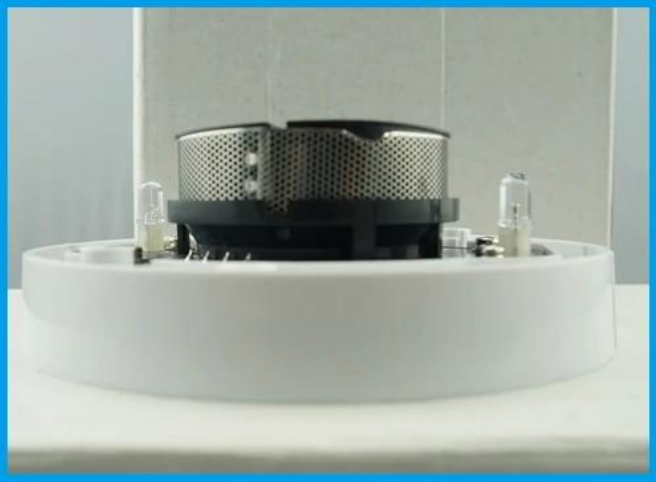

Q.C.
PASSED
L2
L1
NC/NO
COM

## EB-117B □□□□□□□□□□□□

## EB-117B□□□□□

| | |
|---|---|
| □□ □□□ | □□□□□□NO NC□□□□4□□□ |
| □□□ | EB-117B |
| □□ □□□ | DC 9~35V |
| □□□□ | **4□□□□□□□+□□□□□ - □□□□□□□COM□□ □□□□□□NO□NC□** |
| □□□ | 100□□* 60□mm□ |
| □□□□□ | **20□□□** |
| □□□□ | □□LED□□ |
| □□□ | □□□□□□□□ |
| □□□□□ | □□□□ |
| □□□□□ | -10 □□□□ **+50□□□** |
| □□□□□ | □□□□0~90□□□□□□ |
| □□□ | 0.18□□ |
| **LED□** | 2□LED□ |
| □□□ | ABS□□+ PCB □ |
| □□□□□ | □□ |
| □□□ | 2□□□ |
| **OEM□** | □□OEM |

## EB-117B □□□□□□

1.4 wire fire alarm system photoelectric smoke detector

**2.Working power 9~35V DC**

3.Standby current :2 mA(24V NO), 13mA(24V NC)

4.Alarm current:18 mA(24V NO),6 mA(24V NC)

5.Alarm indication:Red LED on

6.Wire port: POWER+(In)/POWER-/ COM/

**7.Suitable for fire alarm panel system**

**8.Conformed EN54-7/UL268 standard**

**9.2 years warranty , welcome OEM**

# EB-117B □□□□□

## 4 wire detectors wiring diagram

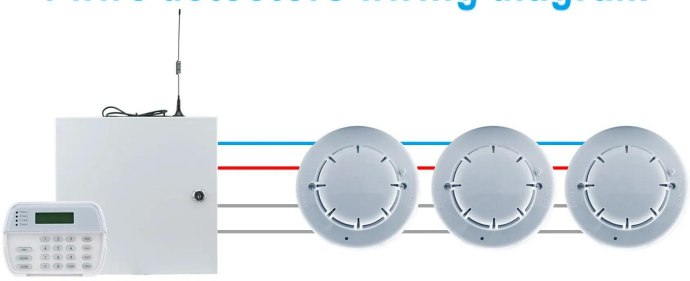

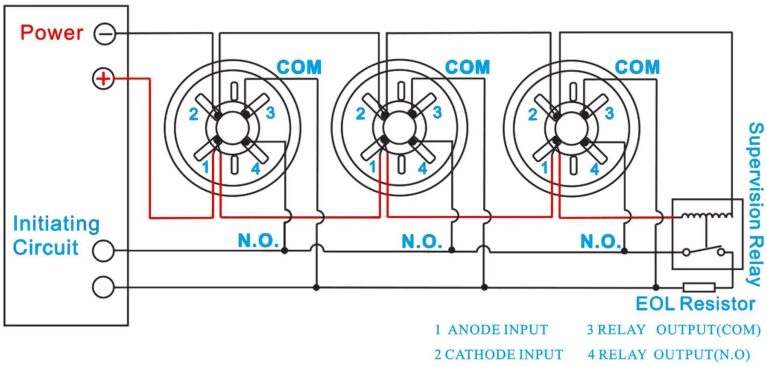


## PCB board display

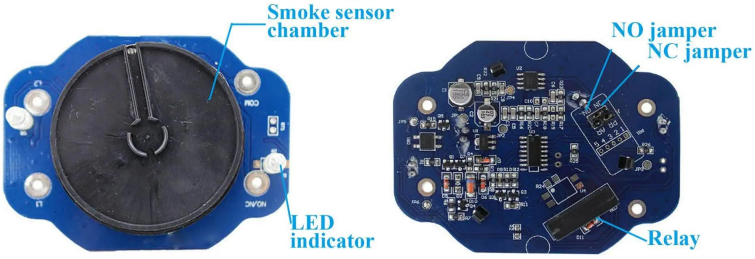


## Where to installation?

Mall

Library

Bank

# □□□□□

SMQT
铭汗科技
SMQT
铭汗科技
SMQT
铭汗科技
SMQT
铭汗科技
SMQT
铭汗科技
SMQT
铭汗科技