

Wired magnetic contact sensor

NC/NO code mode optional

20±5(mm) gap distance

MAX voltage≤100V DC,MAX current≤500mA

Suitable for wooden door or window

Fireproof ABS material shell

White/Brown color optional

8g weight



• Parameter

SMQT

□□	
□□□□	□□□□□□□□
□□	EB-135
□□	Φ10×18.5□mm□
□□	NO / NC□□□□
□□	20±5□mm□
□□□□	≤100VDC
□□□□	≤500mA
□□	≤10W
□□	□□/□□□□□□
□□	□□□□□□
□□	□□ABS□□
□□□□	-10°C□50°C
□□	8g

• In-kind shooting

SMQT



• *Feature*

SMQT



Door Magnetic Contact safe door happy life




(Notice: need match the home alarm system to



Sash window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.

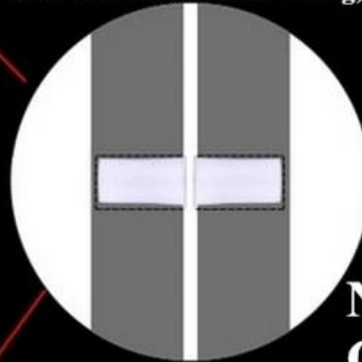

Notice:
Gap < 2cm



Sliding window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.

2 Color optional



• Packaging & shipping

SMQT®

□□□□	
□□□□	□□□□□□□□ EB-135
□□	□□□□2000□
□□□□	38 * 30 * 30□cm□
□□	21kg



• Office show

SMQT®



2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....