

Converter RS232 to RS485

Compatible with EIA/TIA RS-232,RS-485 standard

Interface:RS232 interface DB9(holes)

RS485 interface DB9(pin)


Transmission medium:normal cables

twisted-pair cables or shield cables

300 to 115-21BDS transmission speed

Working environment :-10 to 80 °C

Working humidity:5% to 95%

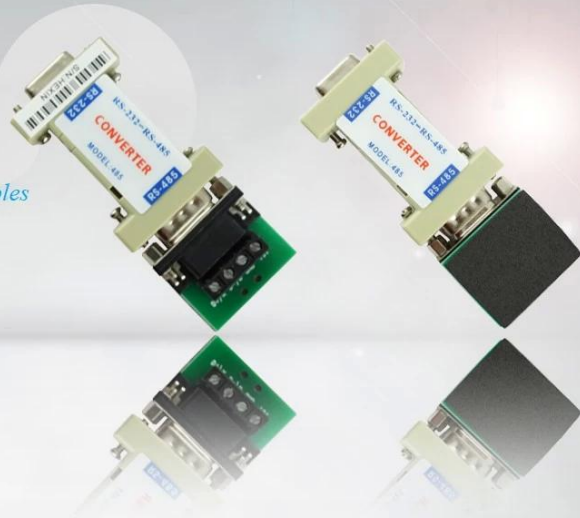


Parameter




□□	RS232 □RS485□□□
□□□□	EA-01
□□	90×33×12□mm□
□□□□	□□□□ □EIA / TIA RS-232C□RS-485□□
□□□□	S-232C□□DB9 □□□□□□□□RS-485□□□□□□□□DBP□□□□□□□□ □□□□□□□□
□□□□	□□ □□□
□□□□	□□□□□□ □□□□□□□
□□□□	300-115200BPS
□□□□	5 m□RS-232□□□1200 m □RS-485□□□□
□□	RS-232□TXD□RXD□RTS□CTS□DTR□ DSR□DCD□GND RS-485□□□+□□□□ - □GND
□□	□□□□□□□ □□□□□□□□□□□□□□□□□TD□RD□GND□ □□□□□
□□	□□
□□	□□□□□
□□□□	5□□95□
□□□□	-10°C□85°C
□□□	□□
□□	0.106kg

In-kind shooting



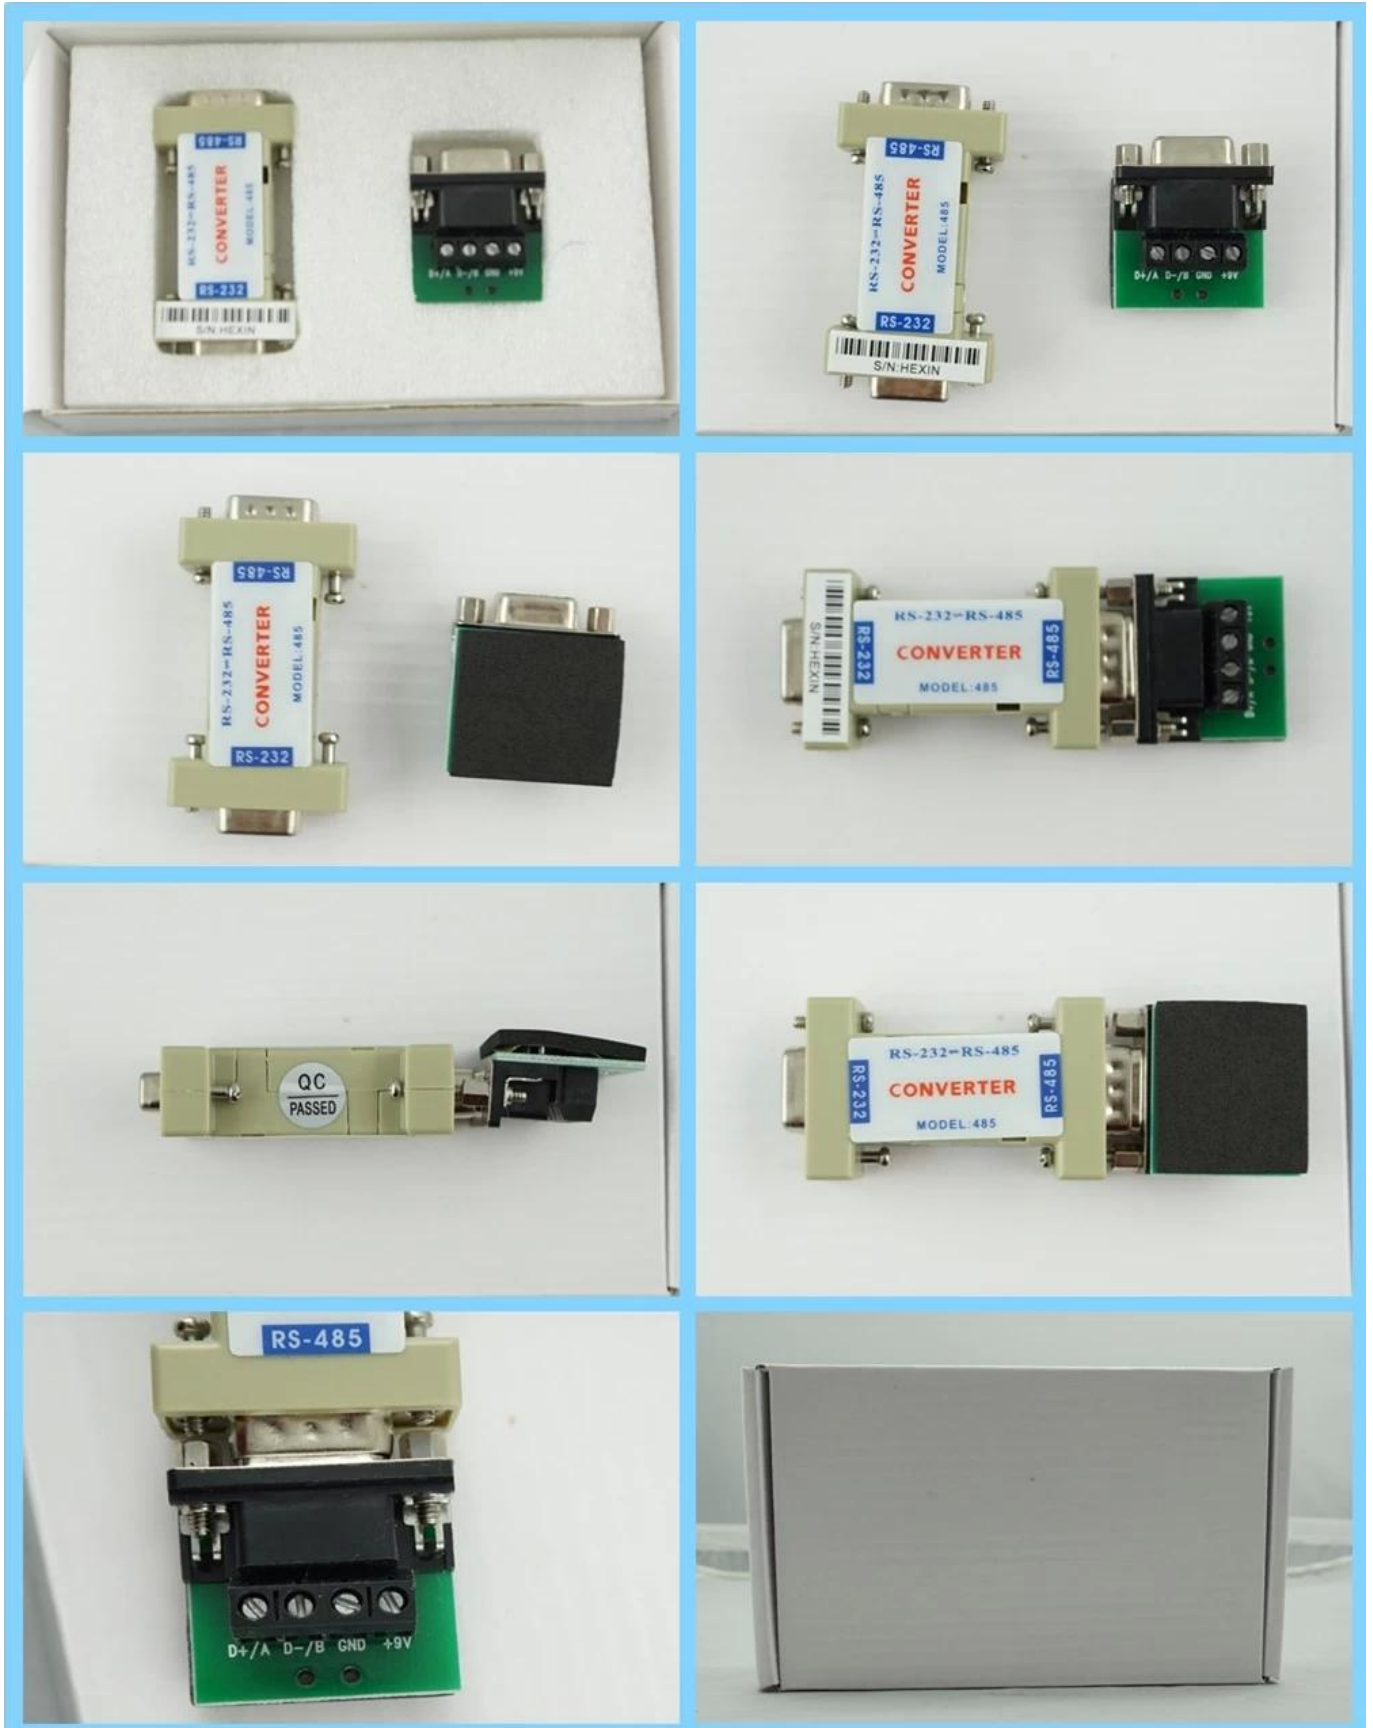

• *Feature*

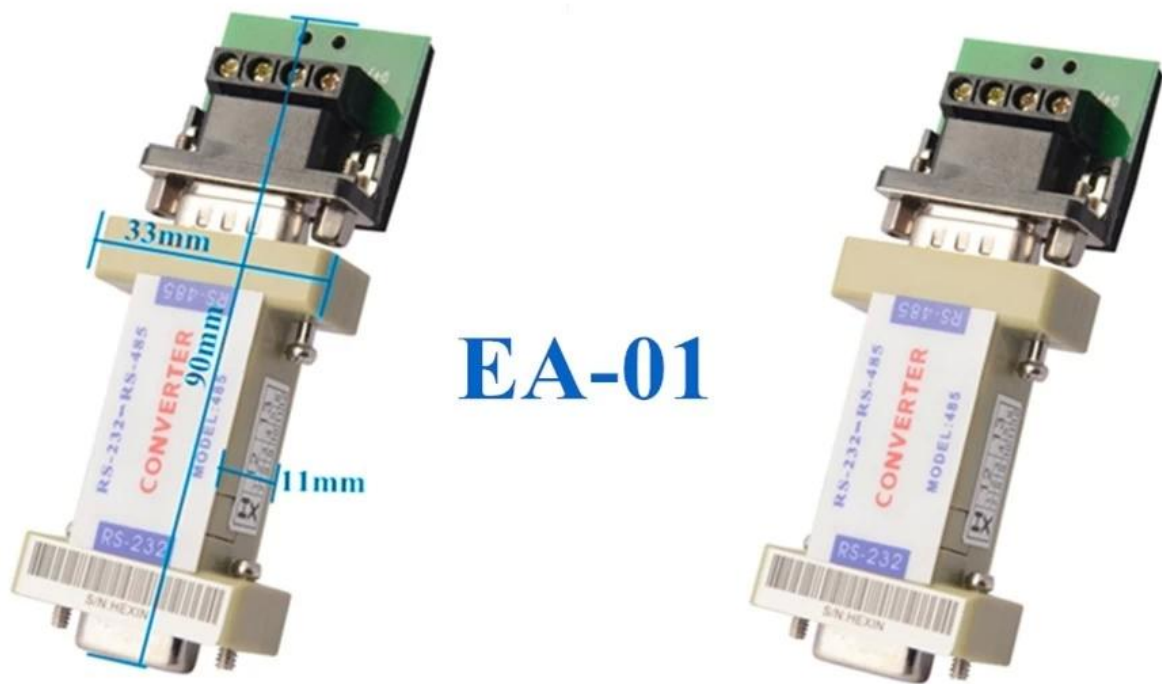

EA-01

Converter RS232 to RS485

Dimension:90×33×12(mm)

*Interface compatible with EIA /
TIA RS-232C, RS-485 standard*

RS-232 terminal DB9 female connector port

RS-485 terminal DBP pin connector port

*RS-232: TXD, RXD, RTS, CTS, DTR, DSR,
DCD, GND*

RS-485: Data +, Data-, GND, 9V+

Relative Humidity:5%~95%

Environment temprature:-10 °C~85 °C

Welcome OEM, 2 years quality warranty

Application

SMQT

Switch Power Supply



Door release button



Standalone controller

Converter
(RS232 to RS485)
EA-01



PC

Packaging & shipping

SMQT

	□□□□
□□□□	□□□RS232□RS485 EA-01
□□	100pcs /□
□□□□	53 * 40 * 37□cm□
□□	10kg



Office show

SMQT®



Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....