


Converter RS232 to RS485

Compatible with RS-232, RS-485/RS-422 standard of EIA/TIA
 RS-232 interface, DB9(holes)
 RS-422/RS-485 interface, DB9(pin) with 6 terminals
 300-115.2kbps transmission speed
 Twisted-pair cables as transmission medium
 With protection of $\pm 15\text{KVESD}$, RS-422/RS-485 of 600W lightning
 strike and surge power of each line.
 3500VRMS isolation
 500VDC isolation voltage



Parameter

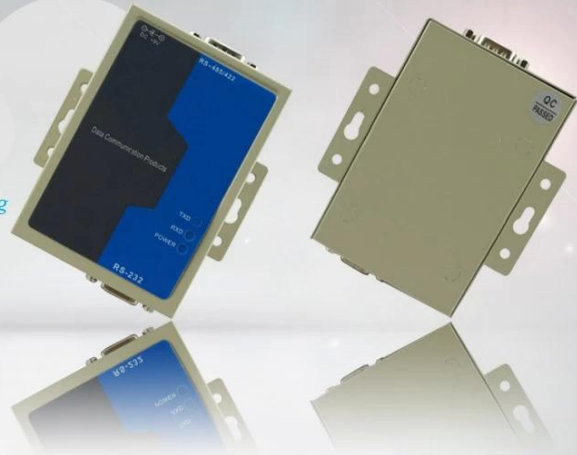

Model	RS232 to RS485 EA-05
Part Number	EA-05
Dimensions	90L * 65W * 25.5H mm
Power Supply	DC 9V
Interface Standard	EIA / TIA RS-232C to RS-485 / RS-422
RS-232C Interface	DB9 (pin) RS-422 / RS-485 DB9 (holes)
RS-422/RS-485 Interface	TXD RXD
Transmission Speed	300-115.2KBPS
Protection	RS-232 $\pm 15\text{KVESD}$ RS-422 / RS-485 600W
Isolation	3500VRMS
Isolation Voltage	500VDC
Temperature Range	0°C to 50°C
Weight	0.62kg

In-kind shooting





• Feature

SMQT®

EA-05



Converter RS232 to RS485

Interface compatible with EIA / TIA RS-232C,
RS-485 / RS-422 standard

Electrical Interface:

RS-232C interface DB9 female connector port,
RS-422/485 Interface DB9 female connector

Transmission medium: shielded twisted pair wire

300-115.2KBPS transmission rate

Lightning surge protection

Working Humidity: 5%~95%


Environment temperature: 0 °C ~ 50 °C

Net weight: 0.62kg

Welcome OEM and 2 years quality warranty

Application

SMQT

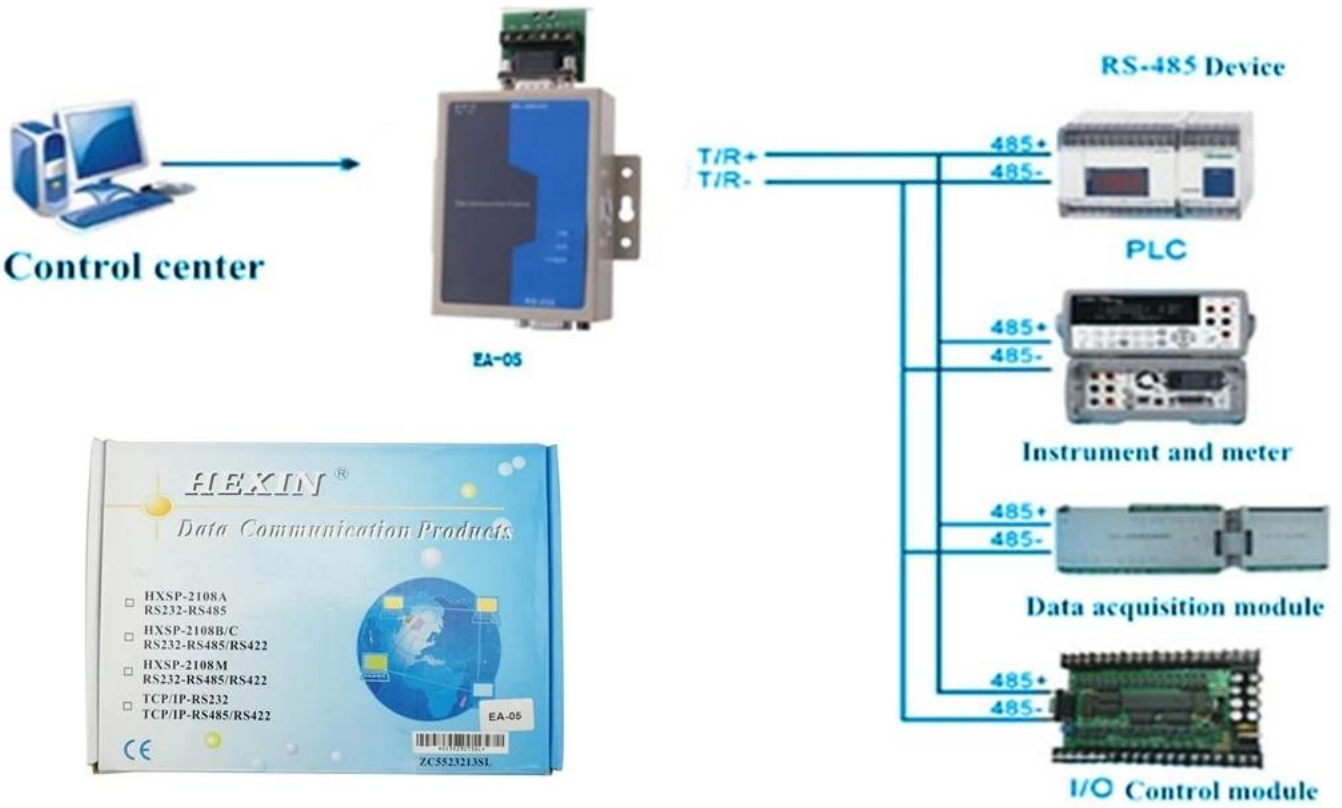

Packaging & shipping

SMQT

	□□□□
□□□□	□□□□□RS232□RS485 EA-05
□□	□□20□
□□□□	43 * 30 * 37□cm□
□□	14kg



WE LOGISTICS



• Office show

SMQT



• Exhibition

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....