

● Parameter

SMQT

	□□
□□□□	□□□□□□□□
□□□□	EB-130A
□□	23A□12V□□
□□□□	≤10UA
□□□□	≤25MA
□□□□	□□10°C□50°C□□□□≤97□
□□□□	□□□□100 m
□□□□	65 * 38 * 20□□□□
□□□□	□□□
□□□□	ABS

● Introduction


SMQT

- 1□□□□□□□□□□□□□□□□□□
- 2□□□□□□□□□□
- 3□□□□□□□□□□□□□□□□□□
- 4□□□□□□□□□□□□□□□□□□
- 5□□□□□□□□□□□□



● Dimesion Picture

SMQT

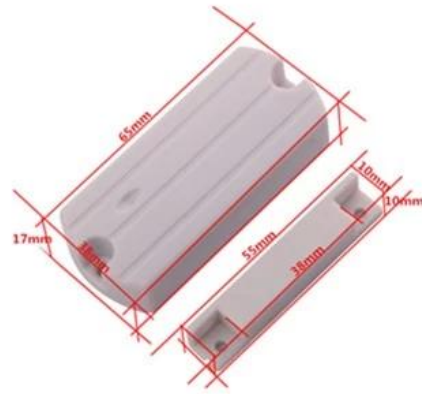

● Installations



▲ *Installation*

Selected installation area ondoor or window, then fixtured it with screws.

Note:The gap must<45mm.

The working environment should be dry and clean.

● Packing list



	□□□□	
□□□□		□□□□□□□□
□□		200□/□
□□□□		40 * 30 * 20□□□□
□□		10□□



● Office

SMQT®



● Exhibitions

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair