

● Parameter

SMQT

□□	□□□□□□□□□□
□□	EB-183
□□□	Φ106x36□□□□
□□□□□	DC12V
□□□□□□□	18□□
□□□□□	Φ8m
□□□□□	360°
□□□□□	NO / NC
□□□□□	□□□□□□□
□□□□□□□	2.2□-3.6□
□□□	□□ABS□□
LED□	ON / OFF□□□□

● Introduction

SMQT

1 □ 12v □ □ □ □ □ □ □ □ □ □ EB-183

2 □ □ □ □ 107 * 59 * 40 mm

3 □ □ □ □ □ □ ABS □ □



4 □ PIR □ □ □

5 □ OEM

6 □ □ □ GSM □ □ □ □ □ □ □ □ □ □


□ □ PIR □ □ □ □ □ □ 12V □ □ □ □ □ □ □ □ □ □ □ □ □ □

Detecting Area View

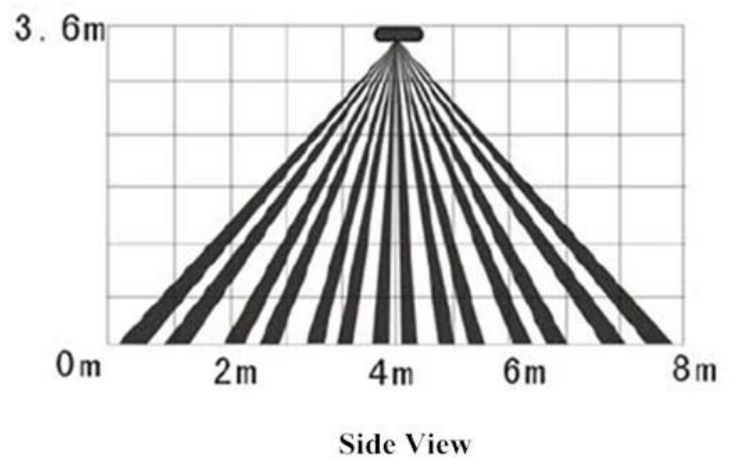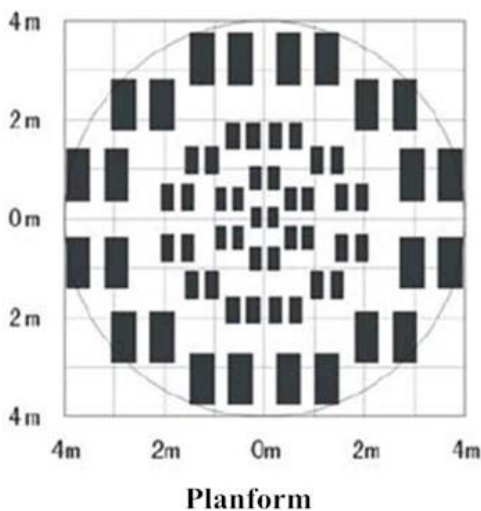

● Dimesion Picture

SMQT

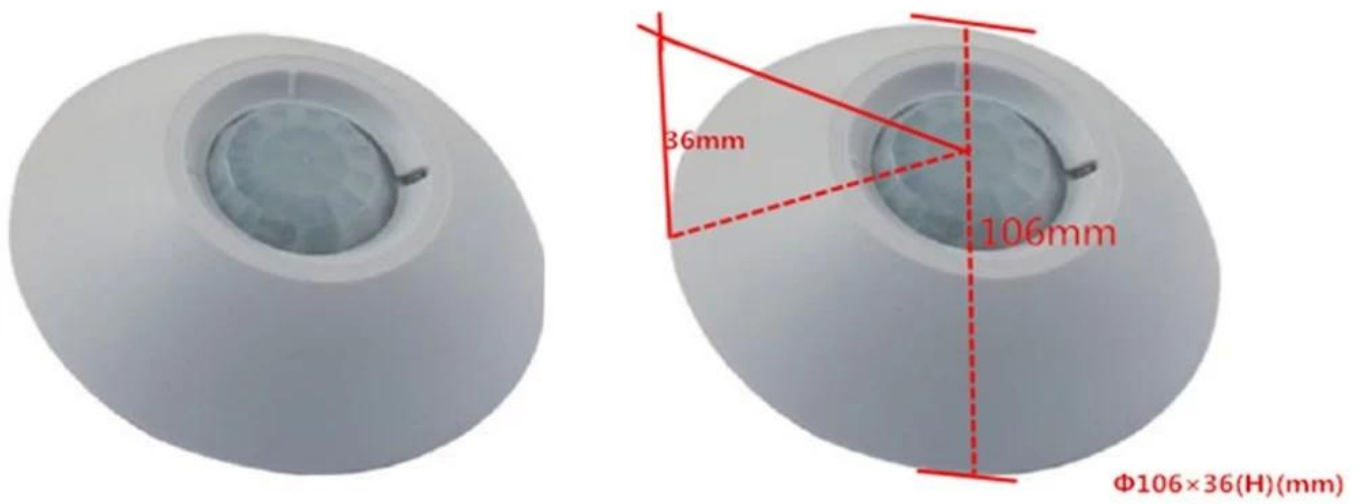


● Installations

SMQT



inside picture of detector

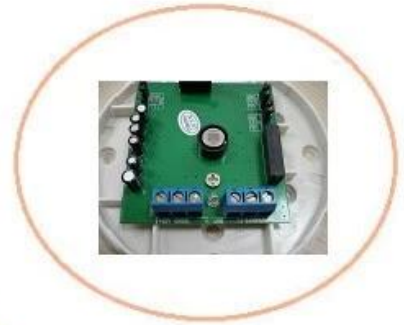

wired connect PCB



Tamper on PCB



ceiling mounted sensor

● Office



● Exhibitions



2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair