

• Parameter

SMQT®

	EA-22A	EA-22B
□□□□	□□□□□□□□	□□□□□□□□
□□□□	□□□□□□□□3A36VDC	□□□□□□□□3A36VDC
□□□□□□	500,000□□□□□□	500,000□□□□□□
□□	□□□□□□□□□□□□	□□□□□□□□□□□□
□□	-10□+ 55°C	-10□+ 55°C
□□□□	0□95□□□□□□□□	0□95□□□□□□□□
□□□□	□□□□	□□□□

• Introduction

SMQT®



EA-22A



EA-22B



EA-22A



EA-22B

Advantages


Aluminum panel with the sand blast treatment

Pure copper plating nickel button

500,000 times mechanical test



Switch power supply

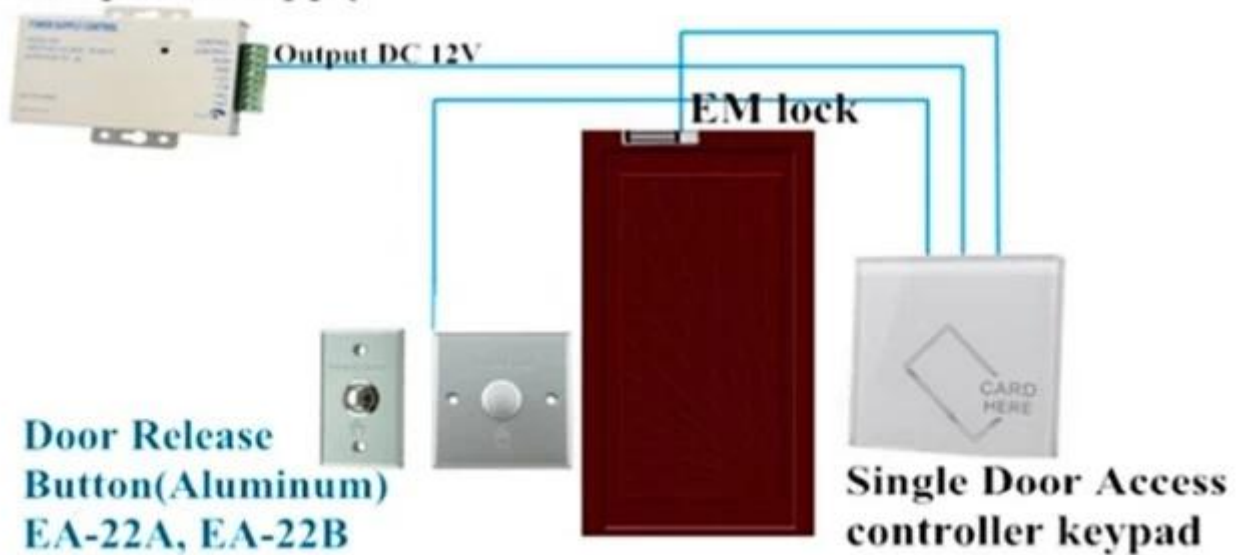

• *Dimension*



• Packaging & shipping

SMQT





● *Office show*

SMQT®



● *Exhibition*

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....