

Wired embedded magnetic contact

NC/NO mode optional


35±5(mm) gap distance

Max voltage≤100VDC, Max current≤500mA

Suitable for metal door or window

White/Brown color optional

24g weight

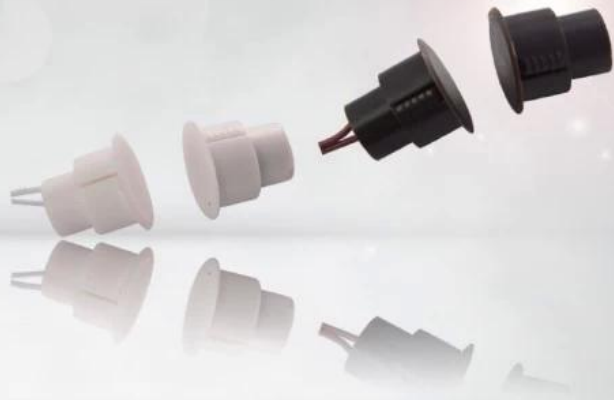

Parameter



Model	EB-136
Dimensions	Φ19* 25mm
Material	ABS
Gap distance	35±5mm
Max voltage	≤100VDC
Max current	≤500mA
Max power	≤10W
Application	ABS
Material	ABS
Weight	24g

Introduction



Placeholder for introduction text.

PRODUCT PICTURE



PRODUCT FEATURE



EB-136



Dimension: $\phi 19*25$ (mm)

Material: ABS

Max Gap: ≤ 40 mm

Install way: Drill hole install

Wire : 22# wire 40cm

Power : 0.5A 10W

Fire-proofing materials

Adopt ABS flame retardant material, fire retardant safer, connecting with 22 # wire, total length of 30 cm. Suitable for metal doors and cabinet door, etc.



Waterproof seal

Using imported PC glue sealing, close the magnet and wiring, waterproof, and durable leakage, using more safe and more comfortable



Strong magnetism

Magnetic strength, which can be installed directly drilling, stable performance.







● Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....