

Converter RS232/485 to TCP/IP

Interface :Ethernet(10BASE-T),RS232/485 with 6 wiring terminals

Format:TCP/UDP/IP/ICMP,Ethernet,ARP

300bps-115200bps transmission speed

DC 4.5-5.5V working voltage

Serial converter is TCP/IP protocol of two-way conversion transmission equipment,changing the traditional serial port communication to network communication, to achieve fast serial device networking .



Parameter



□□□□	TCP / IP□RS485 / RS422□□□
□□	EA-06
□□	92L * 63W * 23H□mm□
□□□□	DC4.5V□5.5V
□□□□	TCP / UDP / IP / ICMP□□□□□ARP
□□□□	□□□□10Base-T□□□□□□□□RS232 / 485
□□□□	□□□□□TXD RXD POWER
□□□□	□□□□□
□□□□	300bps□115200bps
□□	3500VRMS
□□	□□
□□	□□□□
□□□□	5□□95□
□□□□	0°C□50°C

Introduction



□□□□□□□□□□□□□□□□□□□□RS485 / RS422□TCP / IP□□□□□





Converter RS232/485 to TCP/IP

Dimension:96×63×23(mm)


Transmission speed:300bps-115200bps

Format:TCP/UDP/IP/ICMP/Etjernet/ARP

Interface:Ethernet(10Base-T),RS232/485

with 6 wiring terminals

Welcome OEM and 2 years quality warranty

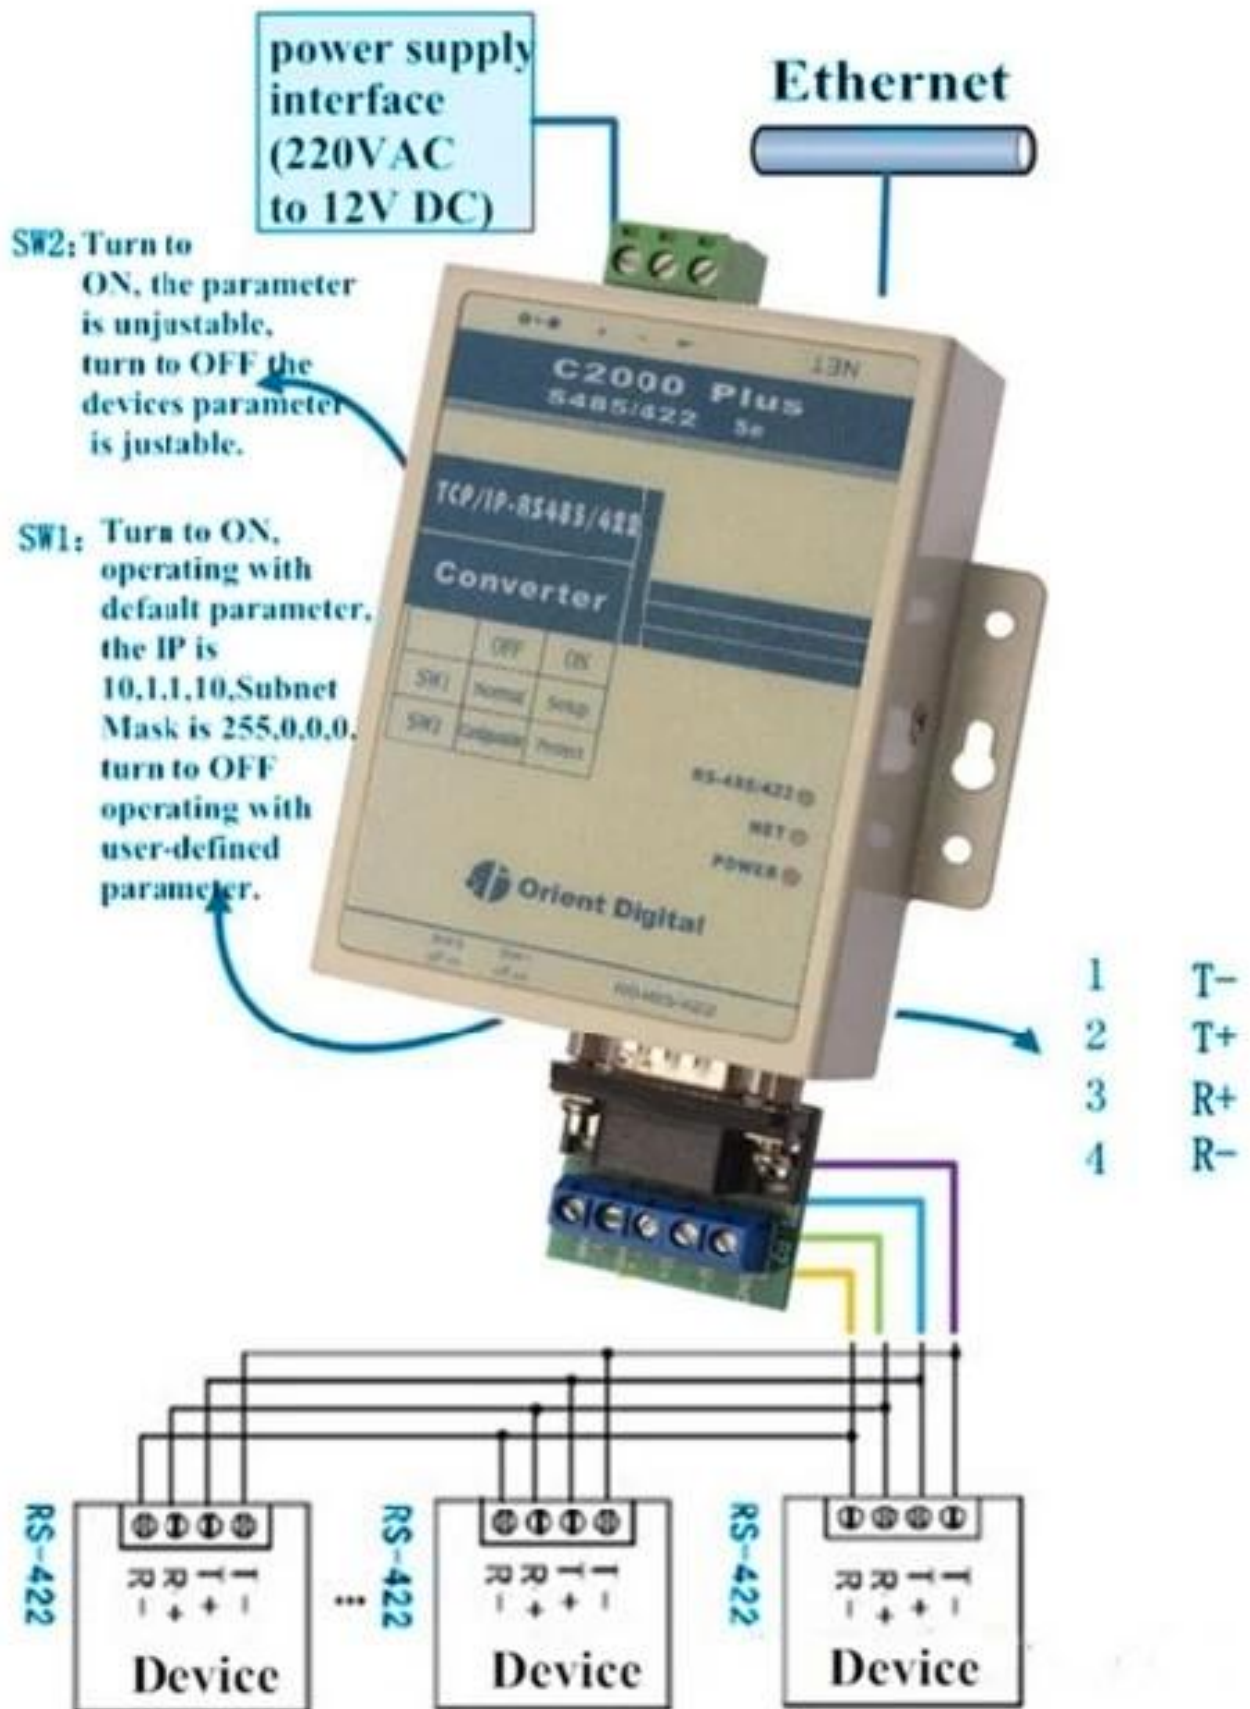



● *Office show*

SMQT®



● *Exhibition*

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair