RS485 شاشة التحكم في الوصول باب واحد لوحة المفاتيح مع اتصال شبكة OLED

WELCOME
00 02
01/01/2000 Saturday

WELCOME
00 02
01/01/2000 Saturday

Main parameter

Power supply	DC 9-15V
Power consumption	< 1 W
Card type	13.56 MHz / 125 KHz (Optional)
Read range	5-8cm
Capacity of records	10000
Number of users	10000
Communication port	RS485
Transmit Rate	9600 bps (N, 8, 1)
LED Tips	Card flashing/keypad/doorbell
Data storage	4M bits FLASH Memory
Certification	Card flashing/ Card flashing+password/ User ID+password/ Public password
Clock	Yes
Reading tips	Beeper/OLED/LED
Dimension	96×96×22(mm)
Material	PC+ABS Screen: PMMA
Environment	-30℃to+65℃

EA-82DK'S MAIN PARAMETER

اسم المنتج:	شبكة R485 شاشة التحكم في الوصول باب واحد لوحة المفاتيح مع OLED الاتصالات
رقم الموديل:	EA-82DK

طاقة كهربائية شغالة:	9 ~ 15V DC
استهلاك الطاقة:	العلامة & lt1 ؛W
بحجم:	96× 96 × 22 (ملم)
سعة المستخدم:	10000 مستخدم
نوع بطاقة RFID:	ID (125KHZ) / IC (13.56MHZ) (اختياري)
المسافة قراءة البطاقة:	3 ~ 5CM
منفذ الأسلاك:	جرس الباب ، مستشعر الباب ، WG قفل ، زر الباب ، قارئ بطاقة
لوحة المفاتيح:	زر لوحة مفاتيح مقاومة للاهتراء
الوضعية:	باب واحد نظام مراقبة الدخول
مناسب ل:	hosptial مكتب ، شقة ، مشروع نظام التحكم في الوصول
مواد:	إطار ABS + لوحة PCB + شاشة OLED (PMMA)
وزن:	240G
التعبئة والتغليف:	مربع ورق محايد والكرتون ورقة 1 جهاز كمبيوتر شخصي لكل صندوق ، 37 صناديق في الكرتون
درجة حرارة بيئة العمل:	-35 ℃ ~ 65 ℃
رطوبة العمل:	20٪ ~ 80٪
ضمان:	1 سنة الضمان
OEM:	نرحب تصنيع المعدات الأصلية

Appearance

Wiring diagram

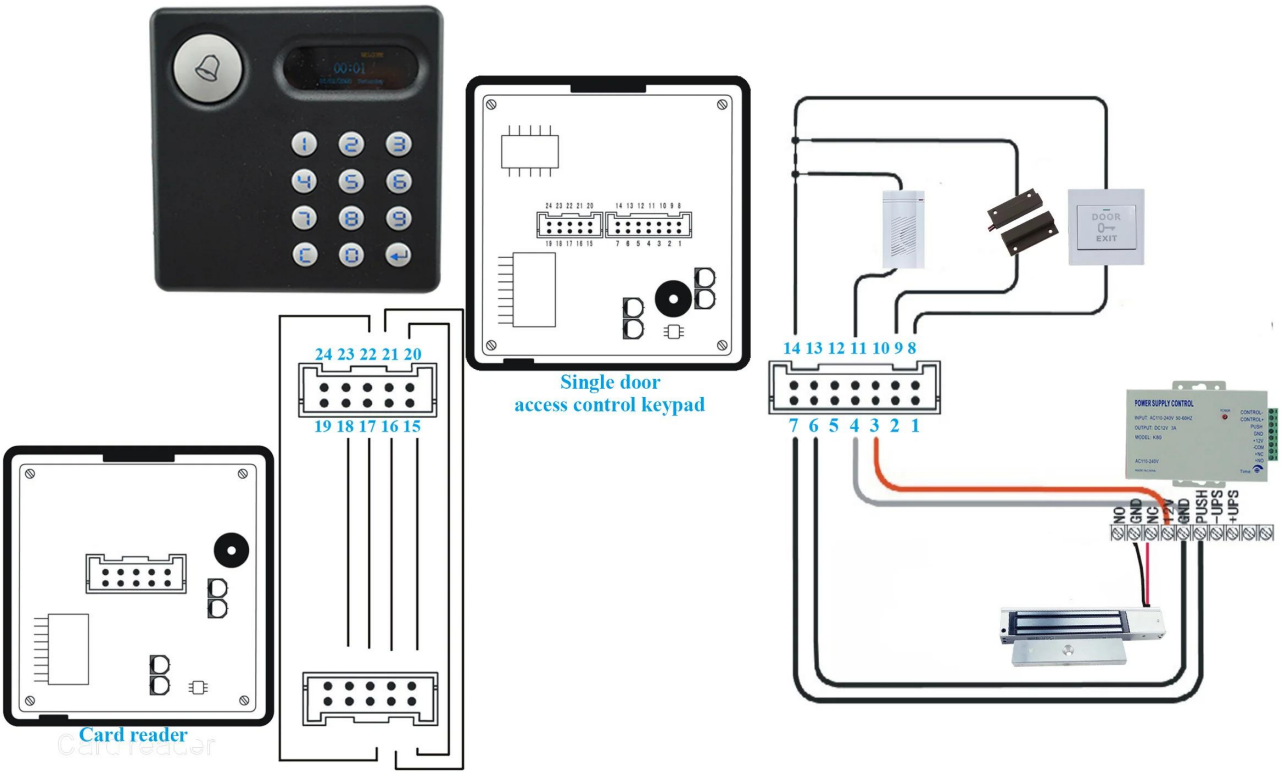

Wire port specification		
NO	Function	Description
1	RS485+	Data +
2	RS485-	Data -
3	12V＋	DC Power 12V
4	GND	GND
5	OUT-NC	Door relay NC interface
6	OUT-COM.	Door relay COM interface
7	OUT-NO.	Door relay NO interface
8*	IN 1	Input 1, door release button input
9*	IN 2	Input 2, door magnet signal input
10*	IN 3	Input 3, user-defined
11	OC OUT	Build-in doorbell signal output
12*	OUT 2	OC signal, duress output
13*	OUT 3	OC signal, anti-tamper output
14	GND	GND
15	OUT 12V+	Power output, can be connected to WG reader power +
16	GND	Power output, can be connected to WG reader power GND
17	DATA 0	WG Data 0 input, connect reader Data 0
18	DATA 1	WG Data 1 input, connect reader Data 1
19	GND	GND
20	OC1-OUT	Unregistered card output, OC signal output for 3s after card flashing to open the door, can connect Green LED end of WG reader.
21	OC2-OUT	Unregistered card output, OC signal output for 3s after card flashing but not to open the door, can connect Red LED end of WG reader.
22	OC3-OUT	Unregistered card output, OC signal output for 3 times after card flashing to open the door, each interval time is 100ms, can connect Beeper end of WG reader.
23	NULL	N/A
24	ANTI-TAMPER-IN	Anti-tamper signal input, connect anti-tamper output signal of WG reader

Installation

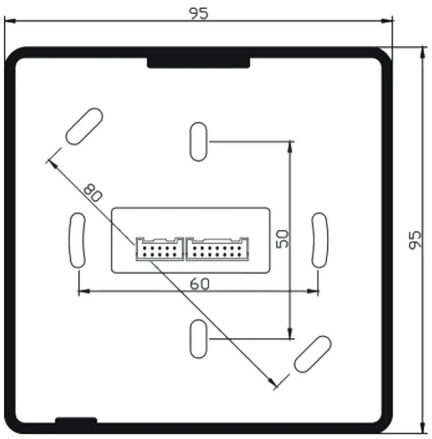

:mm

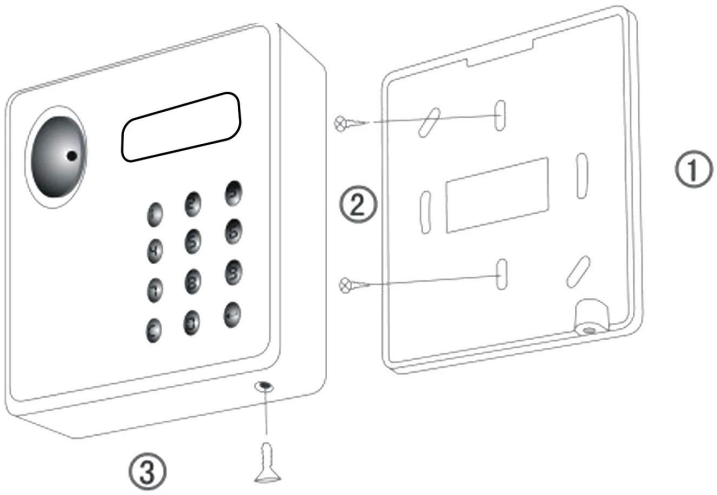

كيف حول خيار آخر؟