

WG IC/ID



EA-90Q



EA-90Q

WG	WG IC/ID
EA-90Q	EA-90Q
DC 5V12V	DC 5V12V
800	800
WG / RS485 / RS232 / USB / TCP / IP	WG / RS485 / RS232 / USB / TCP / IP
IC 13.56MHz / 125KHz	IC 13.56MHz / 125KHz
0 20	0 20
3 6	3 6
LED	
86 * 86 * 46	86 * 86 * 46
ABS + PCB	ABS + PCB
0.2	0.2
2	2
OEM	OEM

EA-90Q



1. Access control QR and RFID Reader with WG output

2. Input voltage DC 4~15V

3. Working current: 800mA

4. QR module & Rfid module

5. Recode support QR and One dimensional code

6. QR read speed <200ms, read distance 0~20cm

7. Interface: WG/RS485/RS232/USB/TCP/IP


8. Suitable for all kinds of WG door access control system

9. Rfid module IC(13.56Mhz)/ID(125KHz) optional

10. Card induction distance 3~6cm

11. 2 years warranty , welcome OEM

EA-90Q □□□□□□□□

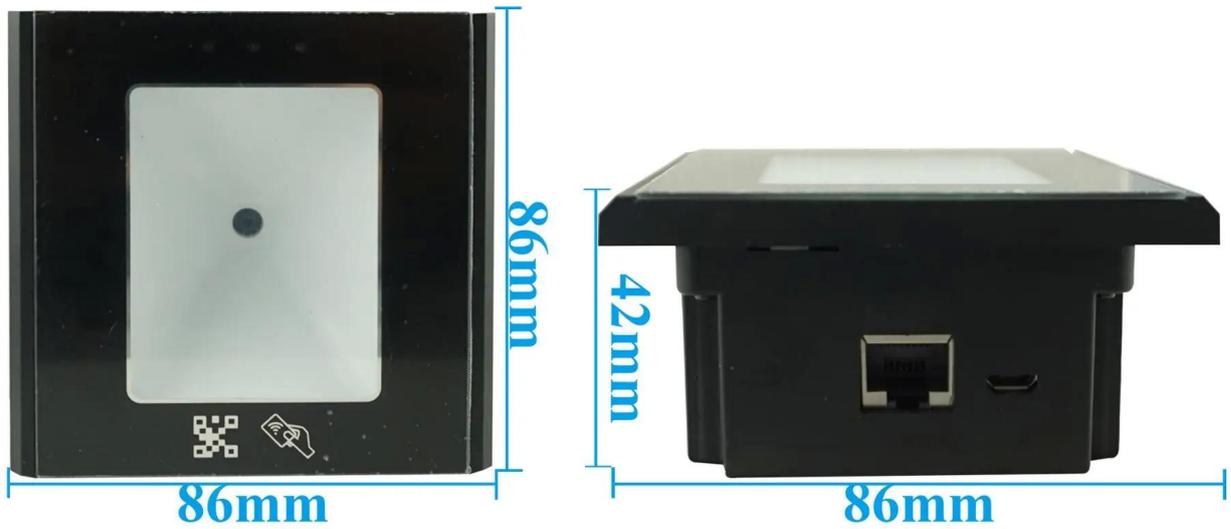

Interface introduction



VCC: DC12+;

GND: DC12-;

D0:DATA0;

D1:DATA1;

LED:light control;

BEEP:beep control ;

TX/R+:RS232+/RS485+;


RX/R-:RS232-/RS485-;

SPK-, SPK+: Temporary undefined;


RJ45: It can be used to connect network and use PC software to set parameters of reader card; it is suitable for HTTP mode communication;

micro-USB:Suitable for USB virtual keyboard and USB virtual serial communication mode;

How to use it?

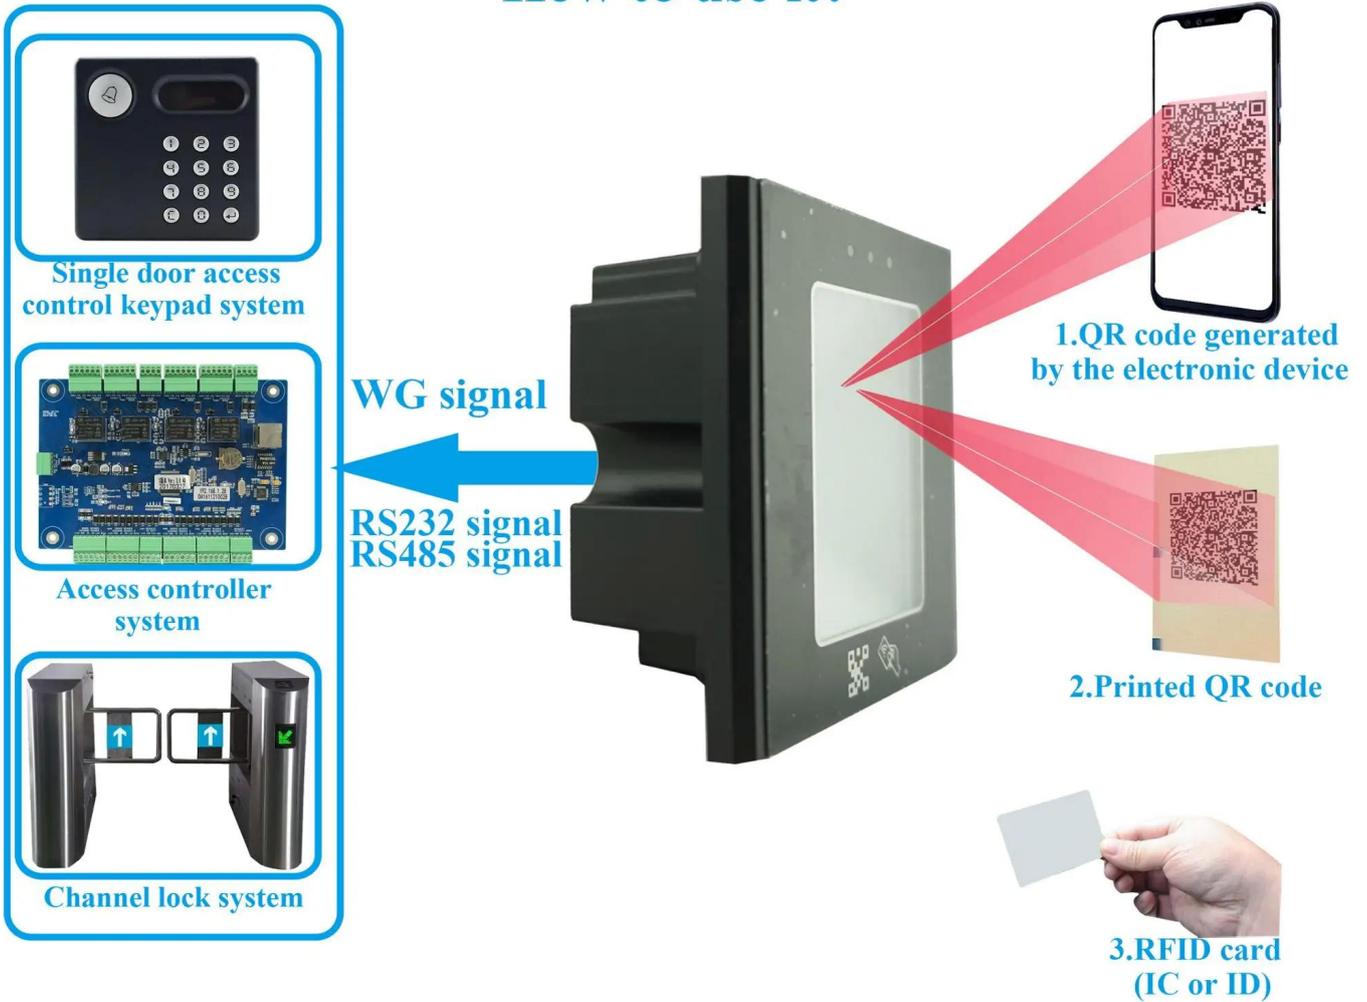

Mobile phones, screens, paper, plastics, two-dimensional, one-dimensional, color code, deformation code, fouling code accurate sweep

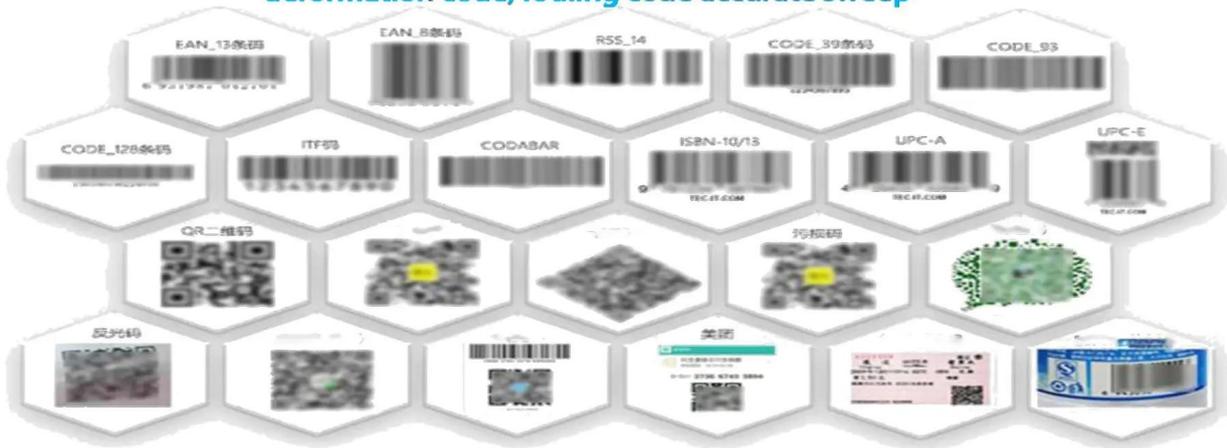

Size of read code: 8-100mm two-dimensional code



.....



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技

