

# Wired embedded magnetic contact

*NC/NO mode optional*

*35±5(mm) gap distance*


*Max voltage≤100VDC, Max current≤500mA*

*Suitable for metal door or window*

*White/Brown color optional*

*24g weight*

**SMQT®**

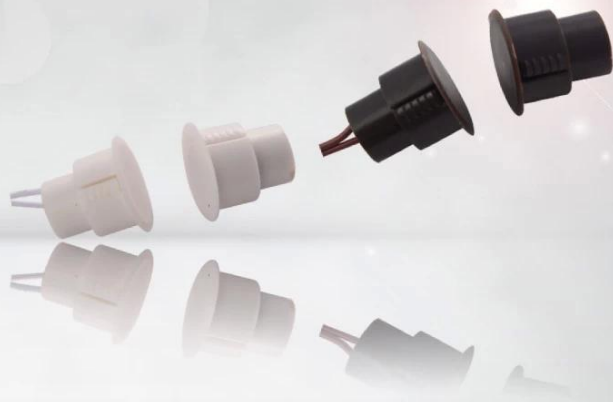

## • Parameter

**SMQT®**

<b>Parámetro</b>	
Nombre del producto	Sensor de contacto magnético emulado
Modelo	EB-136
Dimensión	Φ19 × 25 (mm)
Modo de código	NO / NC (opcional)
Brecha	35 ± 5 (mm)
Tensión máxima	≤ 100V DC
corriente maxima	≤500mA
Max rating	≤ 10W
Color	Marrón / Blanco (opcional)
Estar hecho para	Puerta o ventana metálica
Material	Carcasa anti-incendio ABS
Temperatura de trabajo	-10 °C ~ 50 °C
Peso neto	24 g

## • In-kind shooting

**SMQT®**



• *Feature*

SMQT®



## EB-136

	Dimension: $\phi 19 * 25(\text{mm})$
	Material: ABS
	Max Gap: $\leq 40\text{mm}$
	Install way: Drill hole install
	Wire : 22# wire 40cm
	Power : 0.5A 10W

### Fire-proofing materials

Adopt ABS flame retardant material, fire retardant safer, connecting with 22 # wire, total length of 30 cm. Suitable for metal doors and cabinet door, etc.



### Waterproof seal

Using imported PC glue sealing, close the magnet and wiring, waterproof, and durable leakage, using more safe and more comfortable



### Strong magnetism

Magnetic strength, which can be installed directly drilling, stable performance.



## • Packaging & shipping

SMQT®

Lista de envases	
Nombre del producto	Sensor de contacto magnético emulado EB-136
Cantidad	600 piezas por caja
Tamaño del cartón	38 * 30 * 30 (cm)
Peso	16kg



## • Office show

SMQT®



2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....