

Wired magnetic door sensor

Fireproof ABS material housing

20±5(mm) gap

Max voltage≤100V DC,Max current≤500mA

Use for wooden door or window

White/Black color optional

SMQT



• Parameter

SMQT





Dimensiones	64L * 19W * 13H (mm)
Conexión	Normalmente abierto / normalmente cerrado
Distancia de funcionamiento	20 \ pm 5 (mm)
Presión máxima	≤ 100VDC
Corriente de carga	≤500mA
potencia de trabajo	≤ 10W
Material de la carcasa	ABS material ignífugo forma
color	Cafe Blanco
Alcance	Puerta o ventana no ferrosa
Peso del Producto	24 g

• Introduction

SMQT

El interruptor magnético del contacto de la puerta es el sensor de puerta atado con alambre y el sensor de la ventana para el control de acceso de la puerta y el sistema de alarma.

PRODUCT PICTURE

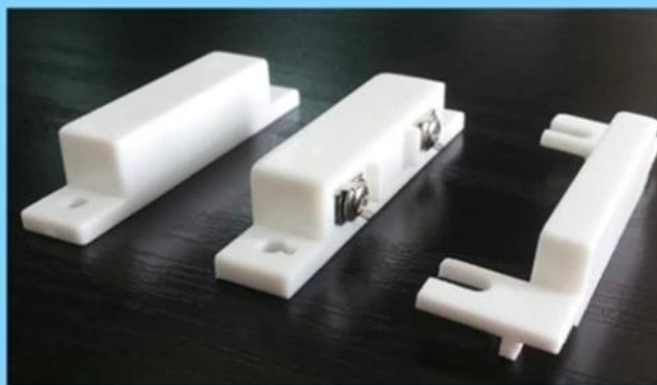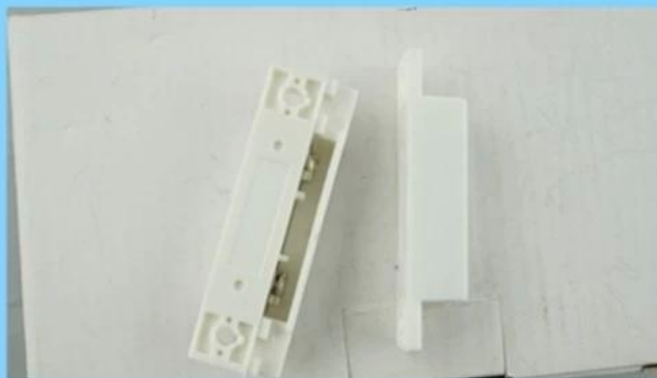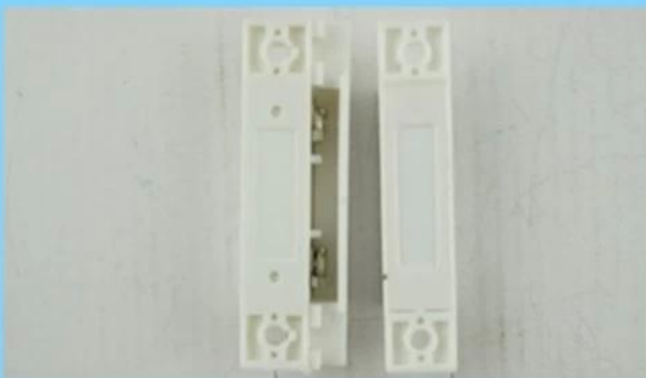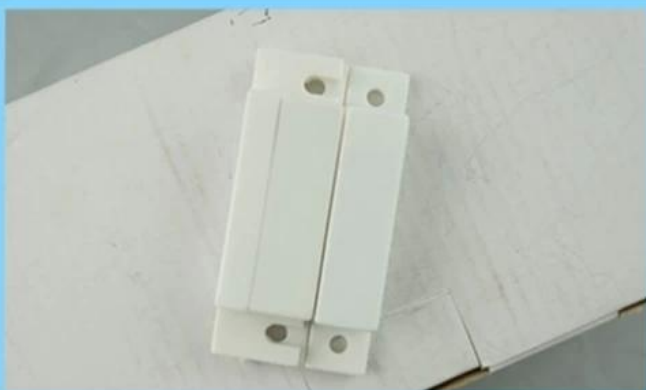

PRODUCT FEATURE



White



Brown

2 Color optional

Dimension:64×19×13(mm)

NO/NC mode optional

20±5(mm) gap

MAX voltage≤110VDC,MAX current≤500mA

Fireproof ABS material housing

Suitable for wooden door or window

Brown/ White color optional

Weight:24g

2 years quality warranty, welcoem OEM



• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair