

**Clavier de contrôle d'accès à porte unique à écran OLED avec
communication réseau RS485**





Main parameter

Power supply	DC 9-15V
Power consumption	< 1 W
Card type	13.56 MHz / 125 KHz (Optional)
Read range	5-8cm
Capacity of records	10000
Number of users	10000
Communication port	RS485
Transmit Rate	9600 bps (N, 8, 1)
LED Tips	Card flashing/keypad/doorbell
Data storage	4M bits FLASH Memory
Certification	Card flashing/ Card flashing+password/ User ID+password/ Public password
Clock	Yes
Reading tips	Beeper/OLED/LED
Dimension	96×96×22(mm)
Material	PC+ABS Screen: PMMA
Environment	-30℃to+65℃

PARAMÈTRE PRINCIPAL DE L'EA-82DK


Nom du produit:	Clavier de contrôle d'accès à porte unique à écran OLED avec communication réseau R485
-----------------	--

Numéro de modèle:	EA-83DK
Tension de travail:	9 ~ 15V DC
Consommation d'énergie:	<1W
Taille:	96× 96 × 22 (mm)
Capacité utilisateur:	10000 utilisateurs
Type de carte RFID:	ID (125Khz)
Distance de lecture de la carte:	3 ~ 5 cm
Port de fil:	Serrure, bouton de porte, lecteur de carte WG, sonnette de porte, capteur de porte
Clavier:	Bouton du clavier résistant à l'usure
Application:	Système de contrôle d'accès à une porte
Convient à:	Bureau, appartement, projet de système de contrôle d'accès hospital
Matériel:	Cadre ABS + carte PCB + écran OLED (PMMA)
Poids:	240g
Emballage:	Boîte en papier Netural et carton en papier 1 pcs par boîte, 37 boîtes par carton
Température de l'environnement de travail:	-35 °C ~ 65 °C
Humidité de travail:	20% ~ 80%
Garantie:	1 ans de garantie
OEM:	Bienvenue OEM

Appearance





Wiring diagram

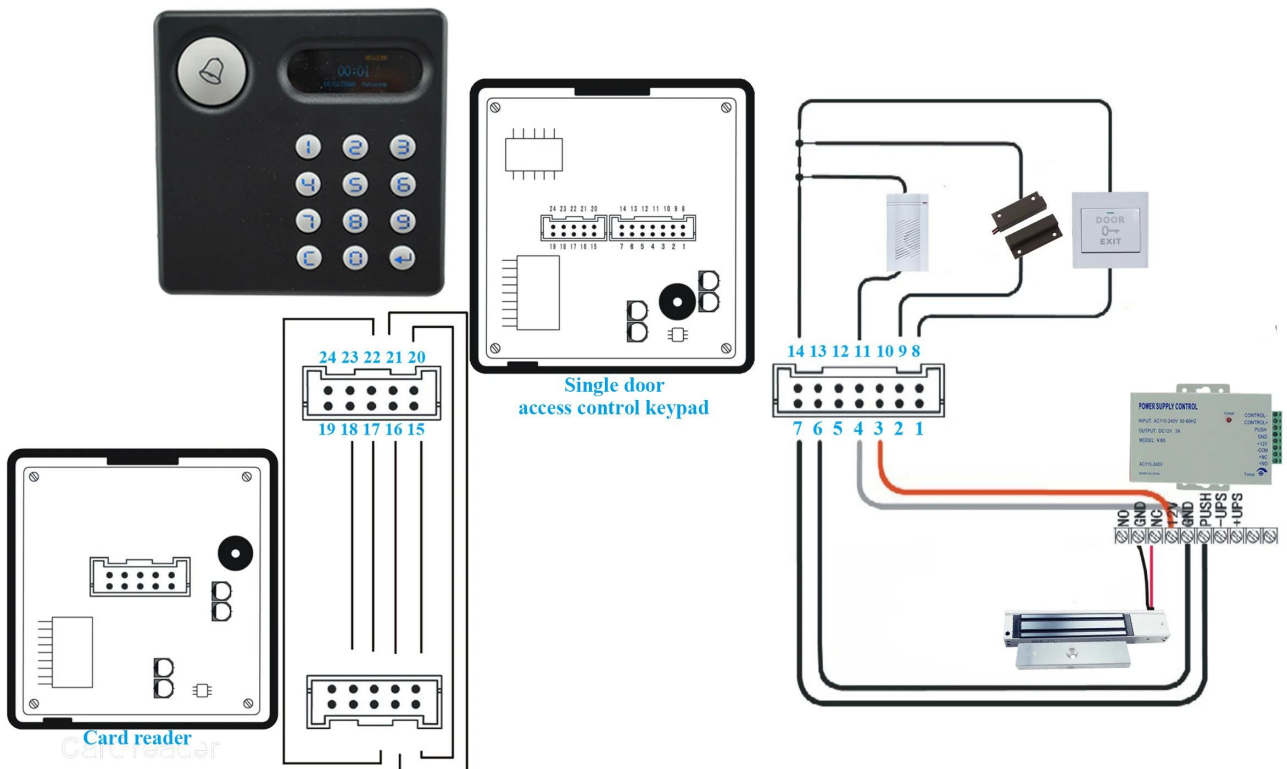

Wire port specification		
NO	Function	Description
1	RS485+	Data +
2	RS485-	Data -
3	12V+	DC Power 12V
4	GND	GND
5	OUT-NC	Door relay NC interface
6	OUT-COM.	Door relay COM interface
7	OUT-NO.	Door relay NO interface
8*	IN 1	Input 1, door release button input
9*	IN 2	Input 2, door magnet signal input
10*	IN 3	Input 3, user-defined
11	OC OUT	Build-in doorbell signal output
12*	OUT 2	OC signal, duress output
13*	OUT 3	OC signal, anti-tamper output
14	GND	GND
15	OUT 12V+	Power output, can be connected to WG reader power +
16	GND	Power output, can be connected to WG reader power GND
17	DATA 0	WG Data 0 input, connect reader Data 0
18	DATA 1	WG Data 1 input, connect reader Data 1
19	GND	GND
20	OC1-OUT	Unregistered card output, OC signal output for 3s after card flashing to open the door, can connect Green LED end of WG reader.
21	OC2-OUT	Unregistered card output, OC signal output for 3s after card flashing but not to open the door, can connect Red LED end of WG reader.
22	OC3-OUT	Unregistered card output, OC signal output for 3 times after card flashing to open the door, each interval time is 100ms, can connect Beeper end of WG reader.
23	NULL	N/A
24	ANTI-TAMPER-IN	Anti-tamper signal input, connect anti-tamper output signal of WG reader

Installation

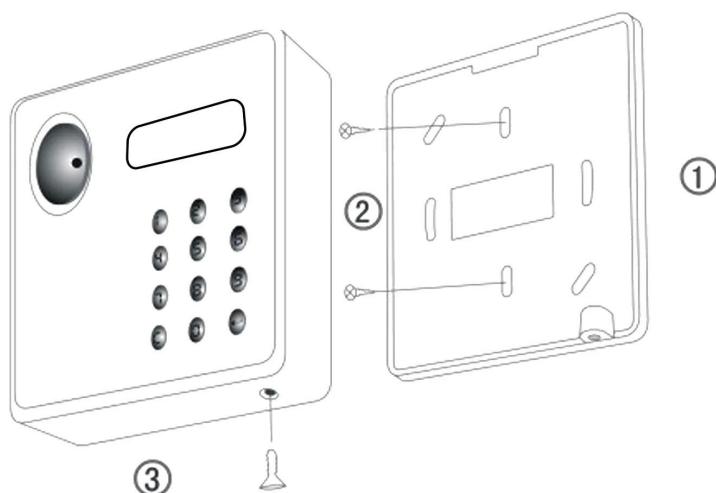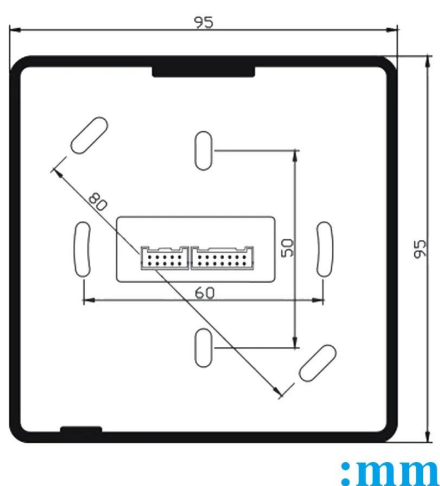

QU'EN EST-IL DES AUTRES CHOIX?

SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技

