


spécification	
Nom du produit	Capteur de porte magnétique sans fil
Modèle du produit	EB-130A
Source de courant	Batterie 23A, 12V
Courant de repos	≤10UA
Courant d'alarme	≤25MA
environnement de travail	Température de 10 °C ~ 50 °C Humidité relative ≤97%
Distance de transmission	Zone ouverte 100 m
Dimensions	65 * 38 * 20 (millimètre)
Emplacement d'installation	Portes, fenêtres
Matériau de coque	abdos

- 1, conception de circuits monopuce, traitement intelligent, stable et fiable.
- 2, avec fonction de détection basse tension.
- 3, l'émetteur sans fil radiofréquence prenant en charge l'utilisation du panneau de commande.
- 4, conception compacte, belle apparence, installation facile.
- 5, surveiller et contrôler toutes sortes de portes et fenêtres et hors tension.



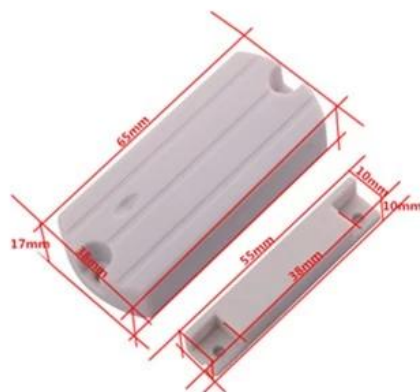

● Installations

SMQT



▲ *Installation*

Selected installation area outdoor or window, then fixtured it with screws.

Note: The gap must < 45mm.

The working environment should be dry and clean.

● Packing list

SMQT

Liste d'emballage	
Nom du produit	Capteur de porte magnétique sans fil
Qté	200 pcs / boîte
Taille du carton	40 * 30 * 20 (cm)
Poids	10Kg



● Office

SMQT®



● Exhibitions

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair