

• *Parameter*

SMQT

Dimensions	224L * 224W * 83H (mm)
La tension de sortie	DC12V
Courant de sortie	5A
Puissance de sortie	60W
Réglage du délai	0 ~ 10s
Spécialement conçu	Verre à double paroi, transformateur en cuivre, coquille en acier
fonction de sécurité	Protection contre les courts-circuits, protection contre les décharges
Portée	Contrôle d'accès, système intercom de bâtiment
Peut être accédé par batterie de secours	12V 7AH

• *Introduction*

SMQT



L'alimentation ininterrompue imperméable (ups) est variable 12v
fourniture d'alimentation en porcelaine et utilisé avec le système de
contrôle des accès de porte et système d'alarme.

• Dimension

SMQT



• Feature

SMQT



Access control switch power supply

AC 220V input, DC 12V 5A output

0~10s time relay(adjustable)

Short circuit protection, charge protection

Double face PC board, pure copper

transformer, steel shell


Suitable for access control and

doorphone system

12v 7Ah backup battery optional

Welcome OEM and order sample test

2 years quality warranty

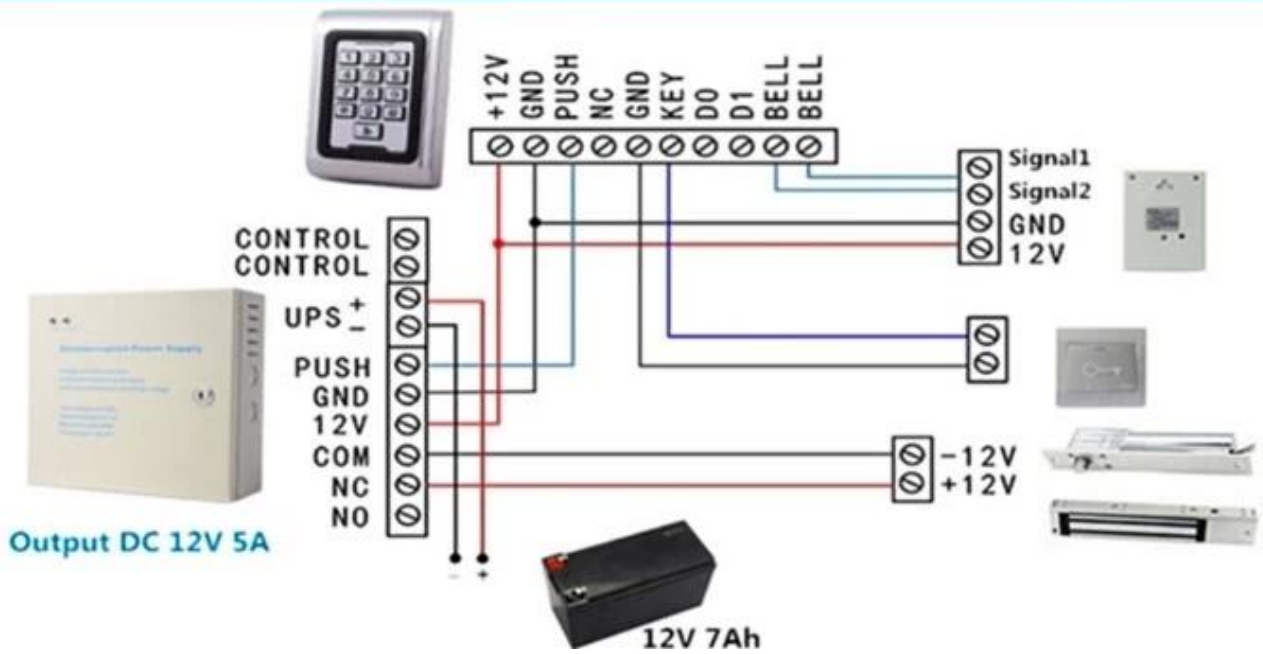

• *Packaging & shipping*



● *Office show*

SMQT®



● *Exhibition*

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....

How to cooperation

SMQT



Trade terms:	EXW
Payment terms:	T/T, Western union, Paypal etc
Delivery time:	Normal order within 7 days, bulk order 10-15days
Packing:	Neutral paper box and paper carton
Shipping:	Express company or by sea, by air or appointed by buyer