

WeChat Mini Program QR code & RFID13.56MHz WG format output Card reader para sa control access sa pinto



Pangunahing parameter ng MQ-360R

Pangalan:	WeChat Mini Program QR code & RFID13.56MHz WG format output Card reader para sa control access sa pinto
Numero ng modelo:	MQ-360R
Power supply:	DC 12V
Ang mapagkukunan ng QR code:	Mini Program ng WeChat
QR pagbabasa mode:	COMS
Anggulo ng pagbabasa ng QR:	> 80 degree
Bilis ng pagbabasa ng QR:	<0.01s
RFID card type:	IC (13.56Mhz)
Ang distansya sa pagbabasa:	3 ~ 10cm
Sukat:	114 * 74 * 21 (mm)
Kulay:	Itim
Timbang:	0.15kg
OEM:	Suportado

Ano ang mga feateurs MQ-360R?

Size



Appearance



RFID Card & WeChat Mini Program Open door



QR code display window
Long press to send (call WeChat)
Users can also send screenshots to guests.

有效期/次: 2018-02-27 22:46/不限

QR code validity period and frequency hint



Set the effective time and number of QR codes
(1 minute to 24 hours, default 10 minutes unlimited)

Set the effective times of QR codes
(1~9 times, 0 is unlimited, default is not limited)

Click to regenerate the QR code as above setting


Click to display the user ID number

After the user's mobile phone WeChat added "QROPEN" applet, click "Register" to display the user card number (8-digit decimal) generated by the applet by default. The card number is fixed for a long time.


Each time the user uses it, just click "Open Code" to display a 10-minute valid QR code. Then, after brushing the code on the access control, the access control will identify the user's card number, timeout or super time. After that, the access control will not be accepted. The user applet card number is fixed and will not change with the change of the QR code.

When a guest visits, the user opens the "open code" and sets the effective time and number of the QR code. Click "Generate QR Code" to refresh a QR code immediately. The QR code does not need to be authorized again! After the user takes a screen shot, they use the online chat software such as WeChat to send the guest, and the guest can open the door within the set time and number of times.

Wire diagram

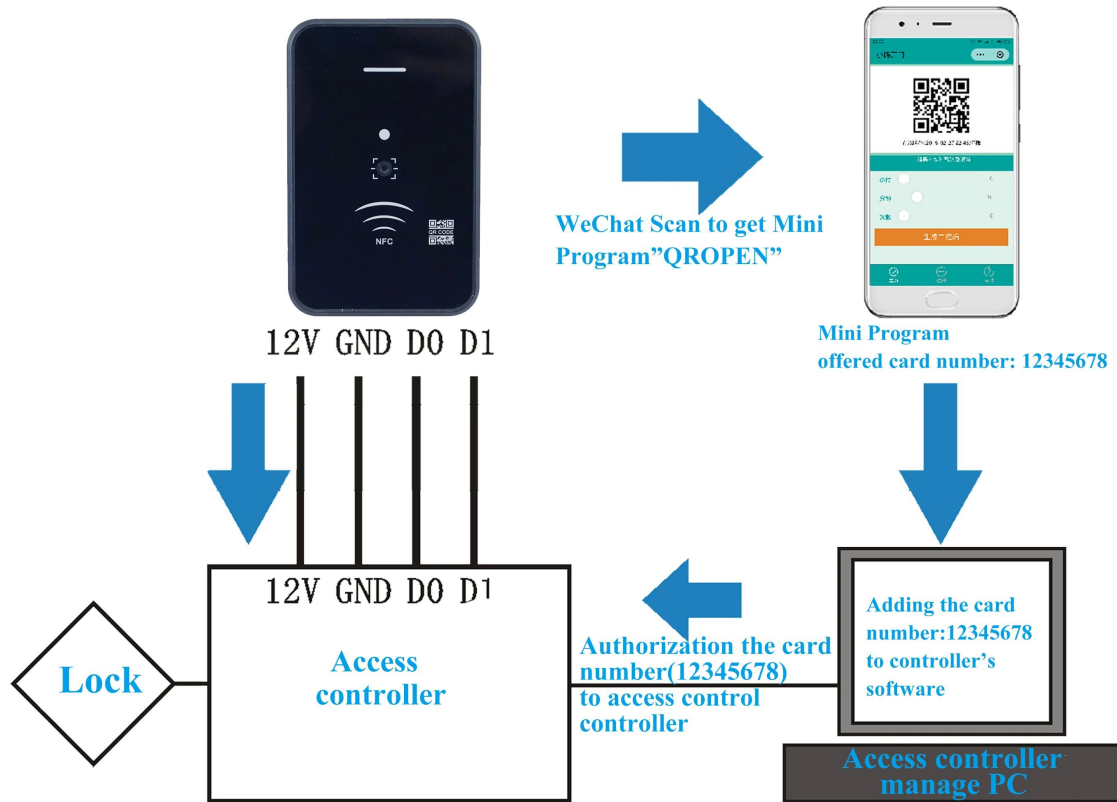

Applicable place



Access controller



Barrier gate

Paano ang tungkol sa iba pang pagpipilian?

