

Wired metal magnetic contact sensor

NO/NC Code mode optional

50±10(mm) gap distance

Max voltage≤100V DC,Max current≤500mA

Suitable for metal door or window

Material:mode A is Alloy-zn

mode B is ABS

Silver color

Weight:mode A 158g,mode B 62g

SMQT®



• Parameter

SMQT®



Dimensioni	106 * 16 * 16 (mm)
connessione	Normalmente aperto / normalmente chiuso
distanza operativa	50 ± 10 (mm)
pressione massima	≤100VDC
corrente di carico	≤500mA
Potenza di lavoro	≤ 10W
Materiale base	Una lega di zinco B ABS
forma colore	argento
portata	Ferro serramento
Peso del prodotto	158g / 62g

• Introduction

SMQT®

L'interruttore di contatto magnetico per porta è l'interruttore sensore magnetico del portello per il sistema di controllo porta di accesso e sistema di sicurezza di allarme.

PRODUCT PICTURE

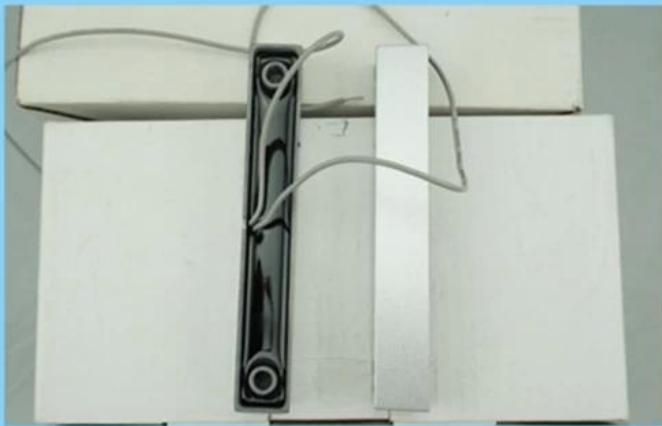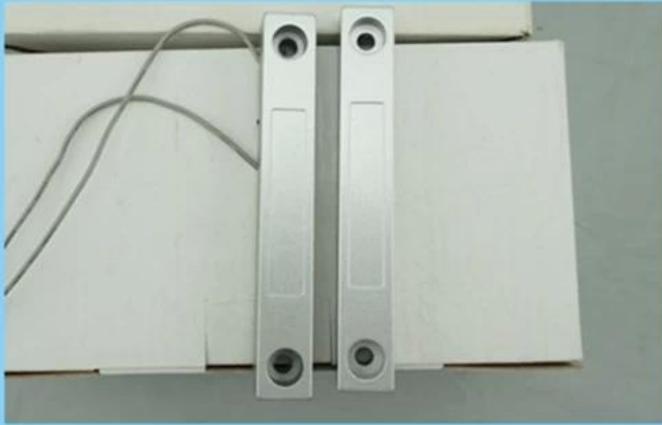

PRODUCT FEATURE



Wired magnetic contact sensor

NO/NC code mode optional

50±10(mm) gap distance

MAX voltage:≤100V DC,MAX current≤500mA

Material: mode A:Alloy-zn, mode B:ABS

Suitable for metal door or window

Color:grey silver

Weight: mode A:158g mode B:62g

Welcome OEM and 2 years quality warranty

WHY CHOOSE US ?



1.7 Years golden supplier in Alibaba platform.

2.Our product follow CE standard.

3.Provide 2 years quality warranty.

4.Welcome OEM and ODM.





● Exhibition

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair