

Wired magnetic door sensor

Fireproof ABS material housing

20±5(mm) gap

Max voltage≤100V DC,Max current≤500mA

Use for wooden door or window

White/Black color optional

SMQT



• Parameter

SMQT





Dimensioni	64L * 19W * 13H (mm)
Connessione	Normalmente aperto / normalmente chiuso
distanza operativa	20 ± 5 (mm)
pressione massima	≤100VDC
corrente di carico	≤500mA
potere di funzionamento	≤ 10W
Materiale alloggiamento	ABS forma materiale ignifugo
Colore	Marrone / Bianco
portata	porta o una finestra non ferrosi
Peso del prodotto	24g

• Introduction

SMQT

L'interruttore di contatto magnetico per porta è il sensore porta cablata e sensore di finestra per il controllo degli accessi porta e sistema di allarme.

PRODUCT PICTURE

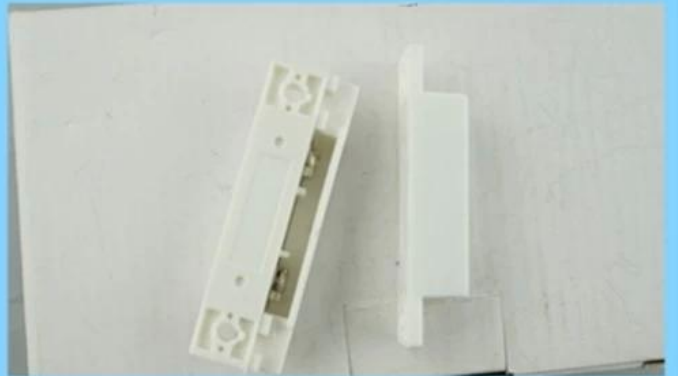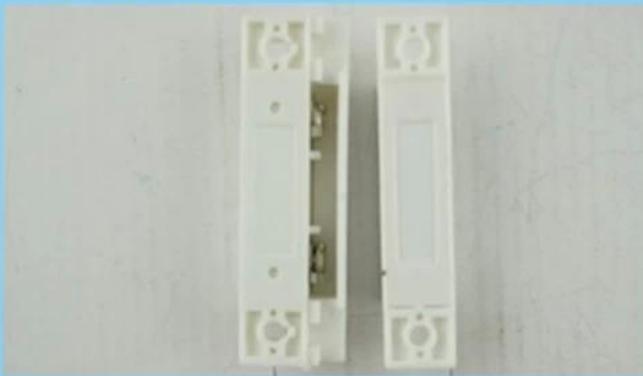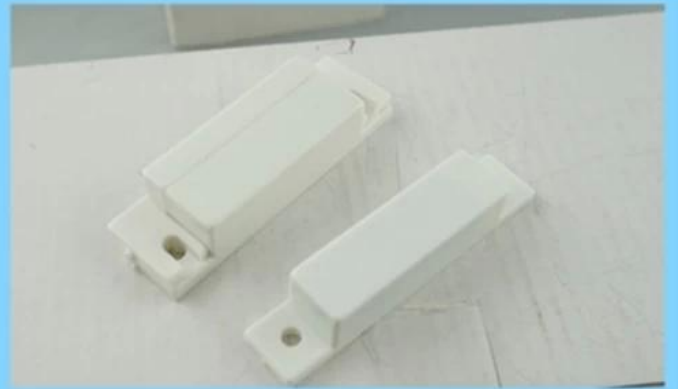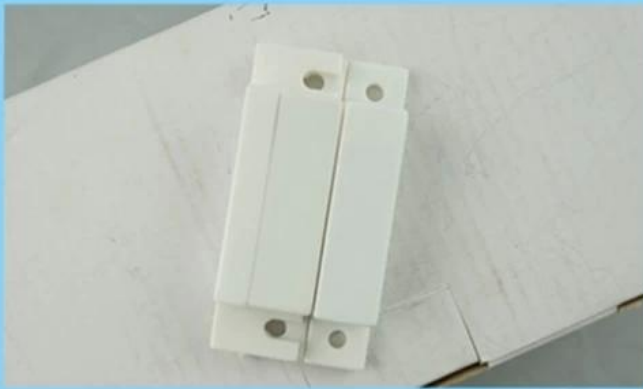

PRODUCT FEATURE



White



Brown

2 Color optional

Dimension: 64×19×13(mm)

NO/NC mode optional

20±5(mm) gap

MAX voltage ≤ 110VDC, MAX current ≤ 500mA

Fireproof ABS material housing

Suitable for wooden door or window

Brown/ White color optional

Weight: 24g

2 years quality warranty, welcome OEM



● Office show

SMQT®



● Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....