

WG26/34 adjustable outdoor door access control IC(13.56MHz) card reader




EA-61'S MAIN PARAMETER

Product Name:	WG26/34 adjustable outdoor door access control IC(13.56MHz) card reader
Model number:	EA-61
Power supply:	DC 12V
Working current:	<100mA
Card type:	IC card(13.56MHz)
Communication format:	WG26/WG34(adjustable)
Reading distance:	5~15cm
Communication distance:	>80m(between card reader and controller)
Waterproof:	IP66(suitable for outdoor use)
Dimension:	95L*95W*20H(mm)
Wires:	6 wires
Contact output:	12V+(Red wire)/GND(Black wire)/D0(Green)/D1(White)/LED (Grey)/WG(Purple)
Suitable for:	IC Card door access control system
Material:	Alloy frame+Plexiglass panel+ ABS back cover+ PCB board
Housing color	Black and Silver
Weight:	0.3kg

Warranty:	2 years warranty
OEM:	Welcome OEM

WHAT FEATURES EA-61 HAVE?

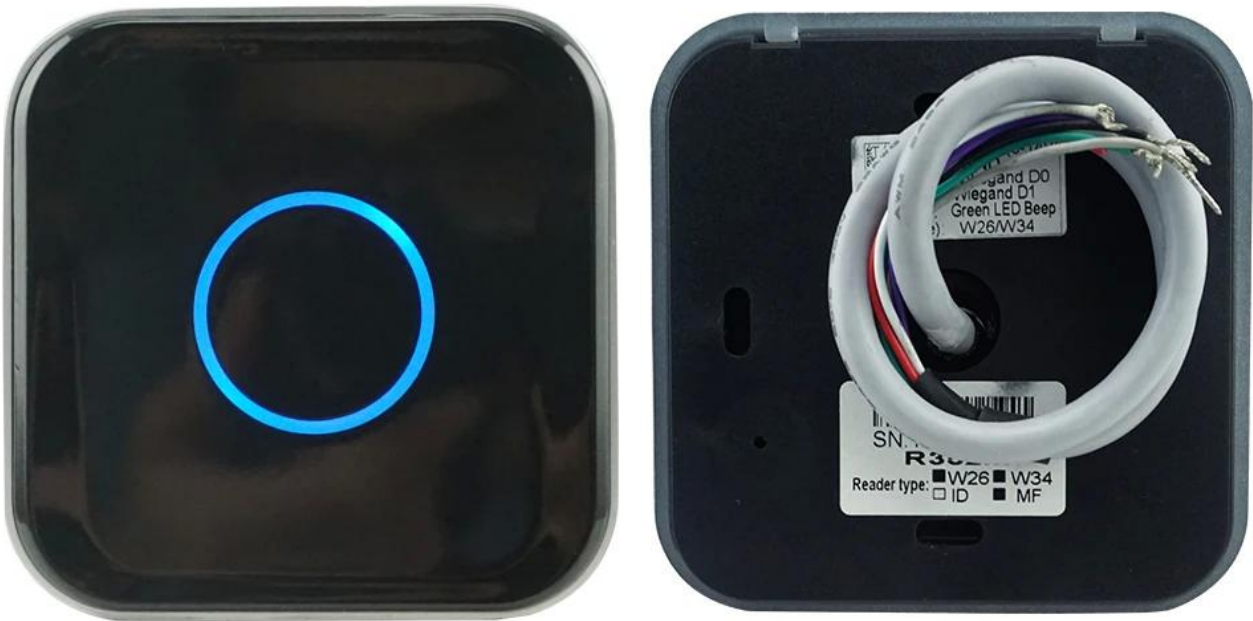

1. Waterproof door access control IC Card reader with WG26/34 adjustable

2. Power supply DC 12V

3. Working current <100mA

4. Output load 2A 12V

5. Card type IC 13.56Mhz (Mifare card)

6. Reading distance 5~15cm

7. WG format WG26/34 adjustable

8.6 wires: +12/GND/D0/D1/LED/WG

9. Suitable for all kinds of access control system

10. Working temperature -20°C~60°C

11.2 years warranty , welcome OEM

WHAT DOES EA-61 LOOK LIKE ?



HOW ABOUT THE EA-61'S STANDARD PACKAGING?




WHERE IS THE EA-61 SUITABLE FOR INSTALLATION?



Wiring diagram




Card reader EA-61

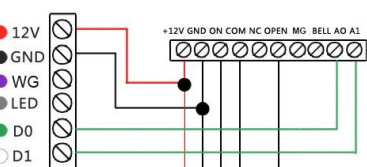

Access control keypad



Access control power supply



Door release button



Lock

How to adjust WG26/WG34 output?

WG34



Connect the purple and black wires of the card reader to the controller's GND connector.

WG26



Do not connect the card reader's purple wire.

Application site



Apartment



Villa



Home



School



Hospital



Document Room

HOW ABOUT OTHER CHOICE?

SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技

