

## ● Parameter

SMQT®

Specification	
Dimensions	86L * 86W * 50H (mm)
Operating Voltage	30VDC
Working current	2A
Pressure	250V
Operating temperature	-10 °C ~ 50 °C
Colour	Red / Green
Reset mode	automatic


## ● Introduction

SMQT®

When the alarm occurs, press down button to alarm  
Switching status: normally open / normally closed  
Color: Red / yellow / white / green optional  
Standard Structure: fireproof material shell, easy installation  
Application types: security doors, escape door, security system  
Optional accessories: Surface cover  
Panel processing: Materials fire, matte anti-press


## ● Dimesion Picture

SMQT®

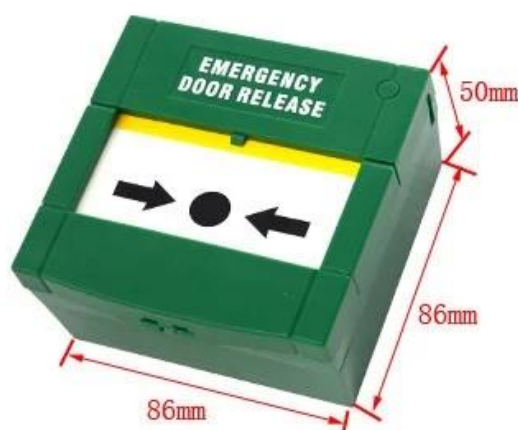

## ● Installations

SMQT®

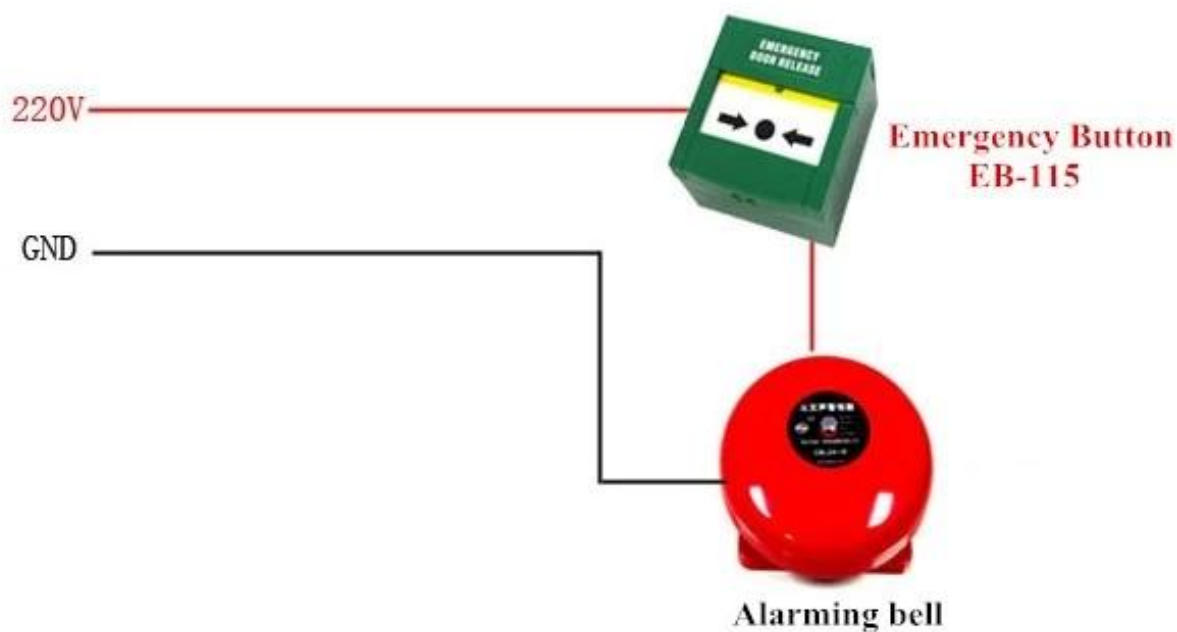


## ● Features

**SMOT**

High Cost-Effective: 1. Advanced technology, quality assurance.  
2. Structure is simple, modern design, easy to install.  
3. Reasonable price.

## ● Packing list

**SMOT**

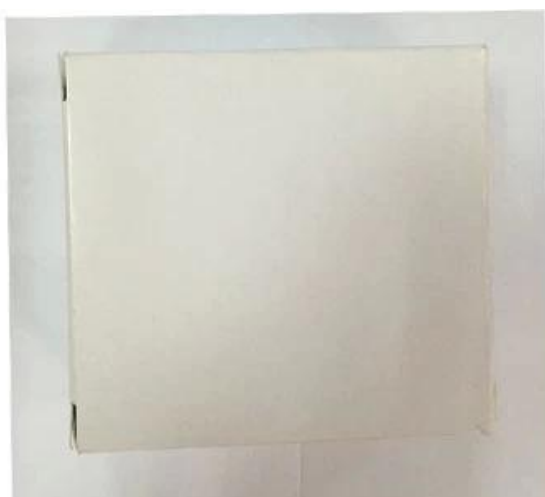

Qty	100 / box
Packing Specifications	47L * 39W * 30H (cm)
Packing weight	16.12Kg



## ● Office

SMQT



## ● Exhibitions

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair