

• *Parameter*

SMQT

number ng produkto	EA-22A	EA-22B
Standard Structure	Aluminum panels, mga pindutan metal	Aluminum panels, mga pindutan metal
electrical Performance	Kasalukuyang maximum na tibay 3A36VDC	Kasalukuyang maximum na tibay 3A36VDC
tibay test	500,000 beses aging nasubok	500,000 beses aging nasubok
para sa Uri	Nauukol guwang frame at lubog electrical box	Nauukol guwang frame at lubog electrical box
temperatura	-10 ~ + 55 °C	-10 ~ + 55 °C
Nauukol halumigmig	0 Mga sa 95% (kamag-anak kahalumigmigan)	0 Mga sa 95% (kamag-anak kahalumigmigan)
panel Processing	Aluminum panels sandblasted	Aluminum panels sandblasted

• *Introduction*

SMQT



Door button lock release sa mga materyal ng metal at hindi

kinakalawang na asero push exit button para sa access control system.

• **Feature**

SMQT



EA-22A



EA-22B



EA-22A



EA-22B

Advantages

Aluminum panel with the sand blast treatment

Pure copper plating nickel button


500,000 times mechanical test

• **Installation**

SMQT



Switch power supply

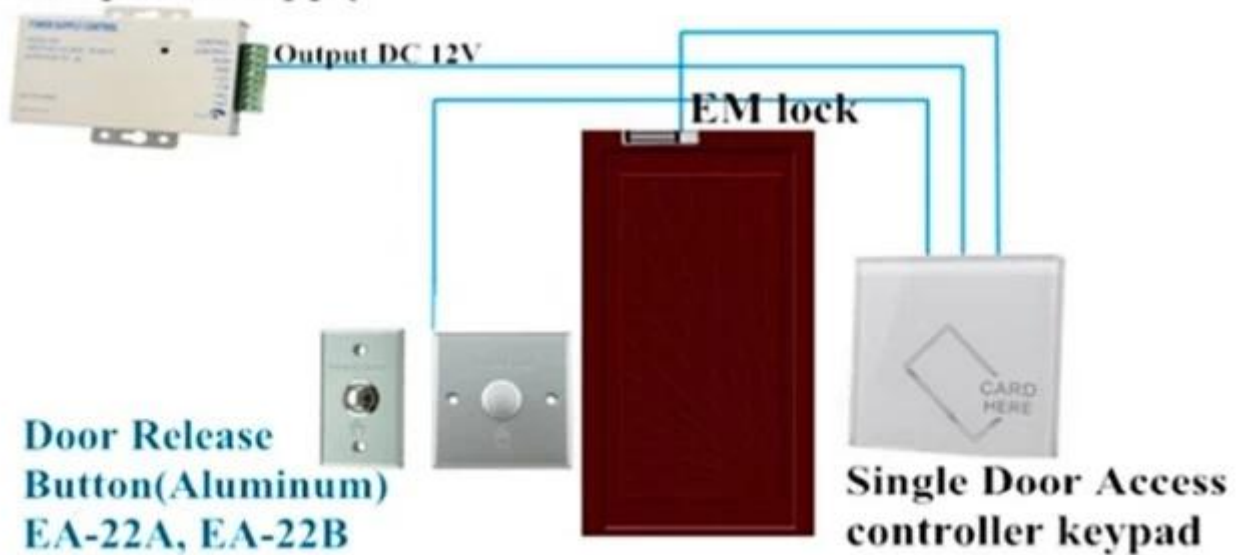

•Dimension



• Packaging & shipping

SMQT®





● *Office show*

SMQT®



● *Exhibition*

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair