

Shutter door magnetic contact sensor

NO/NC code mode optional

60±10(mm) gap distance

Mode A&B: Max voltage≤100VDC

Max current≤500mA

Mode C: Wireless 433mhz(1527),12V DC

Alloy-zn and alloy-al Material

Suitable for shutter door

Wieght: A:210g B:280g C:290g

SMQT®



• Parameter

SMQT®

| | |
|-------------------------------|---|
| parametro | |
| produkto pangalan | panangga sa bintana pinto magnetic contact sensor |
| modelo | EB-137 |
| sukat | 106 × 38 × 10 (mm) |
| kodigo paraan | NO / NC (opsyonal) |
| puwang | 60 ± 10 (mm) |
| Max Boltahe | ≤100V DC Mode C: 12VDC |
| Max kasalukuyan | ≤500mA |
| Max marka | ≤10W |
| kulay | kulay-abo |
| terno para | panangga sa bintana pinto |
| materyal | A.alloy-zn, B.alloy-Al & haluang metal-zn C: wireless |
| lambat timbang | A: 0.21Kg B: 0.28Kg C: 0.29Kg |
| wireless dalas | 433MHz (1527chip code) |
| wirless transmission distance | & Lt; 100m |

• In-kind shooting

SMQT®




• *Feature*

SMQT

EB-137A

EB-137B

EB-137C

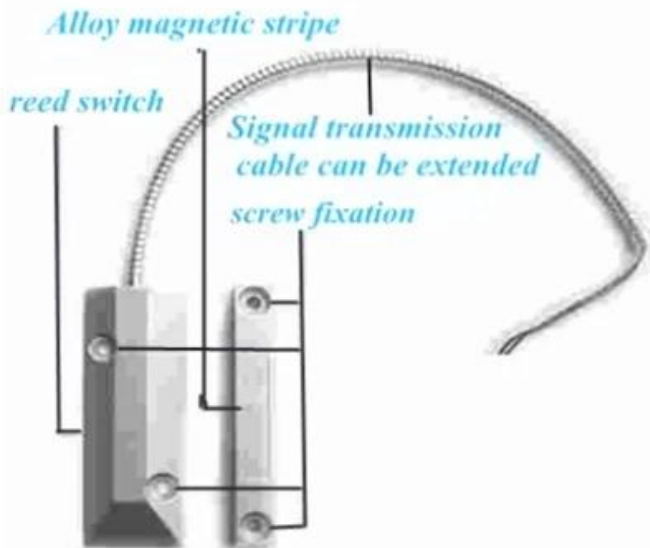

• **Packaging & shipping**

SMQT

listahan packaging

| | |
|----------------------|-----------------------|
| Pangalan ng Produkto | |
| Dami | 50 PC ng bawat karton |
| carton laki | 38 * 30 * 30 (cm) |
| timbang | 10 ~ 17kg |



• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....