

Wired magnetic door sensor

Fireproof ABS material housing

20±5(mm) gap

Max voltage≤100V DC,Max current≤500mA

Use for wooden door or window

White/Black color optional

SMQT








• Parameter

SMQT

parametro	
Pangalan ng Produkto	Wired pinto magnetic sensor
modelo	EB-131
sukat	64 × 19 × 13 (mm)
code mode	NO / NC (opsyonal)
puwang	20 ± 5 (mm)
Max boltahe	≤100V DC
Max kasalukuyang	≤500mA
Max rating	≤10W
kulay	Brown / White (opsyonal)
suit para sa	kahoy na pinto o window
materyal	Fireproof ABS pabahay
Paggawa temperatura	-10 °C ~ 50 °C
net timbang	24g

• In-kind shooting

SMQT

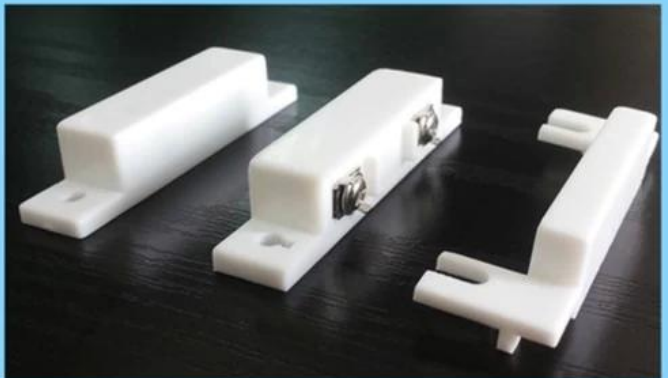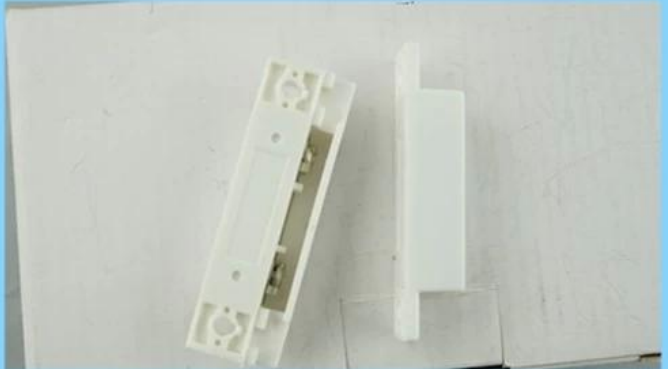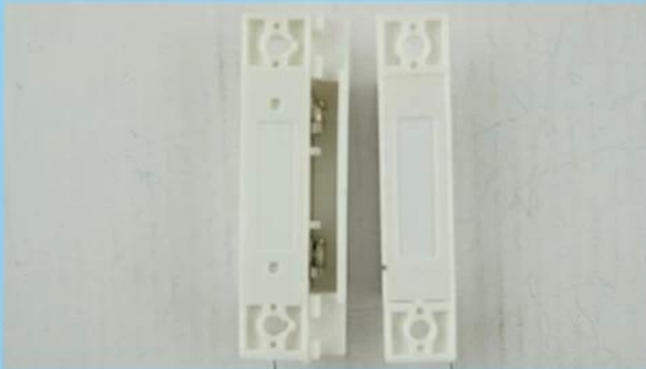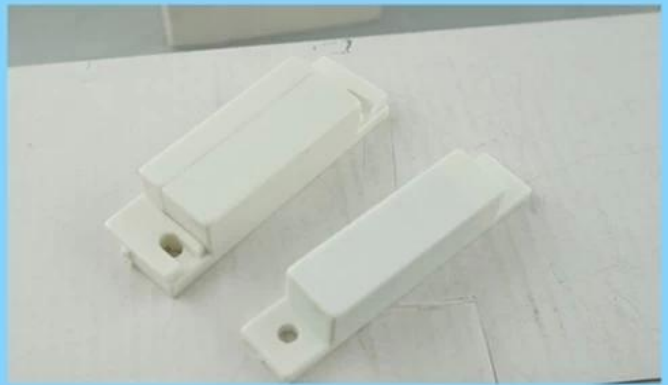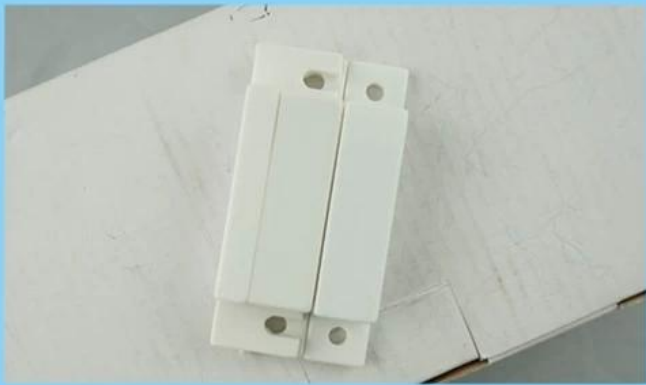

● *Feature*

SMQT



White



Brown

2 Color optional

Dimension:64×19×13(mm)

NO/NC mode optional

20±5(mm) gap

MAX voltage≤110VDC,MAX current≤500mA

Fireproof ABS material housing

Suitable for wooden door or window

Brown/ White color optional

Weight:24g

2 years quality warranty, welcoem OEM

• ***Packaging & shipping***

SMQT

listahan packaging	
Pangalan ng Produkto	EB-131 Wired pinto magnetic sensor
Dami	800 PC ng bawat karton
carton laki	37 * 30 * 29 (cm)

timbang

20kg



• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair