

● Parameter

SMQT®

Dimensions	88 * 88 * 20 (mm)
Standard Structure	Stainless steel panels, stainless steel key
Electrical Performance	Current maximum durability 3A36VDC
Output node	NC / COM
Durability test	Hundred thousand times aging tested
For Type	Hollow frames and submerged electrical box
Security Type	Surface water and anti-copying keys
Panel Processing	Stainless steel panels, brushed

● Introduction

SMQT®

- 1 Luxury stainless steel panel, beautiful and durable copy protection keys,
- 2 durability tested thousands of times more contact output, suitable for different types of locks requires advanced access control system supporting the designated products
- 3 Applicable hollow frames and submerged electrical box
- 4 waterproof and anti-surface latch keys complex
- 5 Applicable temperature: -10 ~ 55 °C (14-131F) Applicable humidity: 0 ~ 95% (relative humidity)
- 6 stainless steel panel, pull profiling process


● Dimesion Picture

SMQT®



● Installations

SMQT®

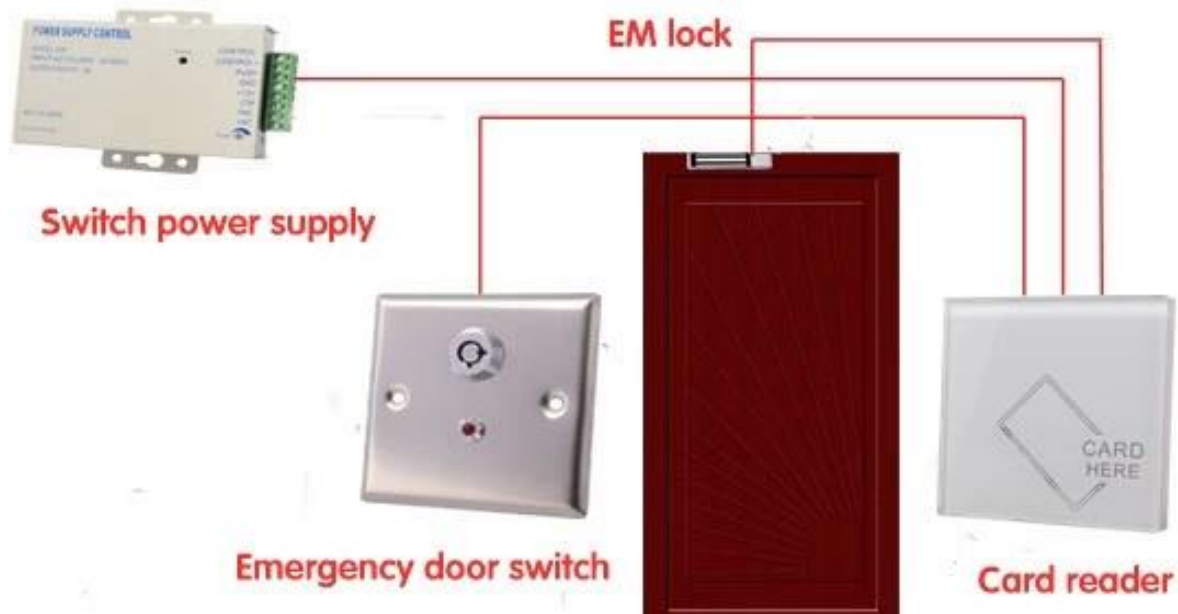

● Features

SMOT



Stainless steel Emergency door release button with key

With high light LED, high quality stainless steel, waterproof surface design, long time working life, and the key cannot be copied.

Stainless steel cover with spraying
and printing, and special beautiful
design



● Packing list

SMQT



QTY	100pcs/CTN
Package Size	46.5L * 37.5W * 28H (cm)
Gross Weight	10.1kg