

● Parameter


SMQT®

Dimensions	205L * 165W * 74H (mm)
The output voltage	DC12V
Output current	3A
Delay setting	0-15s
Specially designed	Double-pane glass, copper transformer, steel shell
security function	Short circuit protection, anti-jamming
Scope	Access control, building intercom systems, door button can be accessed
Optional	Remote Control (remote control without interference from the open ground 80 meters)
Can be accessed by backup battery	12V 7AH

● Introduction

SMQT®

The power supply is 12 volt 5 amp switching power supply controller. This power supply can use the 12 volt rechargeable backup battery.

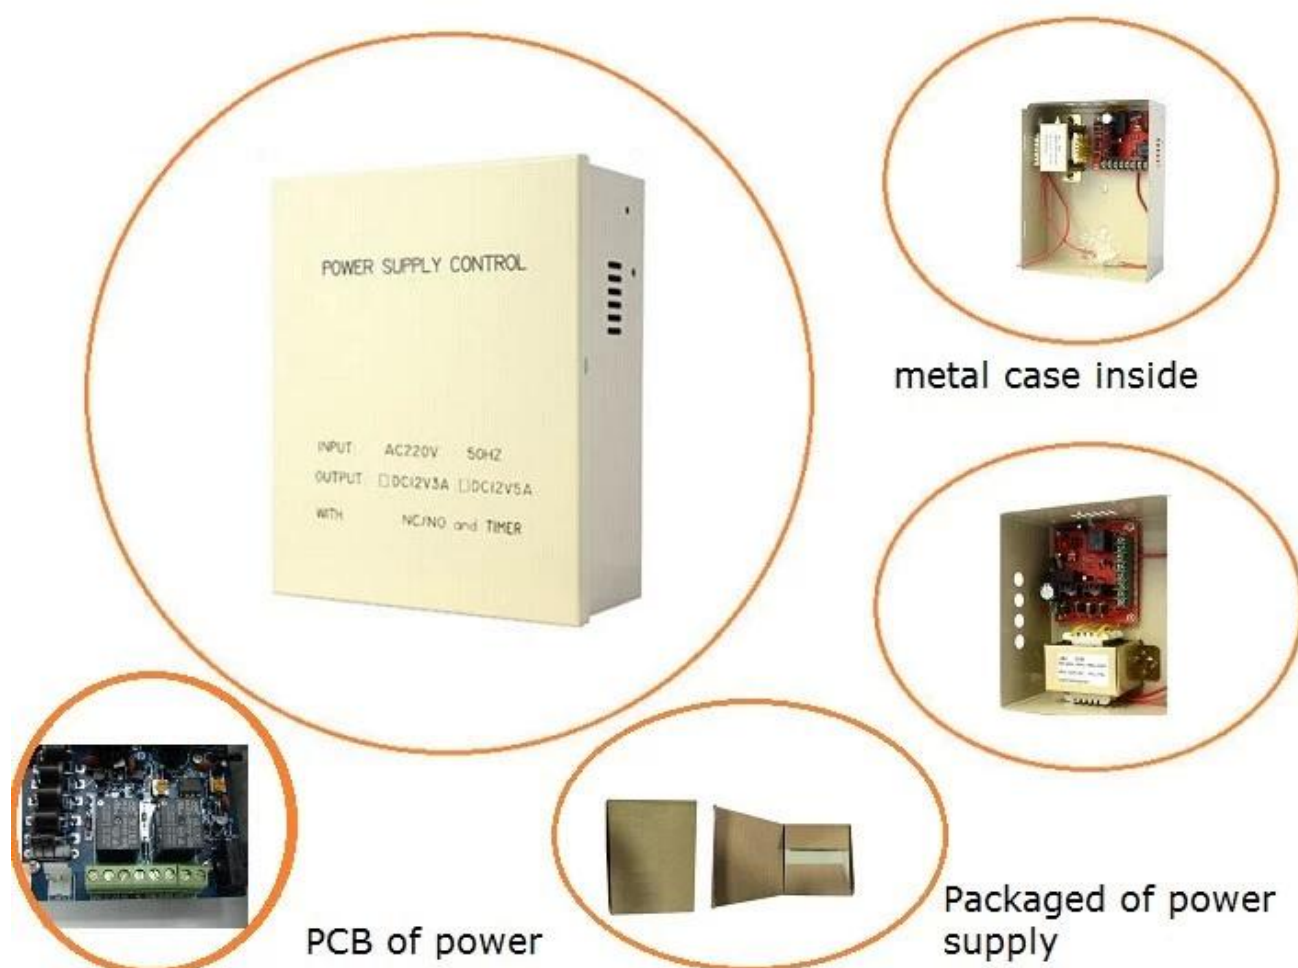

● Dimesion Picture

SMQT®



● Installations

SMQT®



● Features

SMQT®

It can reduce the load of access controller, save project wiring, reducing failure risk.

Let NC / NO ☒ Output, can control various types of electric locks. Set time delay control circuit, lock time can be in 0-10 seconds, set open button input, can directly open the electric lock.

Automatic protection function, when the power short circuit accident occurs, the power is automatically disconnected temporarily or blown fuse.

Can be accessed battery can continue to supply after a power outage.
Suitable for building intercom, access control various entrances and exits.

● Office

SMQT



● Exhibitions

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair