

## ● Parameter

SMQT®

Dimensions	205L * 165W * 74H (mm)
The output voltage	DC12V
Output current	5A
Output Power	60W
Delay setting	0 ~ 15S
Specially designed	Double-pane glass, copper transformer, steel shell
security function	Short circuit protection, anti-jamming
Scope	Access control, building, door button can be accessed, buildings may unlock signal
Can be accessed by backup battery	12V 7AH

## ● Introduction

SMQT®

Can reduce the load of access controller, save project wiring, reducing failure risk.

Let NC / NO ☒ Output, can control various types of electric locks. Set time delay control circuit, lock time can be in 0-10 seconds, set open button input, can directly open the electric lock.

Automatic protection function, when the power short circuit accident occurs, the power is automatically disconnected temporarily or blown fuse.

Can be accessed battery can continue to supply after a power outage.

Suitable for building intercom, access control various entrances and exits.

The dc power supply 12v use with the access control system,door phone system.It with the led power supply and metal box.

## ● Dimesion Picture

SMQT®



## ● Installations


SMQT®



## ● Features


**SMQT**

Set up automatic protection function, built-in fuse  
With a charge-discharge circuit, after power can continue to supply  
Outstanding feature is the constant output voltage for the electronic devices are more stable job to provide protection  
Can reduce the load of access controller, save project wiring, reducing failure risk

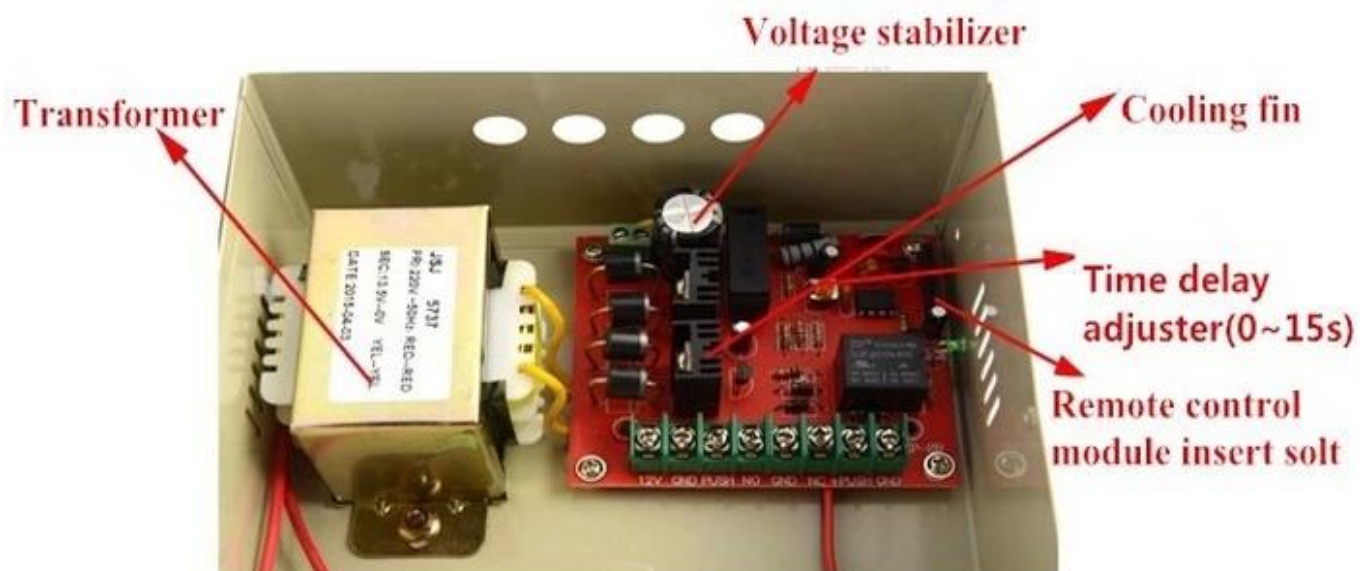

## ● Packing list

**SMOT**

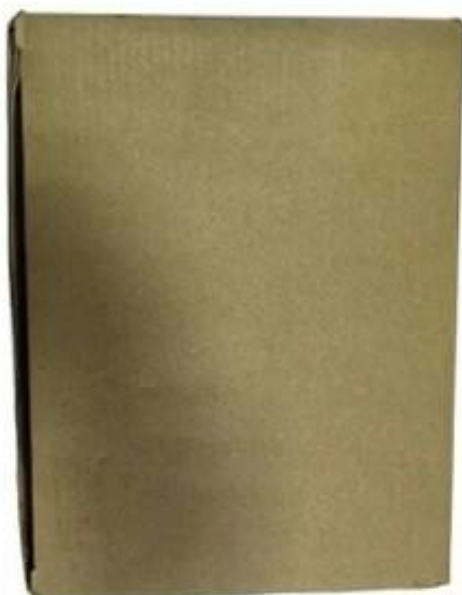

Qty	10 / box
Packing Specifications	50L * 41W * 26H (cm)
Packing weight	25Kg

## ● Office

**SMQT**



## ● Exhibitions

**SMQT**

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

