

WG26 / 34 ayarlanabilir dış kapı erişim kontrolü IC (13.56 MHz) kartı okuyucu



EA-61'İN ANA PARAMETRESİ

Ürün Adı:	WG26 / 34 ayarlanabilir dış kapı erişim kontrolü IC (13.56MHz) kart okuyucu
Model numarası:	EA-61
Güç arz:	DC 12V
Çalışma akımı:	& Lt; 100 mA
Kart tipi:	IC kartı (13.56 MHz)
İletişim biçimi:	WG26 / WG34 (ayarlanabilir)
Okuma mesafesi:	5 ~ 15cm
İletişim mesafe:	> 80m (kart okuyucu ve denetleyici arasında)
Su geçirmez:	IP66 (dış mekan için uygun kullanım)
Boyut:	95L * 95W * 20H (mm)
telleri:	6 tel
İletişim çıkışı:	12V + (Kırmızı kablo) / GND (Siyah kablo) / D0 (Yeşil) / D1 (Beyaz) / LED (Gray) / WG (Mor)
İçin uygun:	IC Kart kapısı erişim kontrolü sistem
Malzeme:	Alaşımlı çerçeve + Pleksiglas panel + ABS arka kapak + Baskılı devre kartı
Konut rengi	Siyah ve gümüş
Ağırlık:	0.3kg

Garanti:	2 yıl garanti
OEM:	Hoşgeldin oem

ÖZELLİKLER EA-61 VAR?

EA-61 GİBİ NEDİR?



EA-61'in STANDART AMBALAJI HAKKINDA NASIL?




KURULUM İÇİN EA-61 UYGUNLUĞU NEREDE?



Wiring diagram




Card reader EA-61

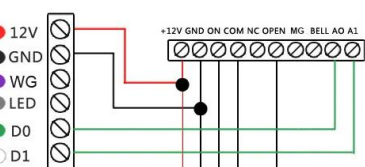

Access control keypad



Access control power supply



Door release button



Lock

How to adjust WG26/WG34 output?

WG34



Connect the purple and black wires of the card reader to the controller's GND connector.

WG26



Do not connect the card reader's purple wire.

Application site



Apartment



Villa



Home



School



Hospital



Document Room

DİĞER SEÇİM HAKKINDA NASIL?

SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技

