


• *Parameter*

SMQT

Product name	Photoelectric Smoke detector
Product model	EB-117
Operating temperature	-10 °C ~ + 50 °C
Alarm concentration	0.65 ~ 15.5% FT
Working humidity	10 to 90%
Power supply	DC12 / DC9V
Signal output	NC / NO
Mounting	Ceiling
shell	Retardant resin
Product Size	Φ104 * 51 (mm)

• *Introduction*

SMQT

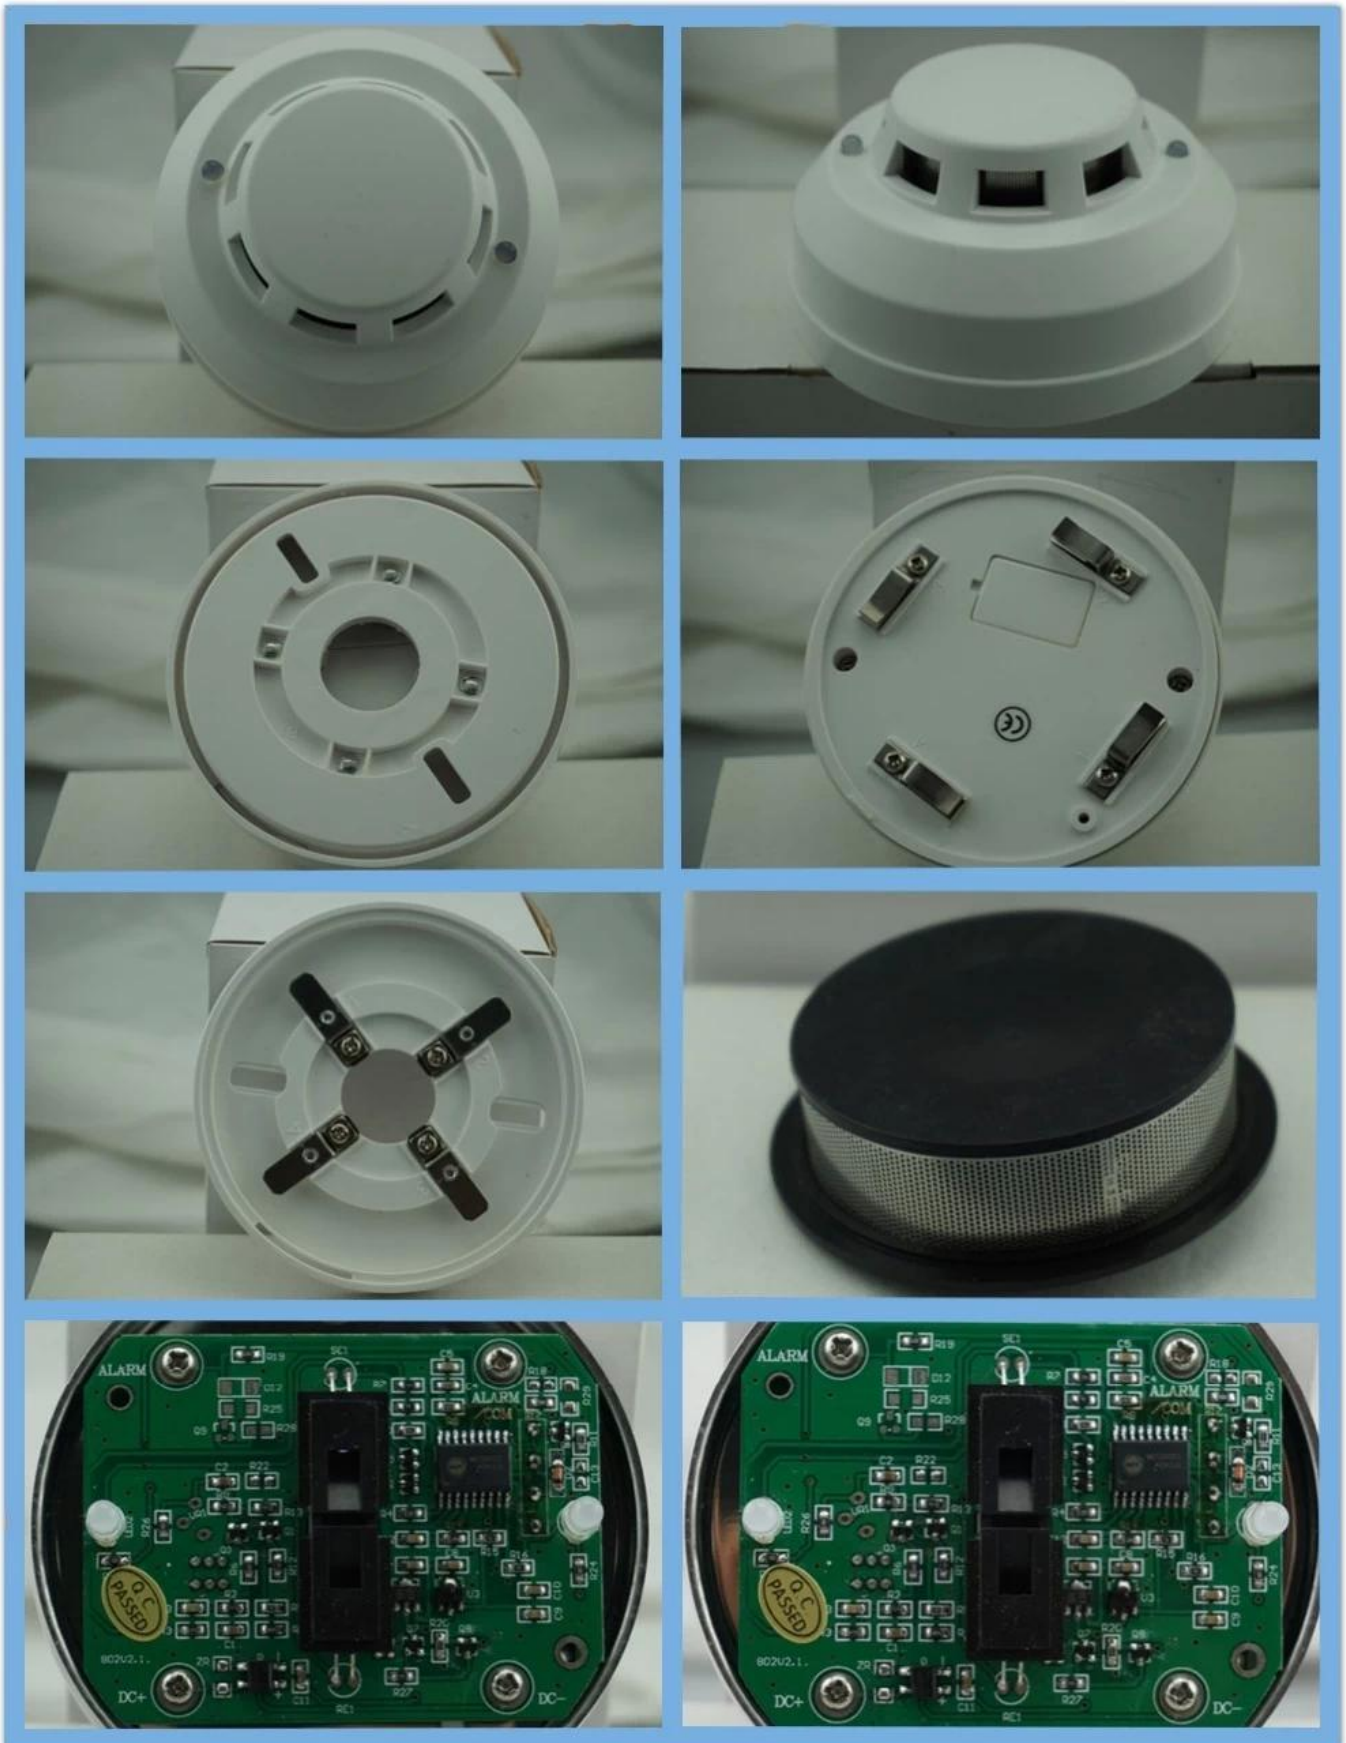

Wireless emergency strobe alarm siren output is 9V and 12V DC used for alarm system.

• *Dimension*

SMQT[®]



• *Feature*

SMQT[®]

Smoke detector for home security system
Big discounts!!
Best price!!



CE&ROSH
certificate



4 wires smoke detector



Welcome OEM and ODM

1.This product is non-coding type smoke detectors, and having a pair of switch output contacts, according to the actual need to select the normally open or normally closed output. During normal operation, the indicator flashes once every nine seconds, alarm, indicator

light, and alarm output contacts operation.

2.Power reset / automatic reset optional

3.Promise of Power Input

4.Alarm output NCOptional

- 5. Network output / LED indicates an alarm
- 6. SMT process, strong stability
- 7. Dustproof, anti-mosquito, anti-white light interference design
- 8. Metal shielding, RFI (20V / m-1GHz)

• *Packaging & shipping*

SMQT®



• *Office show*

SMQT®



● Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

