

● Parameter

SMQT®

Dimensions	41L * 27W * 8 (mm)
Connection	Normally open / normally closed
Operating distance	20 ± 5 (mm)
Maximum pressure	≤100VDC
Load current	≤500mA
Working Power	≤10W
Housing Material	ABS fireproof material
Shape color	Brown / White
Scope	Non-ferrous door or window
product weight	12g

● Introduction

SMQT®

The Magnetic contact sensor setting:

back of adhesive tape to provide easily installed in the door or window. Ideal security office, home, shops, entrance. When someone illegally open door or window, it will send an alarm signal immediately and the control panel receives the alarm signal , the 120-decibel alarm siren sound.

The wired door sensor with the 2 contact: NO. COM or NC .COM. This door contact switch has 2 color: Brown and White for choose.

Door and window magnetic contact sensor with 2 colors of white and black select horizontal door alarm door sensor.The door contact switch also can use on window.


● Dimesion Picture

SMQT®



● Installations

SMQT®

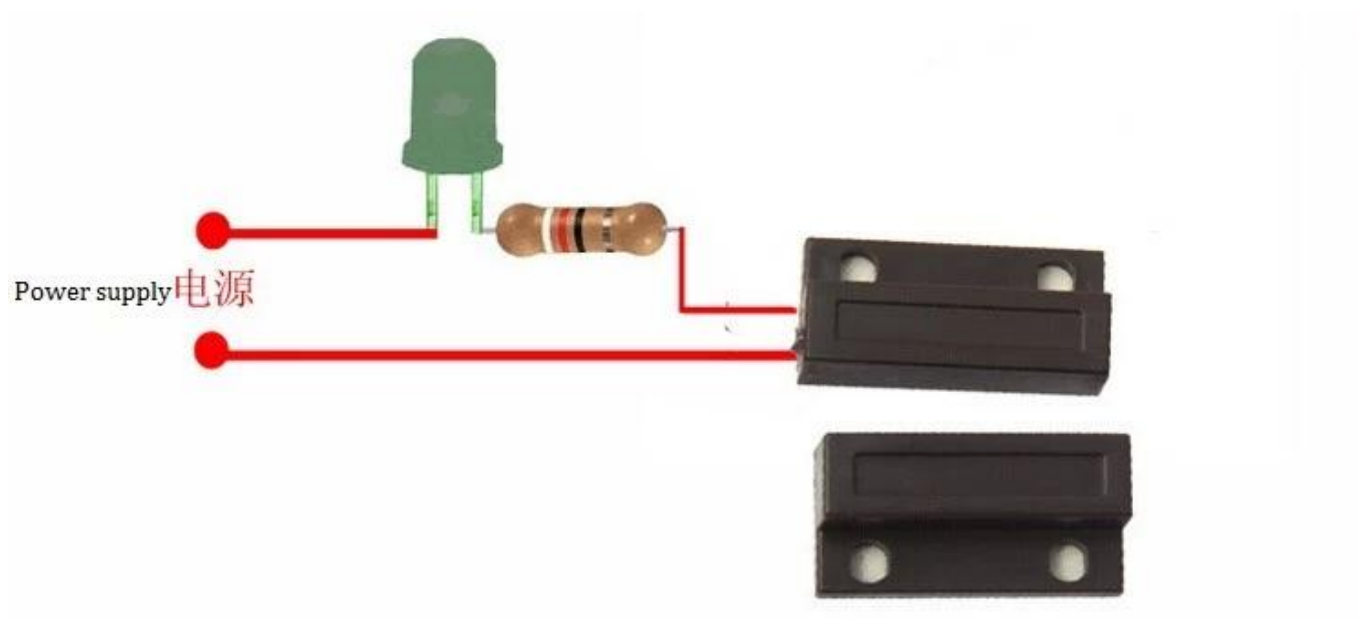

● accessories

SMQT®



● Packing list

SMQT®

Qty	1600 / box
Packing Specifications	19.84Kg
Packing weight	37.5L * 30W * 29.5H (cm)

● Office

SMQT®



● Exhibitions

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

